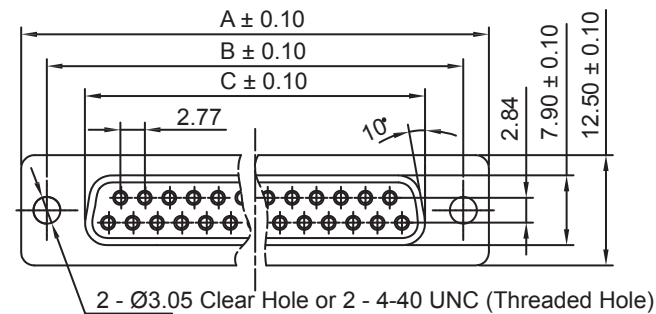
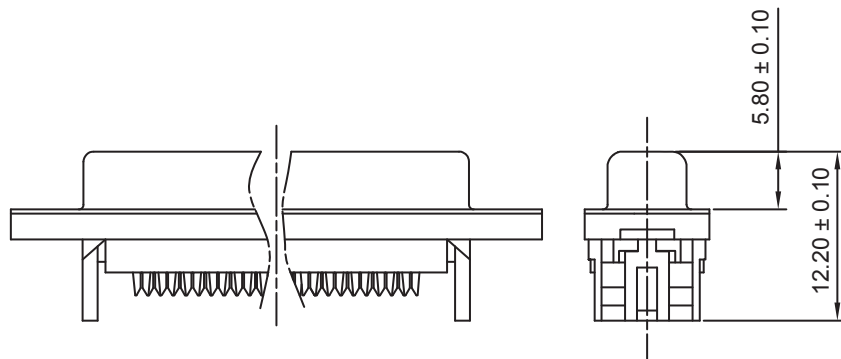


DIMENSION (mm)

NUMBER OF CONTACTS	A	B	C	D	E
09	30.85	24.99	16.33	15.05	18.80
15	39.14	33.32	24.66	23.65	26.90
25	53.04	47.04	38.38	37.05	40.50
37	69.32	63.50	54.84	53.70	56.65

ELECTRICAL:

CURRENT: 3 Amp

CONTACT RESISTANCE: < 25 milliohm Max.

INSULATOR RESISTANCE: > 1000 Megaohm MIN. at DC 500V

DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC FOR 1 MIN. RMS

OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: PBT + G.F. (UL94V-0)

CONTACT: COPPER ALLOY

CONTACT PLATING: OPTIONAL GOLD OR TIN ALL OVER NICKEL

SHELL: SPCC

HOW TO ORDER:

A 2 0 1 - X X 1 X - X 0 X - Z

CONTACT TYPE:

1 - FEMALE

NUMBER OF CONTACTS:

09, 15, 25, 37

SHELL PLATING:

1 - TIN PLATED

4 - NICKEL PLATED

MOUNTING OPTION:

1 - 3.05mm HOLE

2 - 4-40 UNC THREADED INSERT

SELECTIVE PLATING:

1 - Au FLASH CONTACT AREA/TIN TAIL

9 - 15u" Au CONTACT AREA/TIN TAIL

A - 30u" Au CONTACT AREA/TIN TAIL

RoHS

COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	11/29/18	
						IDC D-Subminiature Female Connector; 9,15,25 and 37 Position, Metal Shell
TOL. DEC.	.X +/- 0.38	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	P/N: A201-XX1X-X0X-Z