


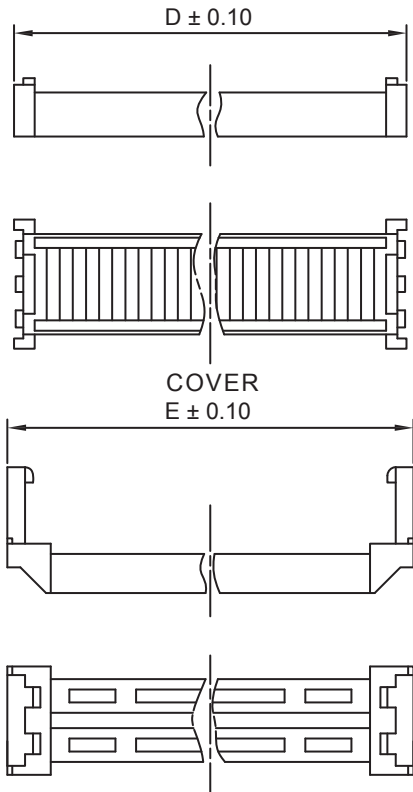

NUMBER OF CONTACTS	A	B	C	D	E
09	30.85	24.99	16.92	15.05	18.80
15	39.14	33.32	25.25	23.65	26.90
25	53.04	47.04	38.96	37.05	40.50
37	69.32	63.50	55.42	53.70	56.65

CURRENT: 3 Amp
CONTACT RESISTANCE: < 25 milliohm Max.
INSULATOR RESISTANCE: > 1000 Megaohm MIN. at DC 500V
DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC FOR 1 MIN. RMS
OPERATING TEMPERATURE: -55° C TO +105° C

INSULATOR: PBT + G.F. (UL94V-0)
CONTACT: COPPER ALLOY
CONTACT PLATING: OPTIONAL GOLD OR TIN ALL OVER NICKEL
SHELL: SPCC

A 2 0 2 - X X 1 X - X 0 X - Z

NUMBER OF CONTACTS:
09, 15, 25, 37

MOUNTING OPTION:
1 - 3.05mm HOLE
2 - 4-40 UNC THREADED INSERT

RoHS
COMPLIANT

SHELL PLATING:
1 - TIN PLATED
4 - NICKEL PLATED

SELECTIVE PLATING:
1 - Au FLASH CONTACT AREA/TIN TAIL
9 - 15u" Au CONTACT AREA/TIN TAIL
A - 30u" Au CONTACT AREA/TIN TAIL

Rev				Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued			B.S.	S.M.	S.M.	11/29/18		
									IDC D-Subminiature Male Connector; 9,15,25 and 37 Position, Metal Shell
TOL. DEC. .X +/- 0.38 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm								P/N: A202-XX1X-X0X-Z	Pg: 1