
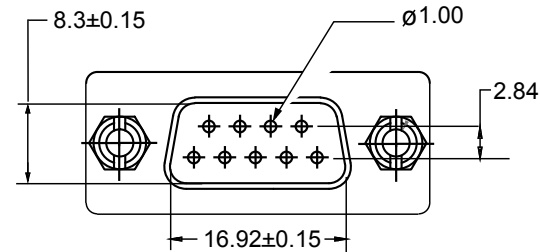
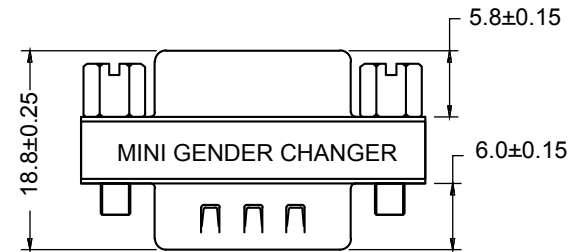


MALE TO MALE

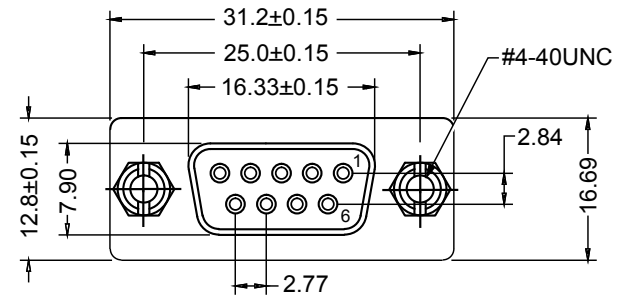

MALE TO FEMALE

NOTE:
PRINTING ON SIDE :
MINI GENDER CHANGER
ONE SIDE; OTHER SIDE
USA PATENT
YELLOW LABEL w/ BLACK
LETTERING

MATERIAL:

CONTACT: COPPER ALLOY; GOLD PLATED OVER NICKEL
INSULATOR: GLASS FILLED NYLON (UL94V-0)
SHELL: TIN PLATED STEEL

ELECTRICAL:

CURRENT RATING: 5A
CONTACT RESISTANCE: < 30mΩ
INSULATOR RESISTANCE: > 1000MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MI
OPERATING TEMPERATURE: -55° C TO +105° C

A 2 9 0 - 0 9 X 0 - 0 0 0 - Z

NUMBER OF CONTACTS:

09 - 9 Contacts

GENDER:

1 - MALE TO MALE
2 - MALE TO FEMALE

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0 Issued	B.S.	S.M.	S.M.	05/01/15	
SCALE					D-SUB CONNECTOR GENDER CHANGER ; 9 POSITION
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-0.15 ANGLE +/- UNIT: mm					SERIES: A 290-09X0-000-Z