

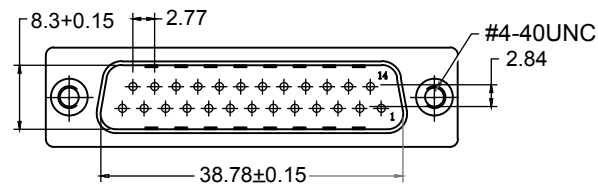
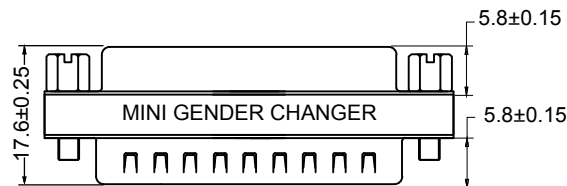
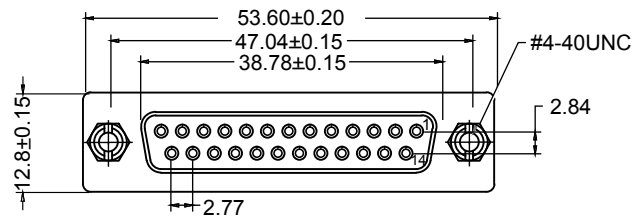
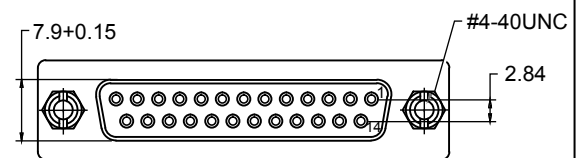


MALE TO MALE

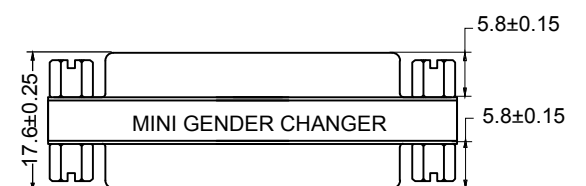

MALE TO FEMALE

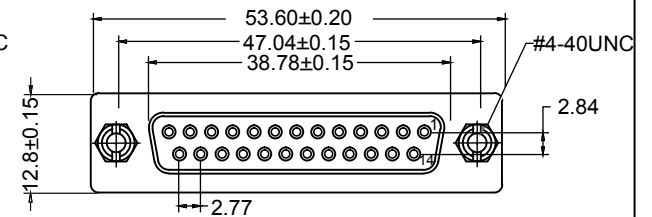

FEMALE TO FEMALE

MATERIAL:

CONTACT: COPPER ALLOY; GOLD PLATED OVER NICKEL
INSULATOR: GLASS FILLED NYLON (UL94V-0)
SHELL: TIN PLATED STEEL

ELECTRICAL:

CURRENT RATING: 5A
CONTACT RESISTANCE: < 30mΩ
INSULATOR RESISTANCE: > 1000MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MI
OPERATING TEMPERATURE: -55° C TO +105° C

NOTE:
PRINTING ON SIDE :
MINI GENDER CHANGER
ONE SIDE; OTHER SIDE
USA PATENT
YELLOW LABEL w/ BLACK
LETTERING

A 2 9 0 - 2 5 X 0 - 0 0 0 - Z

NUMBER OF CONTACTS:

25 - 25 Contacts

GENDER:

- 1 - MALE TO MALE
- 2 - MALE TO FEMALE
- 3 - FEMALE TO FEMALE

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0 Issued	B.S.	S.M.	S.M.	05/01/15	
D-SUB CONNECTOR GENDER CHANGER ; 25 POSITION					
SCALE					
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-0.15 ANGLE +/- UNIT: mm					SERIES: A 290-25X0-000-Z Pg: 1