
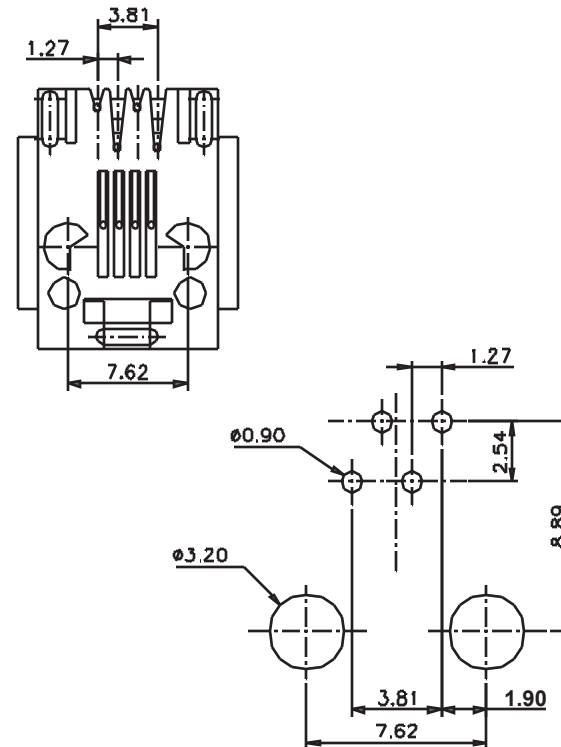
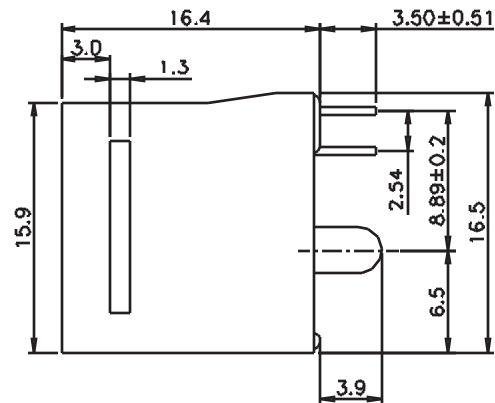


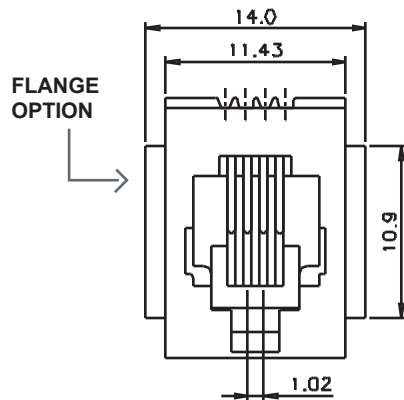

ENVIRONMENTAL:

STORAGE TEMP: -40° C TO +85° C
OPERATING TEMP: 0° C TO +70° C

ELECTRICAL:

VOLTAGE RATING: 125 VAC RMS
CURRENT RATING: 1.5 AMP
CONTACT RESISTANCE: 30 MINIOHMS MAX.
INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC
DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1 MIN

MATERIAL:

CONTACTS: Phosphor Bronze
PLASTIC HOUSING: Thermoplastic (UL94V-0)
PLATING: Gold Plating Over Nickel in Contact.
Tin Plating Over Nickel in Solder Area

HOW TO ORDER:

A	3	0	0	2	-	1	2	0	-	0	1	X	-	X	1	-	Z
				<u>NUMBER OF POSITIONS</u>			<u>NUMBER OF CONTACTS:</u>		<u>SHIELD OPTION:</u>		<u>KEYING OPTION:</u>		<u>PLATING OVERALL:</u>		<u>RoHS COMPLIANT</u>		
				1 - 4 Pos			2 - 4 CONTACTS		0 - NON SHIELDED		0 - NON KEYED		0 - FULL Au FLASH				
													1 - 10u" Au				
													2 - 30u" Au				
													3 - 50u" Au				