


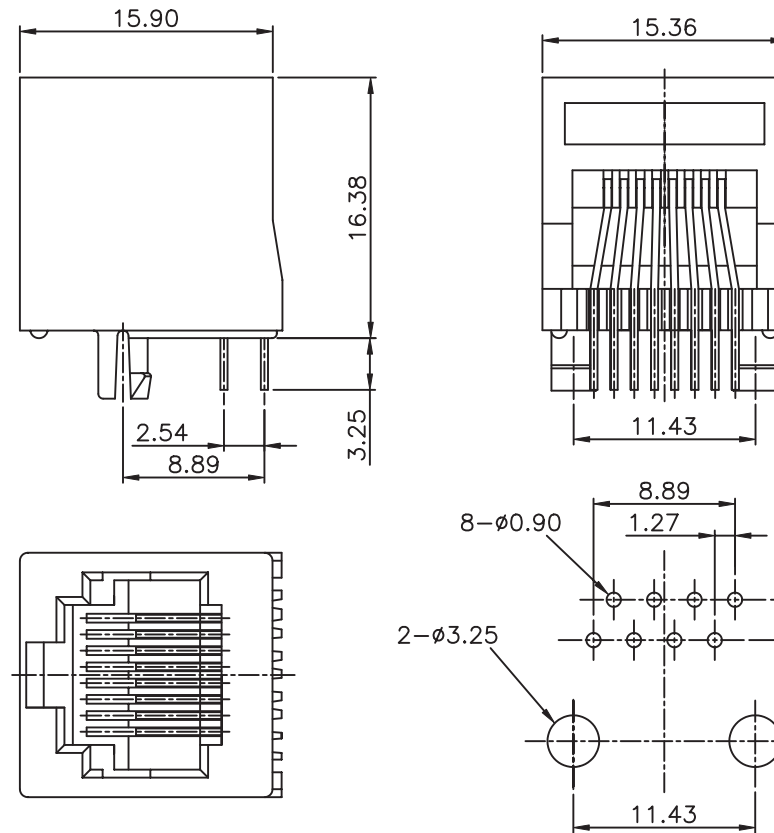

PCB LAYOUT/TOP VIEW

HOW TO ORDER:

A 3 0 0 2 - 3 4 0 - 0 1 X - X 0 - Z

NUMBER OF POSITIONS:
3 - 8 Pos

SHIELD OPTION:
0 - NON SHIELDED

NUMBER OF CONTACTS:
4 - 8 CONTACTS

NUMBER OF PORTS:
01 - SINGLE PORT

KEYING OPTION:
0 - NON KEYED
1 - w/KEY

PLATING OVERALL:
0 - FULL Au FLASH
1 - 10u" Au
2 - 30u" Au
3 - 50u" Au

SELECTIVE PLATING:
6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

0 - NO FLANGE

RoHS COMPLIANT

MATERIAL:
CONTACTS: Phosphor Bronze
PLASTIC HOUSING: Thermoplastic (UL94V-0)
PLATING: Gold Plating Over Nickel in Contact
Tin Plating Over Nickel in Solder Area

Rev		Drawn	Checked	Approved	Date	
0	Issued	WHS	S.M.	S.M.	10/10/03	SMP TECHNOLOGY, INC.
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	3/6/07	
B	Revised for Part No	B.S.	S.M.	S.M.	11/27/13	
SCALE:n/a						RJ45 (8P8C) Jack, Top Entry, Non-Shielded
TOL. DEC.	.X +/- 0.25	.XX +/- 0.13	.XXX +/- 0.05	ANGLE +/- 0°.30'	UNIT: mm	P/N: A3002-340-01X-X0-Z