


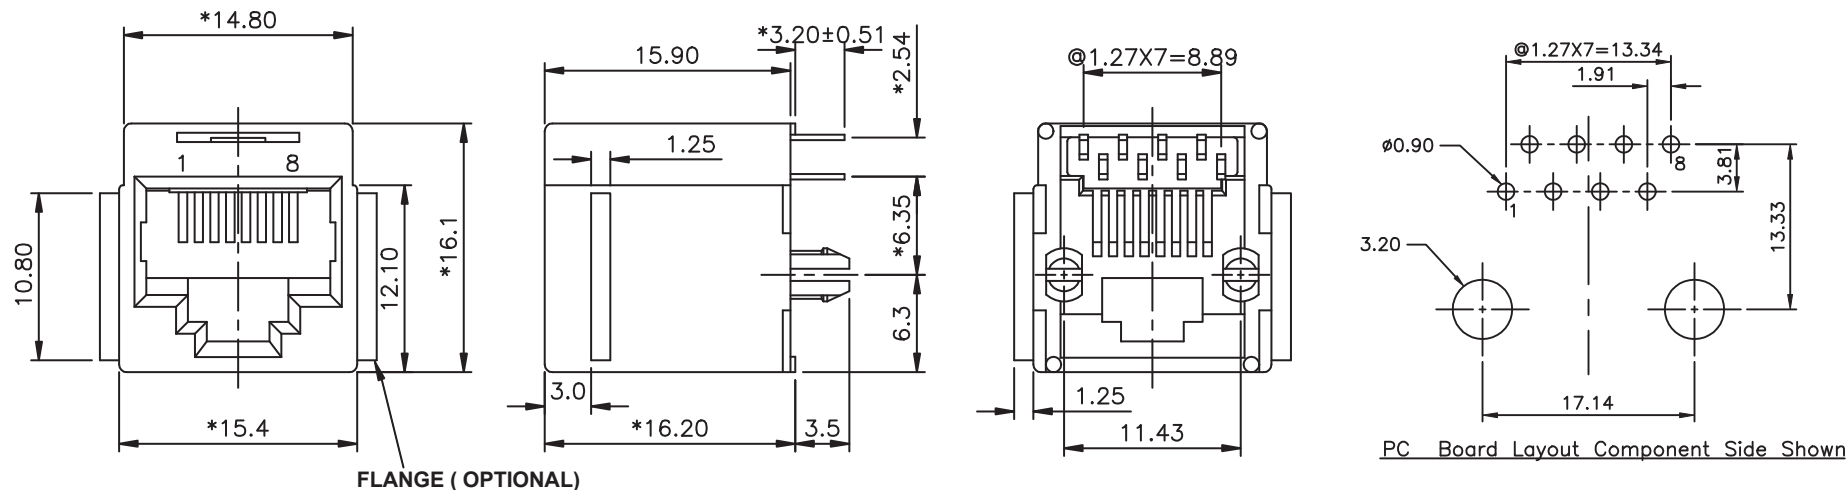

ELECTRICAL:

CURRENT RATING: 1.5A Max.
 VOLTAGE RATING: 125 VAC RMS
 CONTACT RESISTANCE: 30 Milliohms Max.
 OPERATING TEMPERATURE: -40°C TO +85°C
 INSULATOR RESISTANCE: 1000 Megaohms @ 500 VDC
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.


MATERIAL:

SPRING WIRE: 0.35mm Thickness Phosphor Bronze
 Gold Plating Over 50u" Nickel
 INSULATOR : High Temp Glass Filled Polyester 94V-0

ENVIRONMENTAL:

Mates with Modular Plug Conforming to FCC Part 68, Subpart F

HOW TO ORDER:

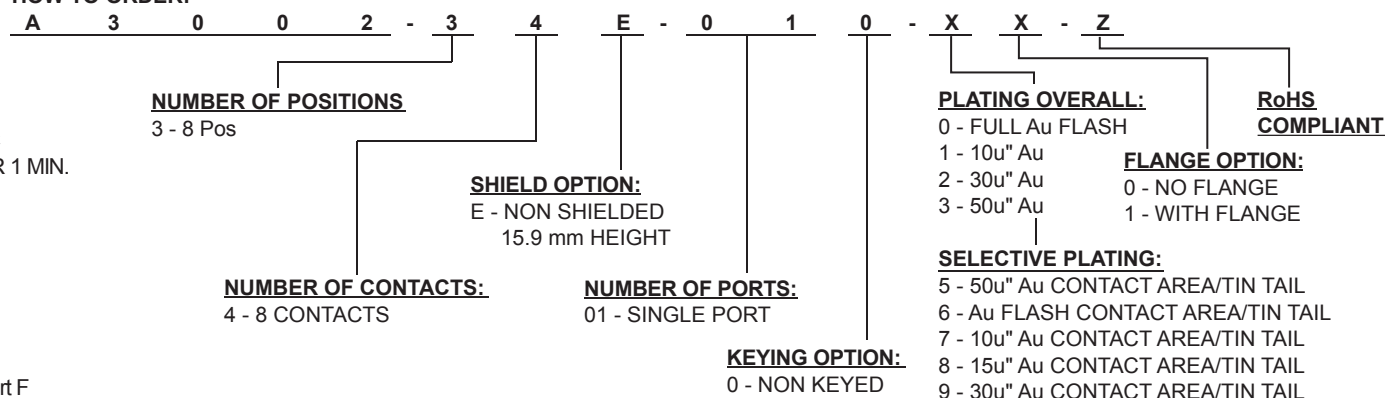

Rev		Drawn	Checked	Approved	Date
0	Issued	A.M.	S.M.	S.M.	04/15/05
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	6/21/07

SCALE:n/a

TOL. DEC. .X +/- 0.2 .XX +/- 0.15 .XXX +/- 0.075 ANGLE +/- 0.5 UNIT: mm

SMP TECHNOLOGY, INC.

RJ45 Top Entry, Non Shielded, Thru Hole; 15.9 mm Height ; 4 Sides Closed

SERIES: A3002 -34E-010-XX-Z

Pg: 1