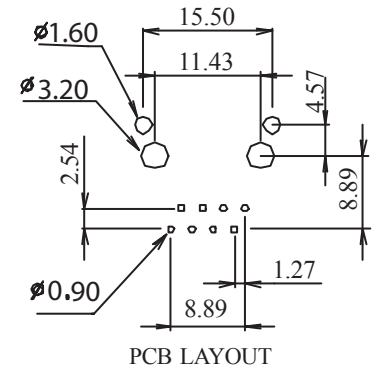
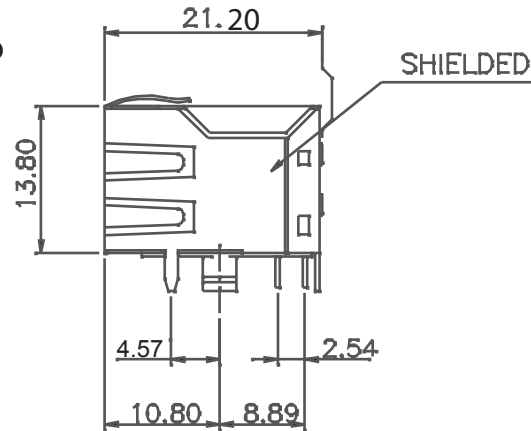
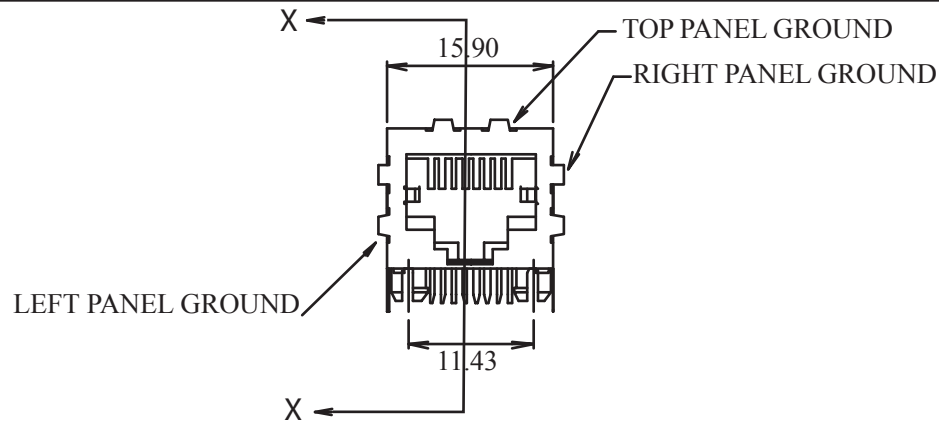


MATES WITH PLUG CONFORMING TO FCC PART 68, SUBPART F.

ELECTRICAL:

CURRENT RATING: 1.5A Min.

CONTACT RESISTANCE:

< 20 Milliohm Max.

INSULATION RESISTANCE:

> 500 Megaohm Min.

DIELECTRIC WITHSTANDING VOLTAGE:

1000V (rms) AC for 1 Minute

OPERATING TEMPERATURE: -25° C to +90° C

MATERIAL:

HOUSING: PBT Glass Filled (UL94V-0)

Nylon 6T Glass Filled (UL94V-0) 260 C Rated


COLOR: Black

SPRING WIRE: 0.45mm Thickness Phosphor Bronze

Gold Plating Over Nickel

DURABILITY: 500 Mating Cycles Min.

HOW TO ORDER:

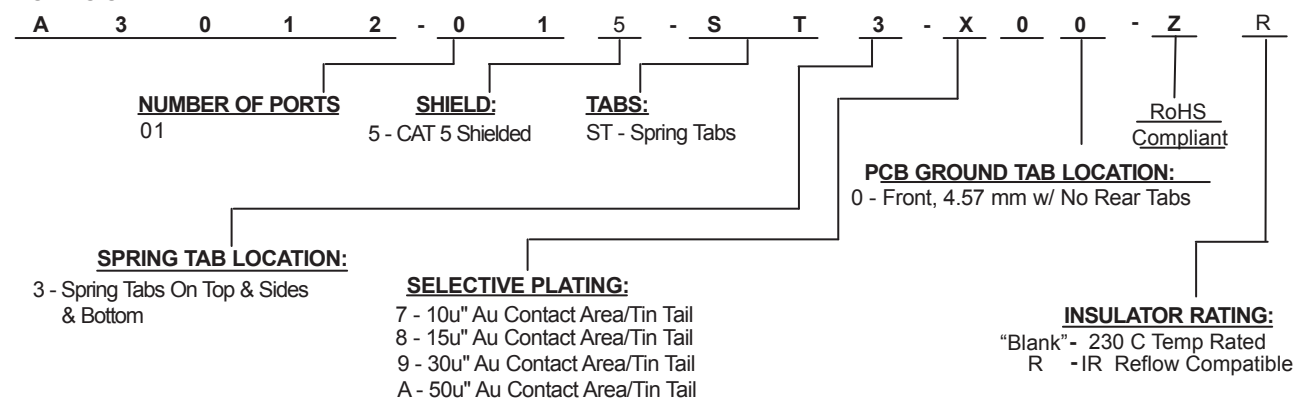

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	03/29/05
A	A.M.	S.M.	S.M.	04/20/08

SCALE: N/A

TOL. DEC. .XX +/- 0.25 .XXX +/- 0.13 .XXXX +/- 0.05 ANGLE +/- 0.30° UNIT: mm

SMP TECHNOLOGY, INC.

RJ45, 1 PORT, SIDE ENTRY, EMI SPRINGS, TABS ON TOP, SIDES &

BOTTOM, NO REAR TABS: CATEGORY 5

P/N: A3012-015-ST2-X00-ZR

Pg: 1