


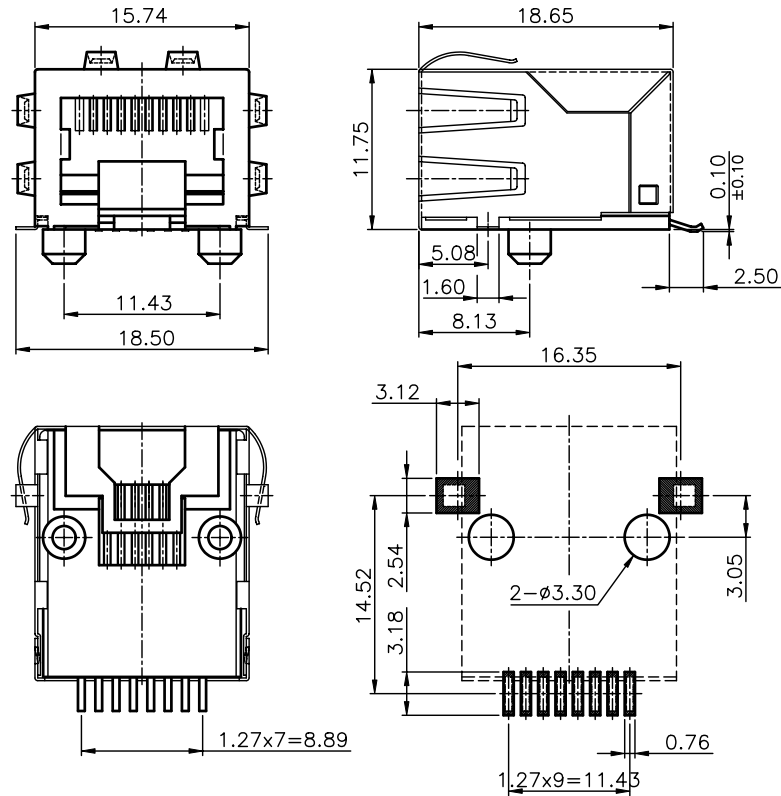

DIMENSION(mm)

NO. CONTACTS	A
2	1.27
4	3.81
6	6.35
8	8.89

ELECTRICAL:

CURRENT RATING: 1.5A
 CONTACT RESISTANCE: < 20mΩ
 INSULATOR RESISTANCE: > 500MΩ
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -25° C TO +85° C

MATERIAL:

CONTACT: PHOSPHOR BRONZE
 INSULATOR: ENGINEERING THERMOPLASTIC (UL94V-0)

HOW TO ORDER:

A7013-X3-010-X0-Z																			
NUMBER OF POSITIONS: 3 - 8 POS			NUMBER OF CONTACTS: 2 - 4 CON 4 - 8 CON 3 - 6 CON 5 - 10 CON			SHIELD: 3 - SHIELDED w/ SPRING TABS ON TOP & SIDES			NUMBER OF PORTS: 01			KEYING OPTION: 0 - W/ OUT KEY			FLANGE: 0 - NO FLANGE			RoHS COMPLIANT	
PLATING OVERALL: 0 - FULL Au 1 - 10u" Au 2 - 15u" Au 3 - 30u" Au SELECTIVE PLATING: 6 - Au CONTACT AREA/TIN TAIL 7 - 10u" Au CONTACT AREA/TIN TAIL 8 - 15u" Au CONTACT AREA/TIN TAIL 9 - 30u" Au CONTACT AREA/TIN TAIL A - 50u" Au CONTACT AREA/TIN TAIL																			

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	12/13/03
A	B.S.	S.M.	S.M.	08/27/08

SMP TECHNOLOGY, INC.

RJ45 Jack, High Speed Low Profile, Surface Mount w/Tabs on Top and Sides

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-0.15 ANGLE +/- UNIT: mm

P/N: A7013-3x3-010-x0-Z

Pg: 1