


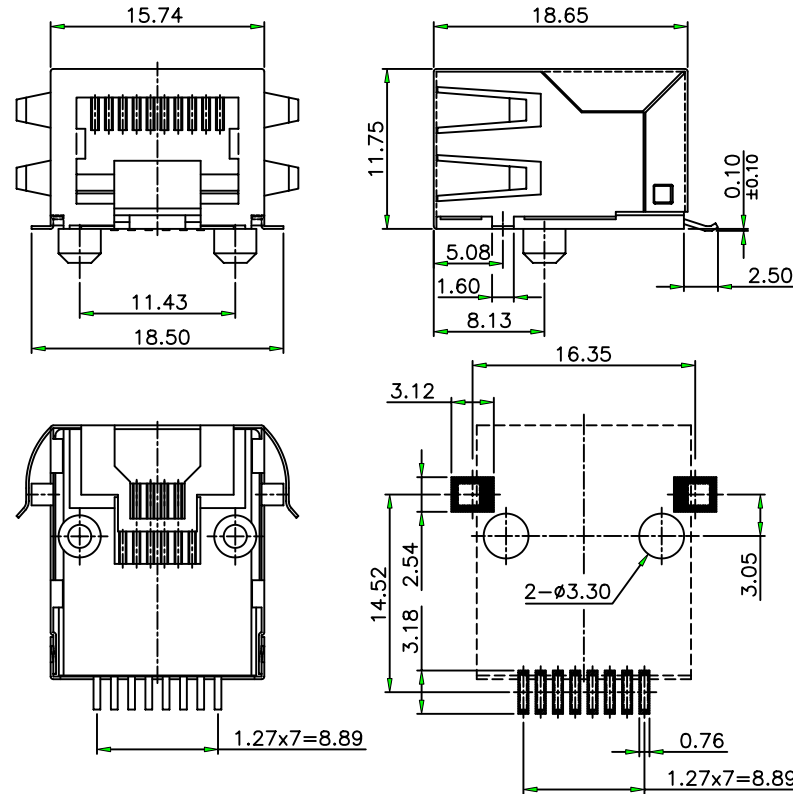

DIMENSION(mm)

NO. CONTACTS	A
2	1.27
4	3.81
6	6.35
8	8.89

ELECTRICAL:

CURRENT RATING: 1.5A
 CONTACT RESISTANCE: < 20m W
 INSULATOR RESISTANCE: > 500M W
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -25° C TO +85° C

MATERIAL:

CONTACT: PHOSPHOR BRONZE
 INSULATOR: GLASS FILLED POLYESTER (UL94V-0)

HOW TO ORDER:

A 7 0 1 3 - 3 X 8 - 0 1 0 - X 0 - Z																	
NUMBER OF POSITIONS:			NUMBER OF CONTACTS:				KEYING OPTION:			PLATING OVERALL:			FLANGE:			RoHS COMPLIANT	
3 - 8 POS			2 - 4 CON		4 - 8 CON		0 - W/ OUT KEY			0 - FULL Au			0 - NO FLANGE				
			3 - 6 CON		5 - 10 CON					1 - 10u" Au							
										2 - 15u" Au							
										3 - 30u" Au							
													SELECTIVE PLATING:				
													6 - Au CONTACT AREA/TIN TAIL				
													7 - 10u" Au CONTACT AREA/TIN TAIL				
													8 - 15u" Au CONTACT AREA/TIN TAIL				
													9 - 30u" Au CONTACT AREA/TIN TAIL				
													A - 50u" Au CONTACT AREA/TIN TAIL				
					</												

Rev		Drawn	Checked	Approved	Date
0	Issued	A.M.	S.M.	S.M.	12/13/03
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	08/27/08
B	Added Plating Option A	B.S.	S.M.	S.M.	09/21/17

SMP TECHNOLOGY, INC.

RJ45 Jack, High Speed Low Profile, Surface Mount w/Tabs on Sides

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-0.15 ANGLE +/- UNIT: mm

P/N: A7013-3x8-010-x0-Z

Pg: 1