

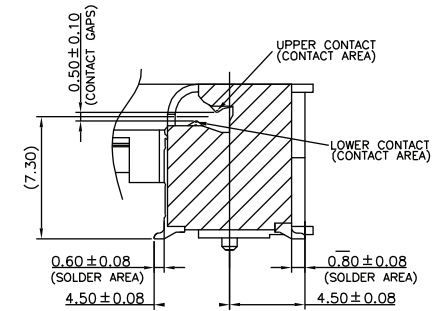
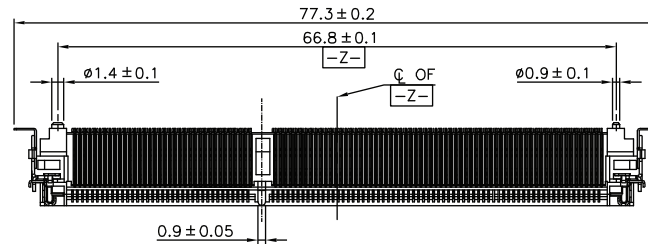


NOTES:

1. Recommended Reflow
Temperature 260°C (5 Sec.)
2. Voltage Rating: 25 VAC
3. Current Rating: 0.5 A
4. Temperature Rating: -55 C to 85 C

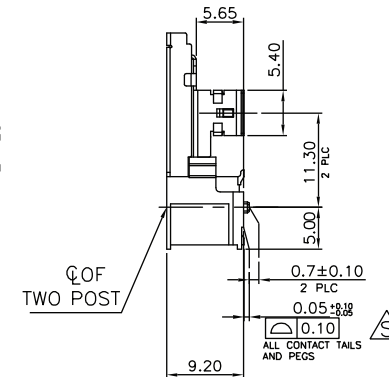

CROSS SECTIONAL A-A

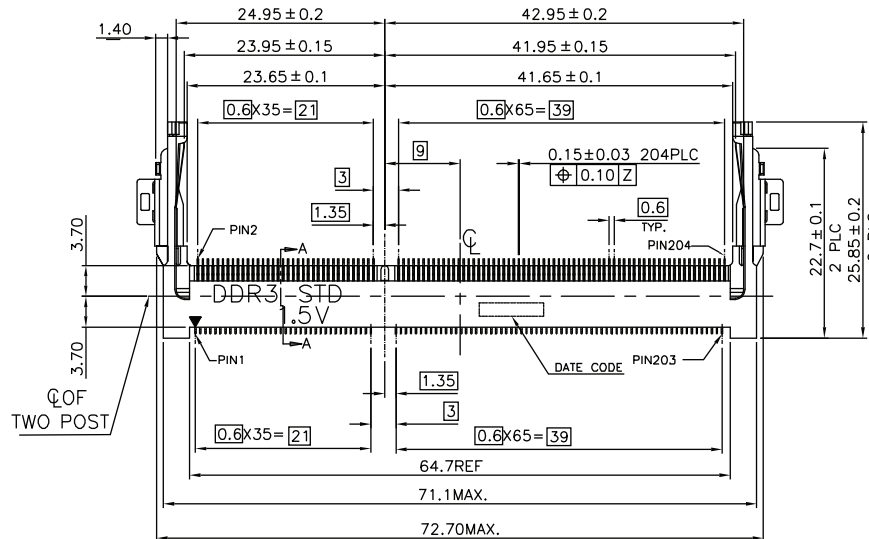

HOW TO ORDER:

B 0 3 0 - 2 0 4 3 - B 0 X X - Z

NUMBER OF CONTACTS: 204

HEIGHT OPTION: B - 9.2mm

ORIENTATION: 0 - Standard

PLATING OPTIONS: 2 - Au FLASH, 6 - 15u" Au

PACKAGING: 0 - Tray, 1 - Tape & Reel (Normal), 2 - Tape & Reel (Reverse)





RoHS COMPLIANT

KEY TYPE / VOLTAGE OPTION : 3 - 1.5V TYPE


MATERIAL:




CONTACT PLATING: Specified Au Thickness in Contact Area
Au Flash on Solder Tails; 50u" Nickel Sub Plate
Nickel Sub Plate (80"m min)
HOUSING: High Temp Thermo Plastic UL94V-0, Black
METAL LATCH: Stainless Steel
FLOATING LATCH: Stainless Steel
FIXED LATCH: Stainless Steel
CONTACT: Copper Alloy

Rev	Description	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	09/02/10		
						DDR SO DIMM Socket, 204 Position, 1.5 Volt	
						Standard Orientation, Right Angle, 9.2mm Height, Type 2	
						P/N: B 0 3 0 - 2 0 4 3 - B 0 X X - Z	
TOL. DEC. .X +/- 0.40 .XX +/- 0.25 .XXX +/- 0.15 .XXXX +/- 0.05 ANGLE +/- 3° UNIT: mm						Pg: 1 of 5	

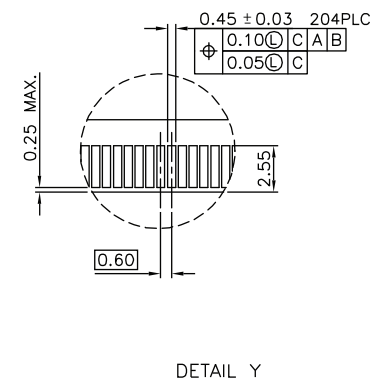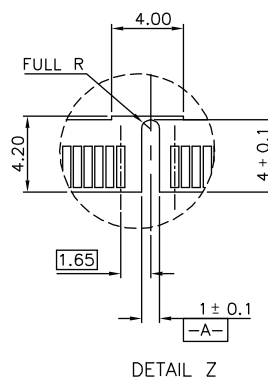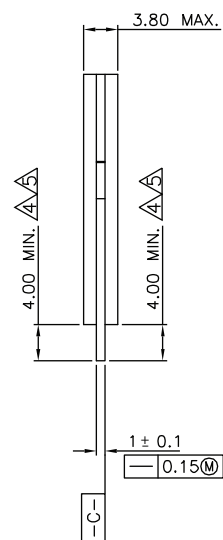


5 BORDER OF COMPONENT AREA.



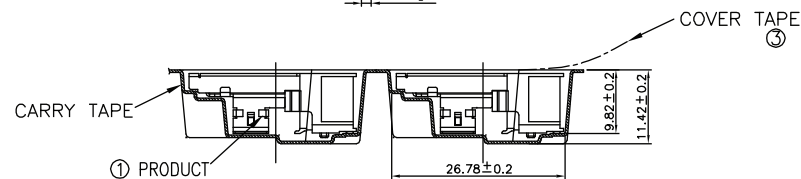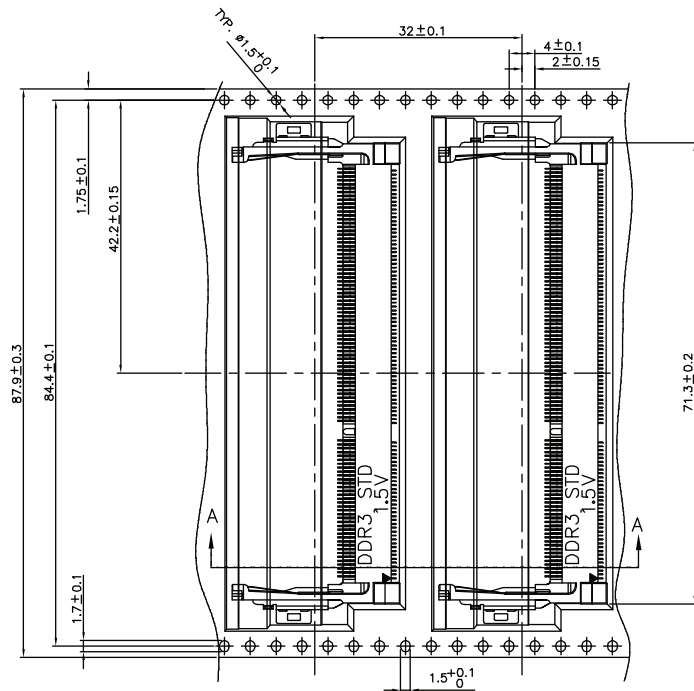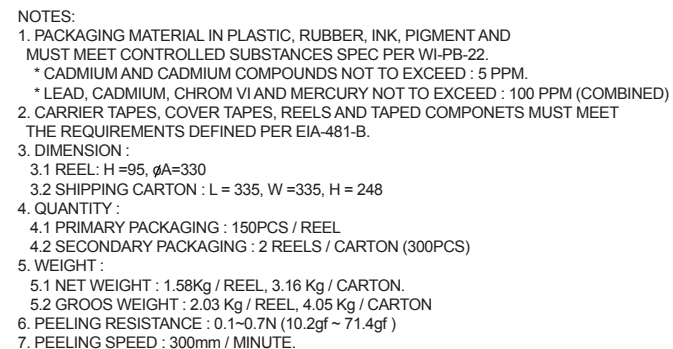

Section A-A
Packaging Direction: Tape & Reel Reverse

Pg: 4 of 5

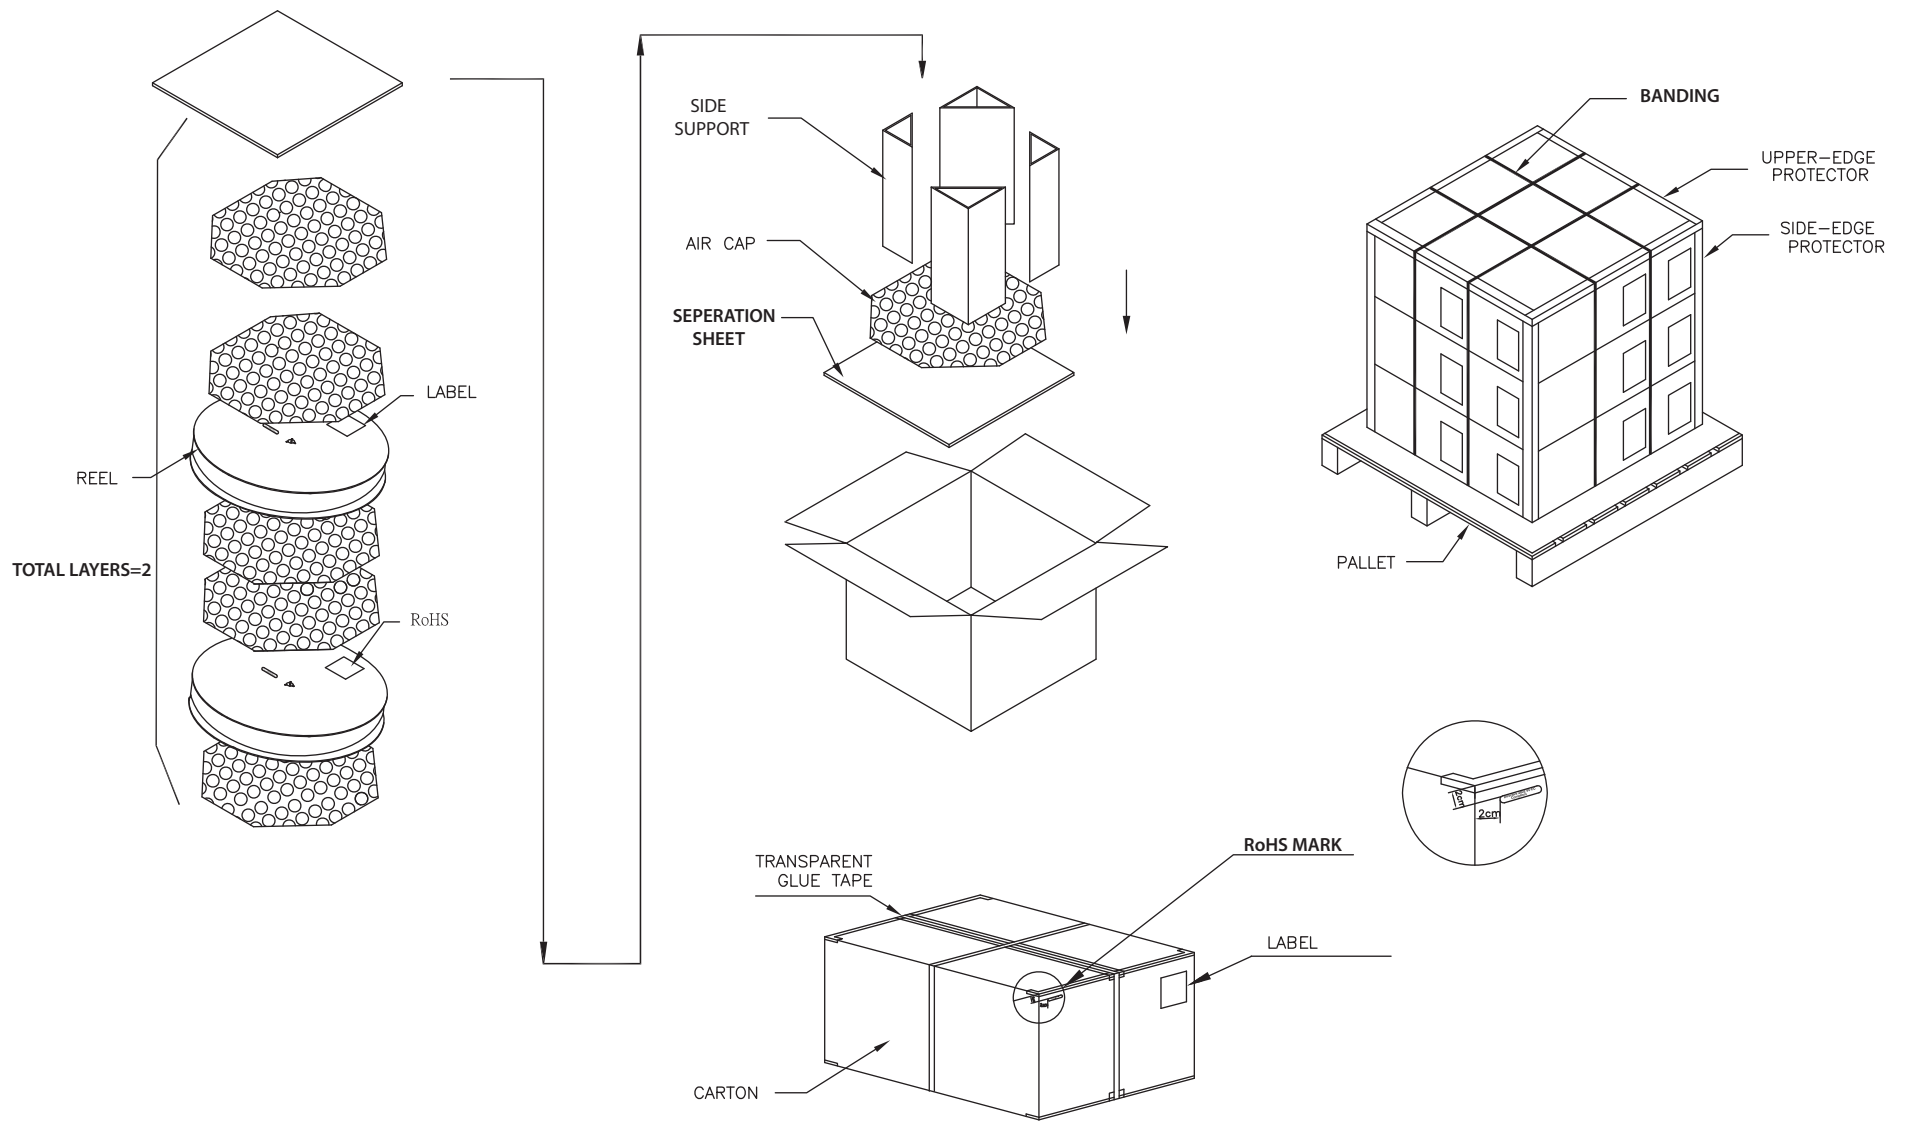

SMP TECHNOLOGY, INC.

DDR SO DIMM Socket, 204 Position, 1.5 Volt

Standard Orientation, Right Angle, 9.2mm Height, Type 2

P/N: B 0 3 0 - 2 0 4 3 - B 0 X X - Z

Pg: 5 of 5