

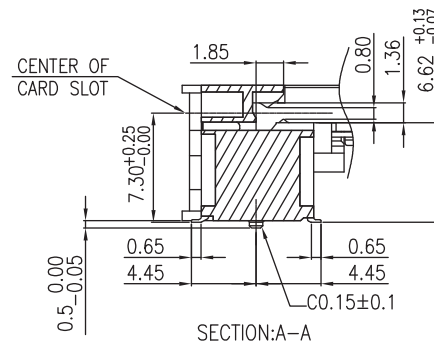
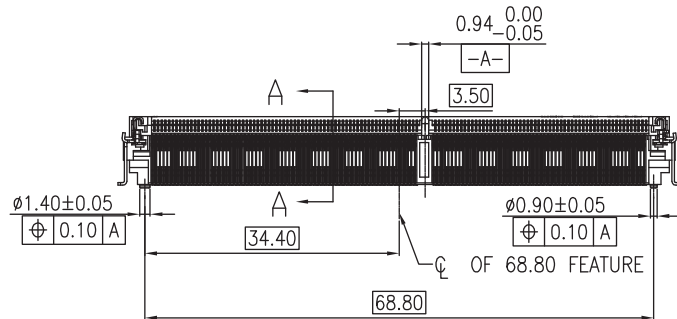


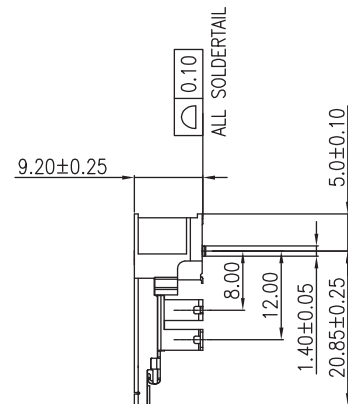

LEAD FREE

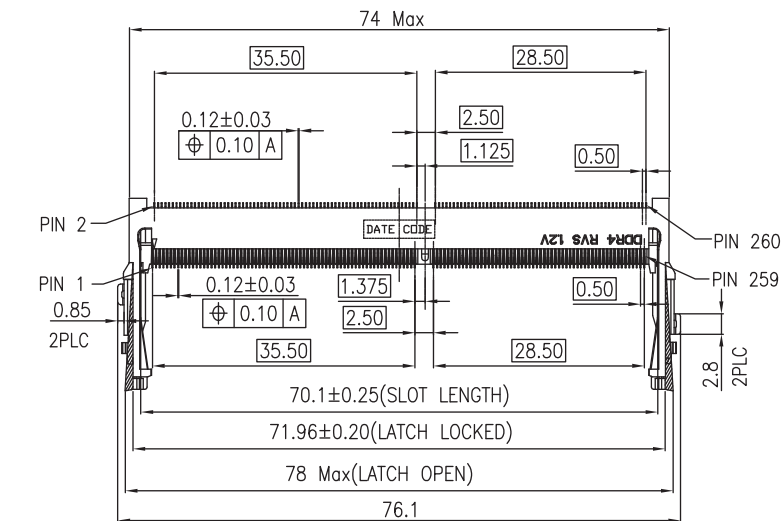



HOW TO ORDER:


B	0	3	0	-	2	6	0	4	-	5	1	X	X	-	Z	HF
NUMBER OF CONTACTS:												CONTACT AREA PLATING:		RoHS COMPLIANT		HALOGEN FREE
260												2 - Full Au Flash		0 - Tray		1 - Tape & Reel (Normal)
HEIGHT OPTION:												5 - 9.2mm		ORIENTATION:		1 - Reverse
KEY TYPE / VOLTAGE OPTION:												4 - 1.2 Volt		PACKAGING:		HALOGEN FREE

MATERIAL:


HOUSING: High Temp Thermo Plastic UL94V-0, Black
LATCH: Stainless Steel
CONTACT: Phosphor Bronze
CONTACT PLATING: Specified Au Thickness in Contact Area,
Au Flash on Solder Tail Over 50u" Nickel Subplate

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.		
					DDR 4 SO DIMM Socket, 260 Position, 1.2Volt,	
					Reverse Orientation, 9.2mm Height, Type A	
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15					P/N: B030-2604-51XX-ZHF	
ANGLE +/- 3° UNIT: mm					Pg: 1 of 4	

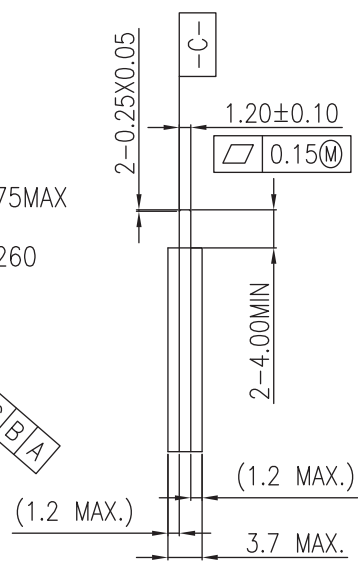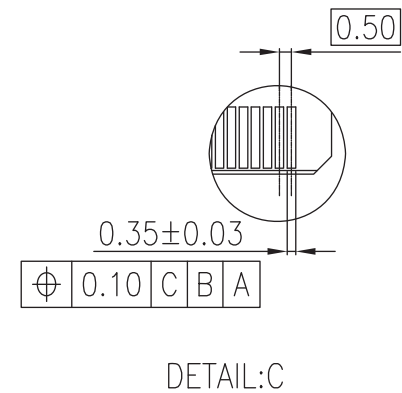


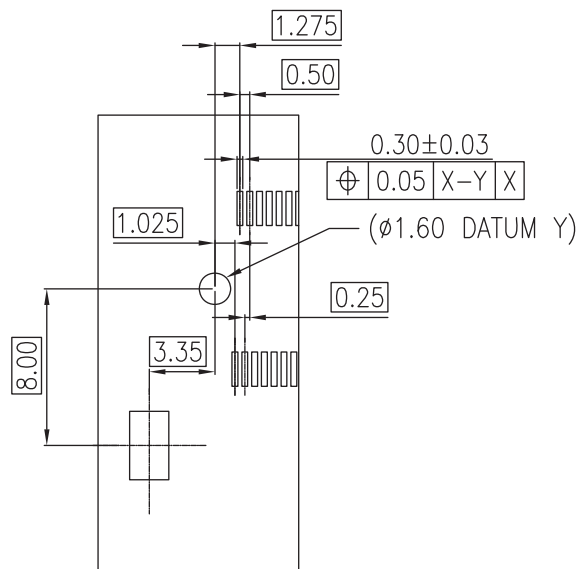

DETAIL:D

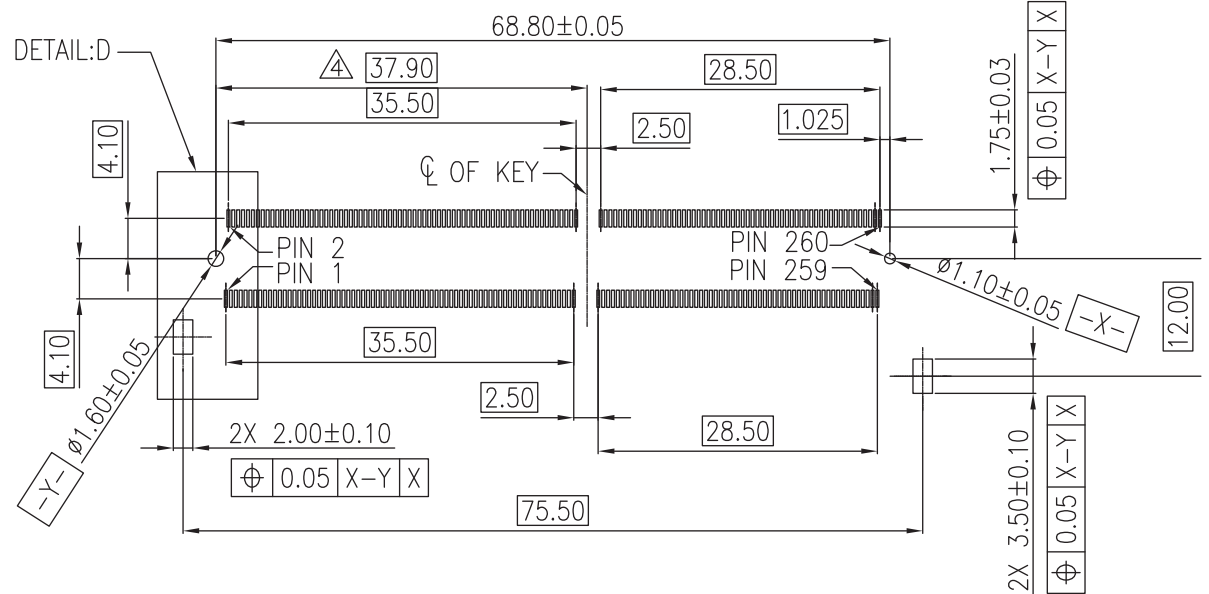


RECOMMENDED PCB LAYOUT COMPONENT SITE

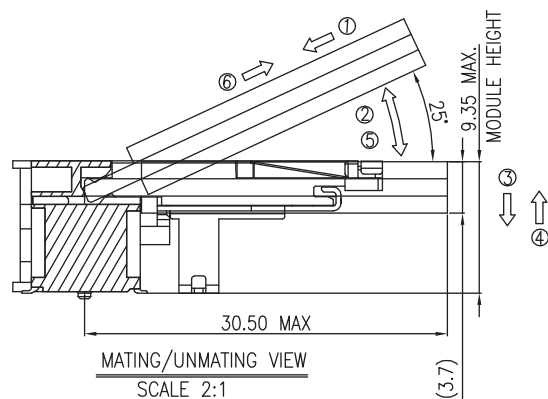




MATING: ① INSERTING(30°) — ② ROTATING — ③ FIXED
UNMATING: ④ UNFIXED — ⑤ ROTATING — ⑥ WITHDRAWING

SMP TECHNOLOGY, INC.

DDR 4 SO DIMM Socket, 260 Position, 1.2Volt,
Reverse Orientation, 9.2mm Height, Type A

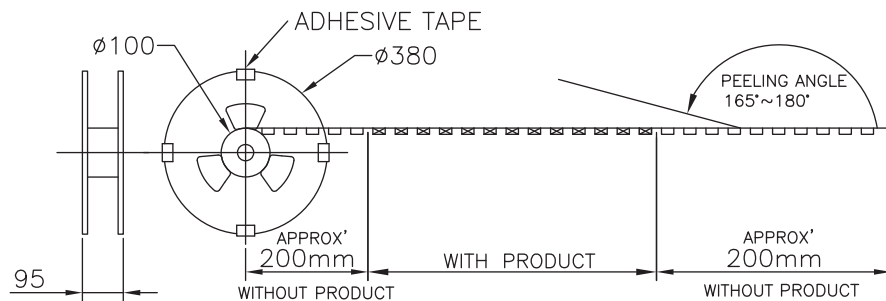


PULL OUT DIRECTION →

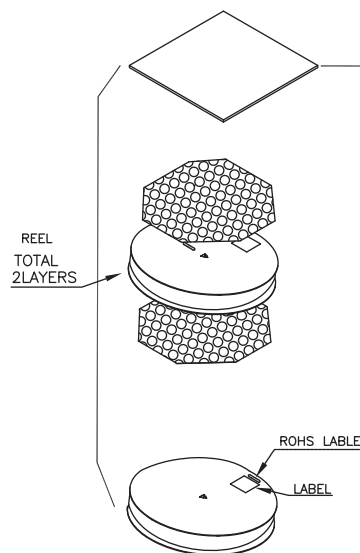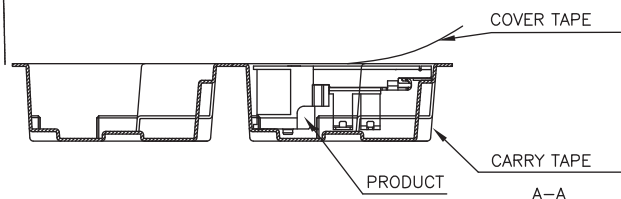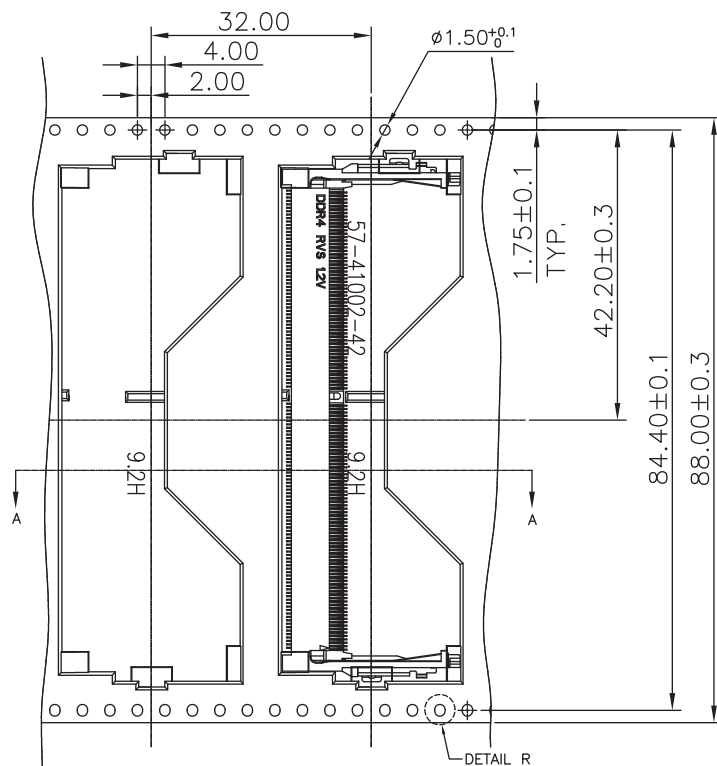

Notes:

1. 250 Pcs / Reel, 2 Reels / Carton

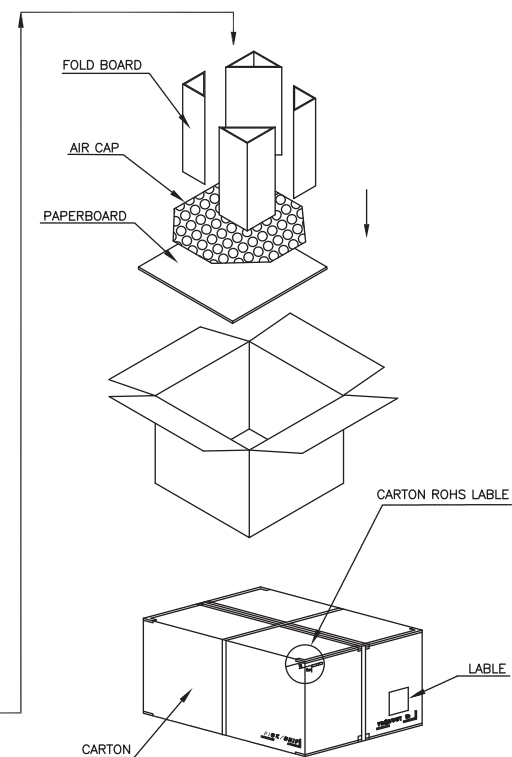

SMP TECHNOLOGY, INC.

DDR 4 SO DIMM Socket, 260 Position, 1.2Volt,
Reverse Orientation, 9.2mm Height, Type A