


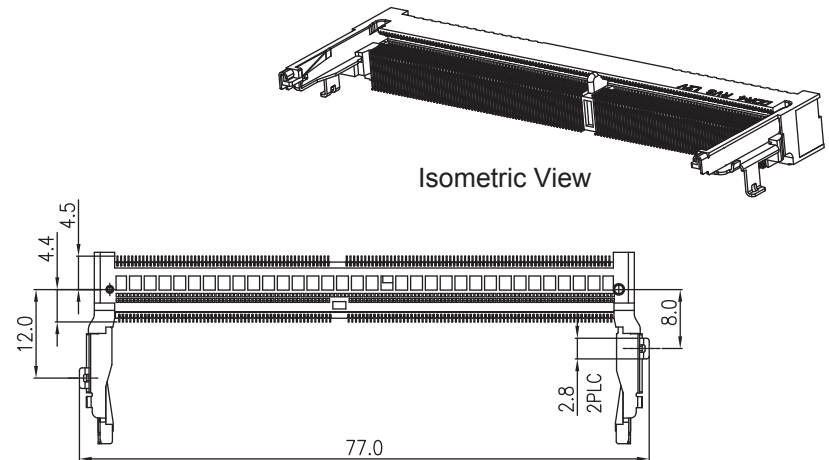
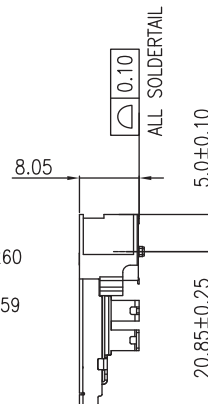


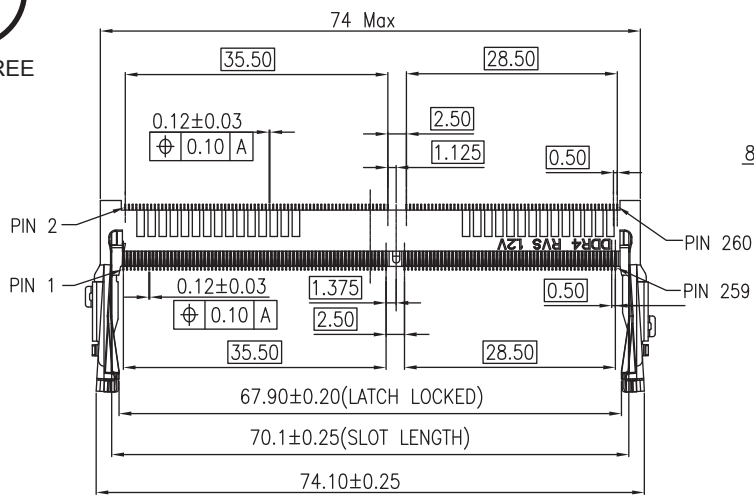

LEAD FREE

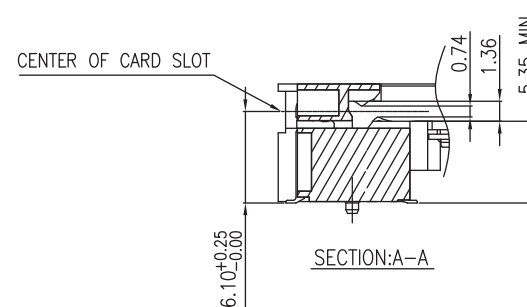

Isometric View

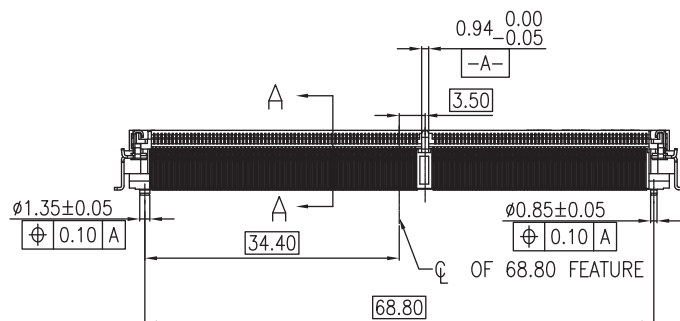

SECTION:A-A

HOW TO ORDER:



B	0	3	0	-	2	6	0	4	-	7	1	X	X	-	Z	HF
NUMBER OF CONTACTS:												PLATING:				
260												2 - Full Au Flash				
												5 - 10μ" Au				
												6 - 15μ" Au				
												8 - 30μ" Au				
												PACKAGING:				
												0 - Tray				
												1 - Tape & Reel (Normal)				
												2 - Tape & Reel (Reverse)				
												RoHS COMPLIANT				
												HALOGEN FREE				

MATERIAL:



HOUSING: High Temp Thermo Plastic UL94V-0, Black
LATCH: Stainless Steel
CONTACT: Copper Alloy
CONTACT PLATING: Specified Au Thickness in Contact Area
See Contact Area Plating Option

KEY TYPE / VOLTAGE OPTION:
4 - 1.2 Volt


Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.		
					DDR 4 SO DIMM Socket, 260 Position, 1.2V, Reverse Orientation, 8.0mm Height, Type A	
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15					P/N: B030-2604-71XX-ZHF	
ANGLE +/- 3° UNIT: mm					Pg: 1 of 4	

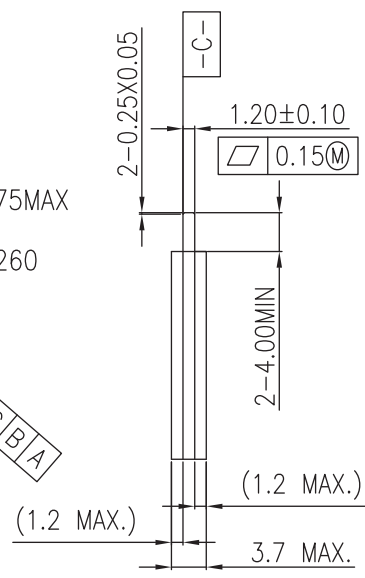

Pg: 2 of 4

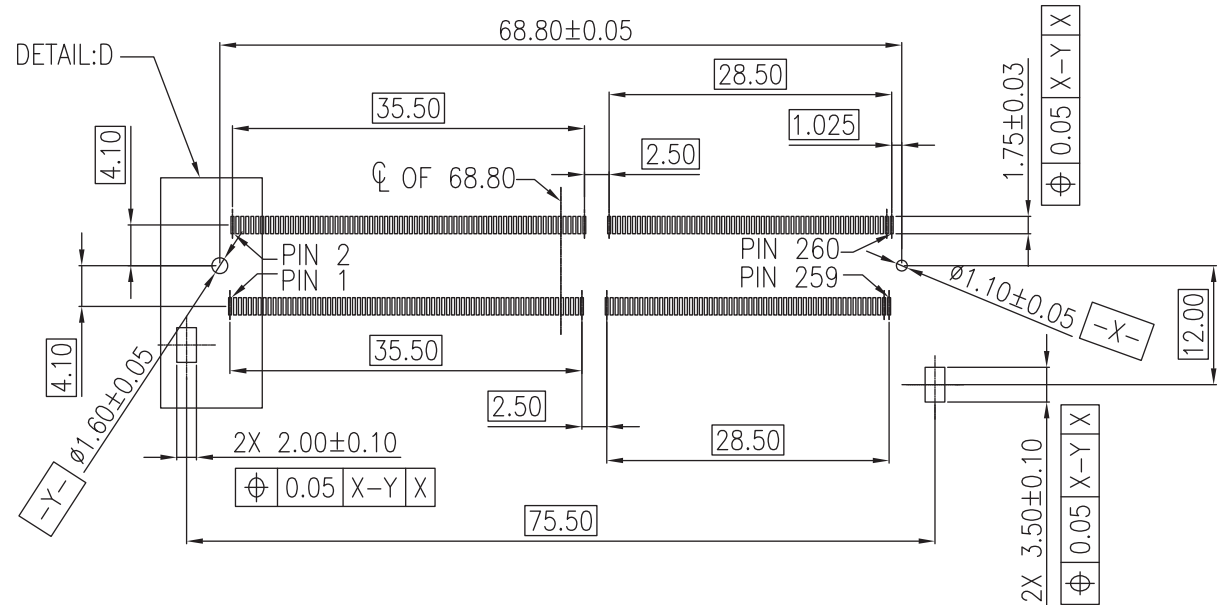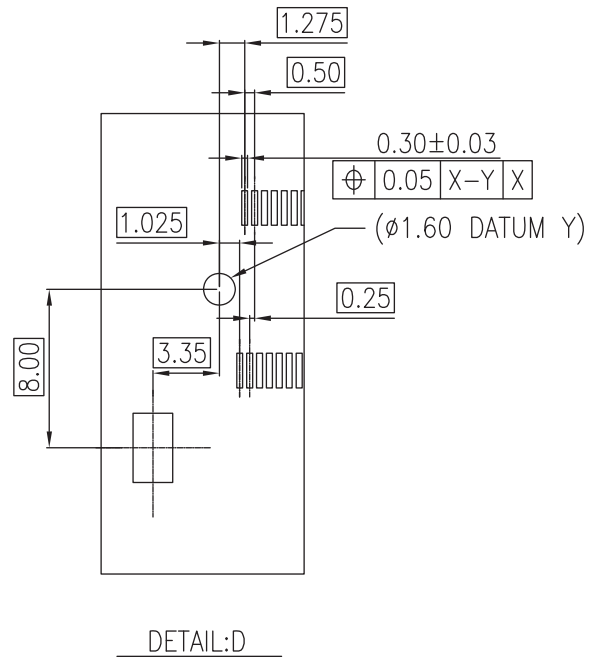


RECOMMENDED PCB LAYOUT

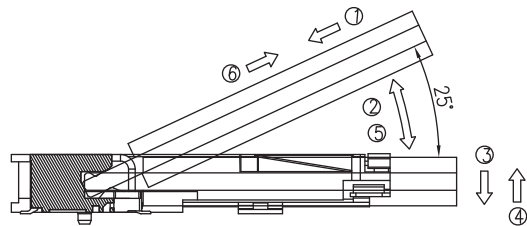

MATING: ① INSERTING(30°) — ② ROTATING — ③ FIXED
 UNMATING: ④ UNFIXED — ⑤ ROTATING — ⑥ WITHDRAWING




SMP TECHNOLOGY, INC.

DDR 4 SO DIMM Socket, 260 Position, 1.2Volt,
 Reverse Orientation, 8.0mm Height, Type A

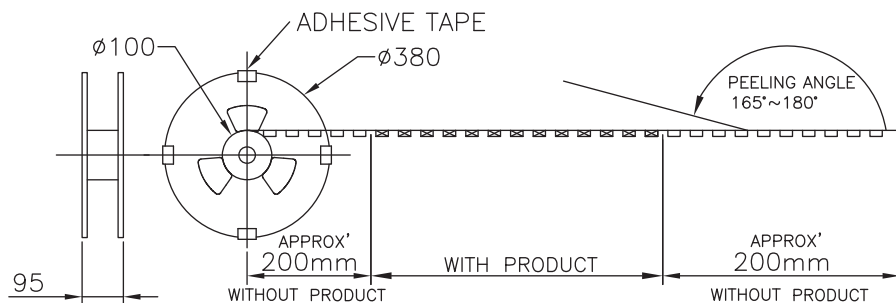

Notes:

1. 250 Pcs / Reel, 2 Reels / Carton
2. Net Weight / Carton: 2.86Kg
3. Gross Weight / Carton: 5.00Kg

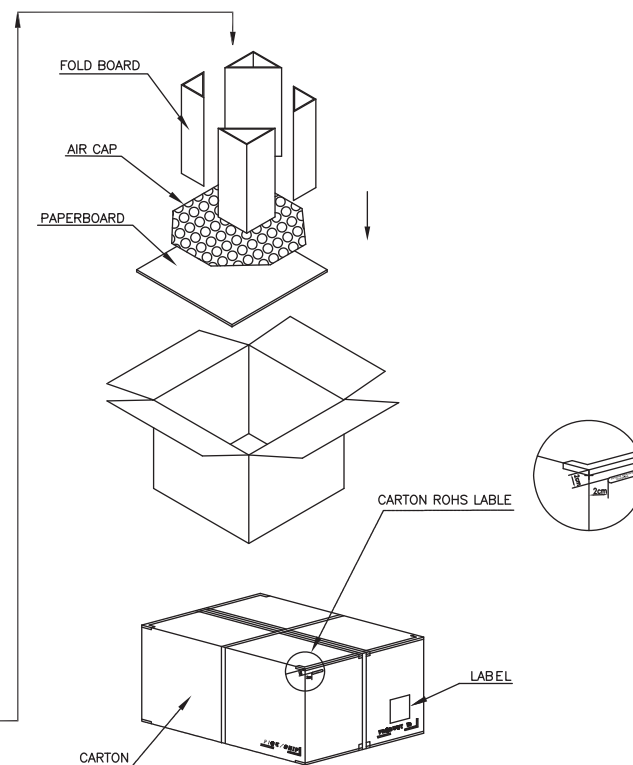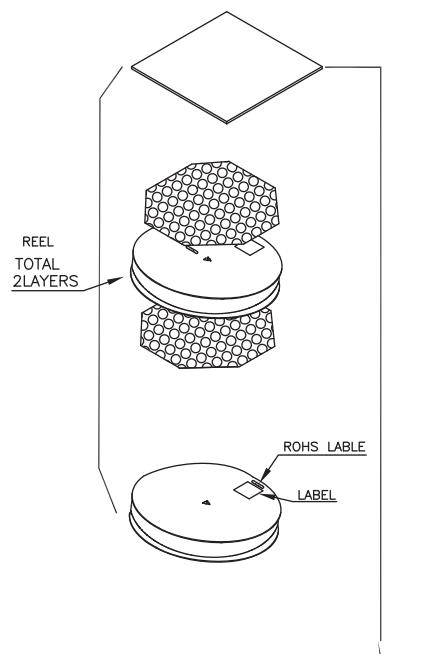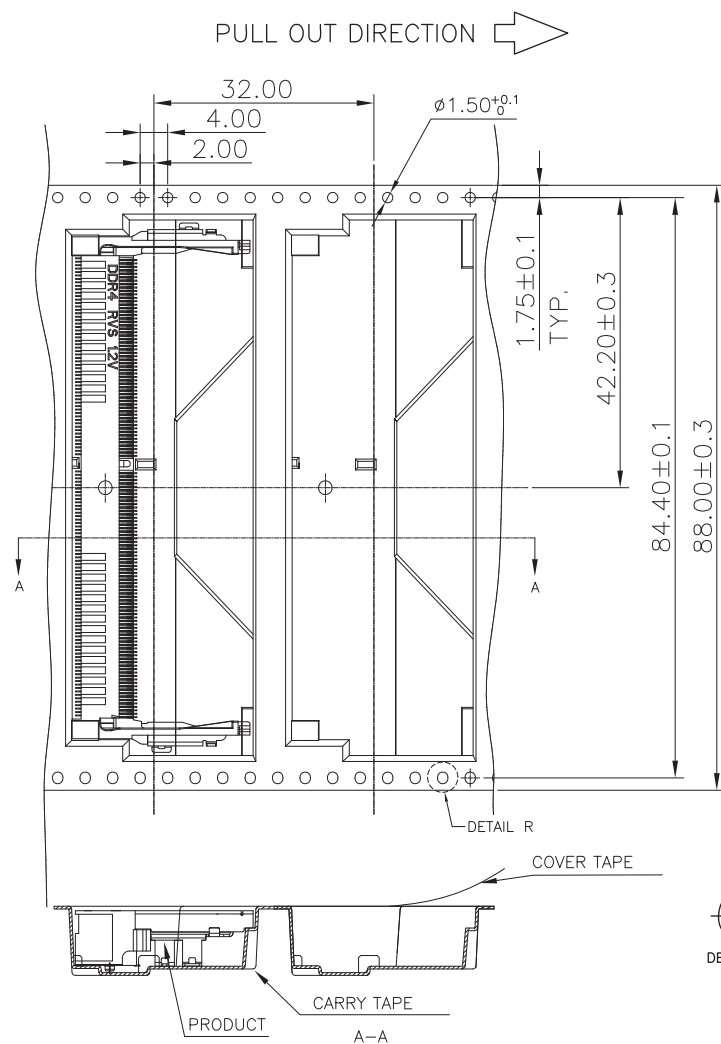

SMP TECHNOLOGY, INC.

DDR 4 SO DIMM Socket, 260 Position, 1.2Volt,
Reverse Orientation, 8.0mm Height, Type A