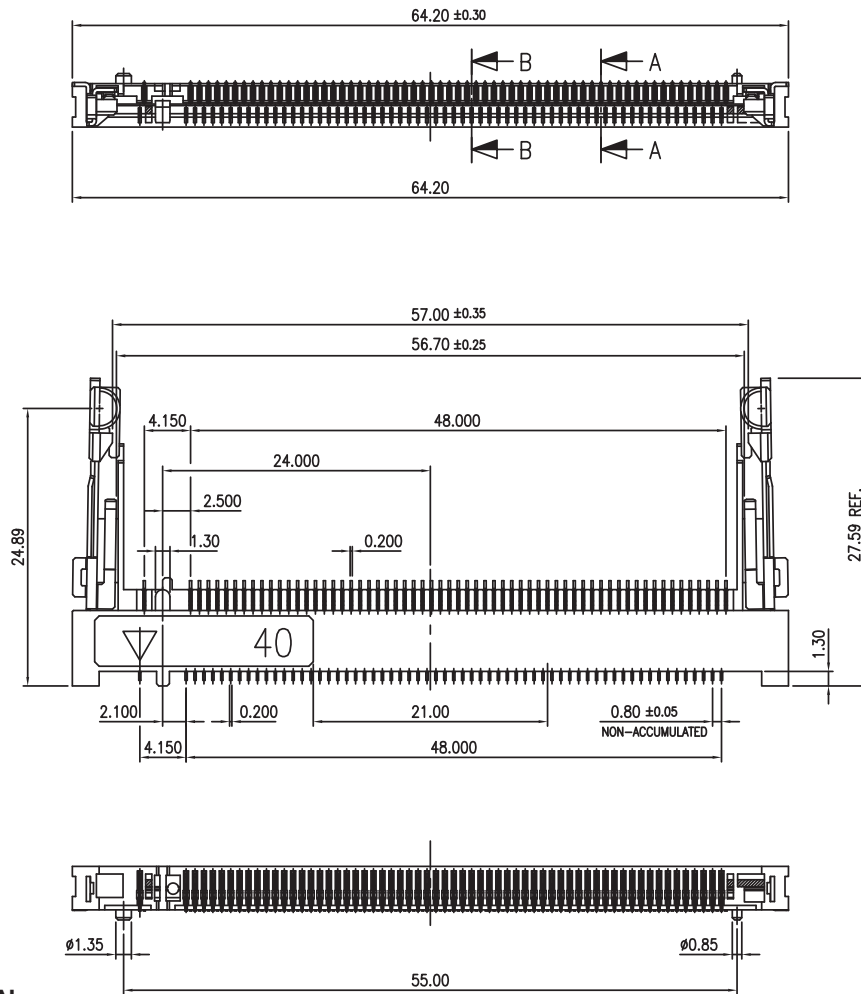


ELECTRICAL:

CURRENT: 0.5A

VOLTAGE RATING: 50V AC

OPERATING TEMPERATURE: -50° C TO +90° C

MATERIAL:

INSULATOR: LCP +30% GLASS REINFORCED (UL94V-0)

CONTACT: PHOSPHOR BRONZE, C5210R-SH

METAL: STAINLESS STEEL, JIS SUS304-3/4H

PLATING: SELECTIVE GOLD ON CONTACT AREA;

MATTE TIN (100u" min.) ON SOLDERING AREA.; 50u" NICKEL UNDER PLATE

HOW TO ORDER:

NUMBER OF POSITIONS
124

HEIGHT:
1 - 4.00mm



COLOR:
0 - Beige
1 - Black
LATCH:
0 - Plastic Latch

PACKAGING:
0 - Tray
1 - Tape & Reel



SELECTIVE PLATING:
1 - 5u" Au
2 - 10u" Au
4 - 15u" Au
5 - 30u" Au

RoHS COMPLIANT:

Rev	Drawn	Checked	Approved	Date	
0	S.E.	S.M.	S.M.	10/1/01	SMP TECHNOLOGY, INC.
A	G.T.	S.M.	S.M.	11/21/05	Mini PCI, Fax Modem Socket, 124 Position, Right Angle
B	B.S.	S.M.	S.M.	1/15/07	
C	B.S.	S.M.	S.M.	1/08/08	
D	B.S.	S.M.	S.M.	04/07/09	Surface Mount, 4.00mm Height, Plastic Latch
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm					P/N: B031-110X-0XX-Z

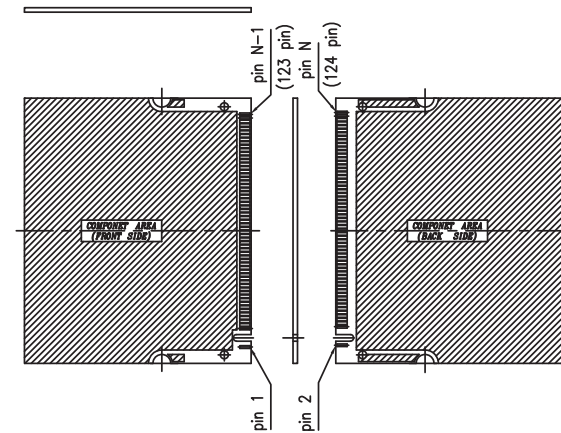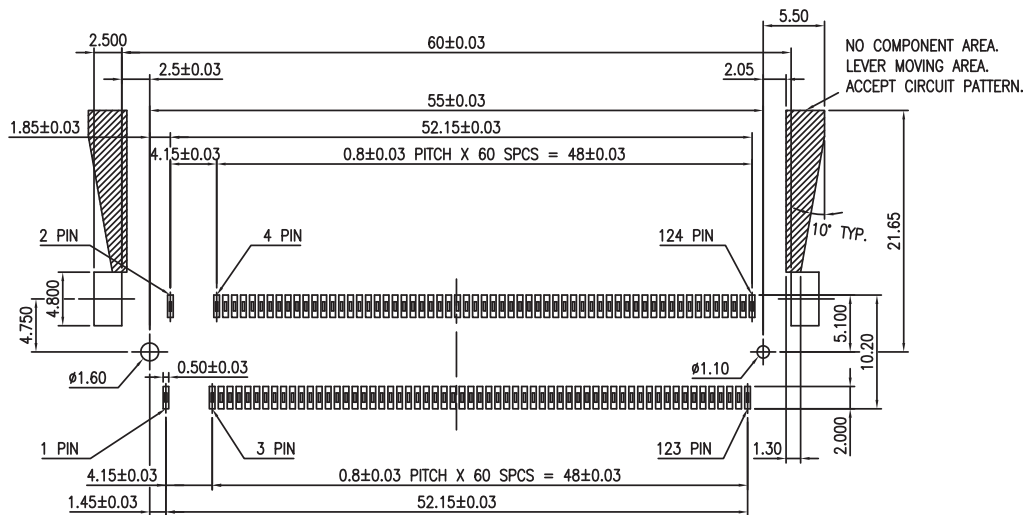



CIRCUIT POSITION OF S.O.DIMM

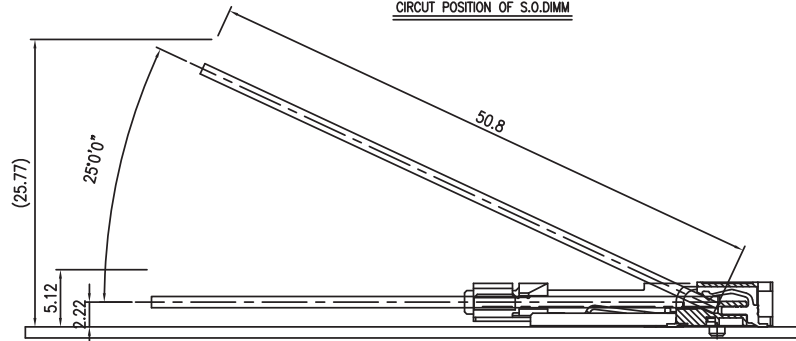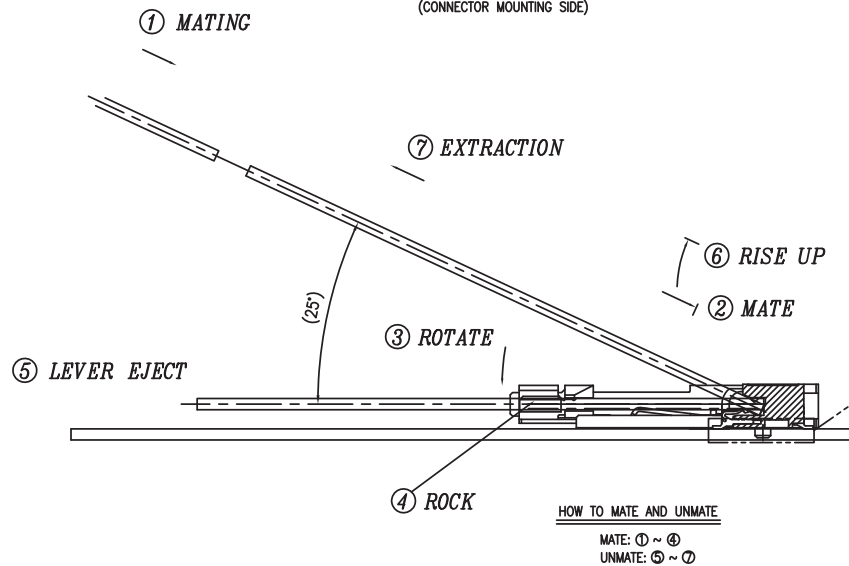

EJECT HEIGHT

SOLDER LEADS.
SOLDERLEAD AND CONTACT
MUST BE FEET COPLANARITY
WITHIN 0.10 mm.

					SMP TECHNOLOGY, INC.
					Mini PCI, Fax Modem Socket, 124 Position, Right Angle
					Surface Mount, 4.00mm Height, Plastic Latch
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm
					P/N: B031-110X-0XX-Z
					Pg: 2/3

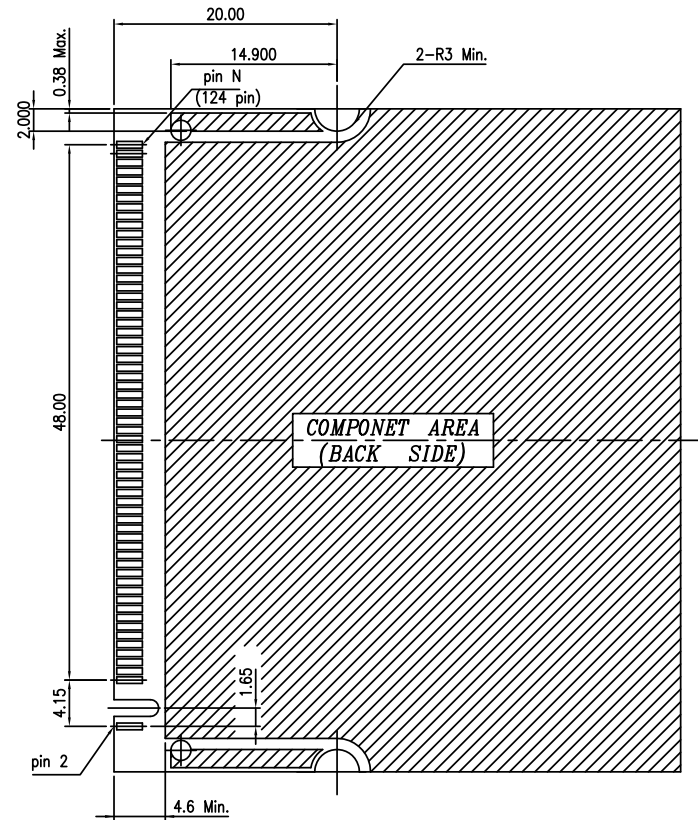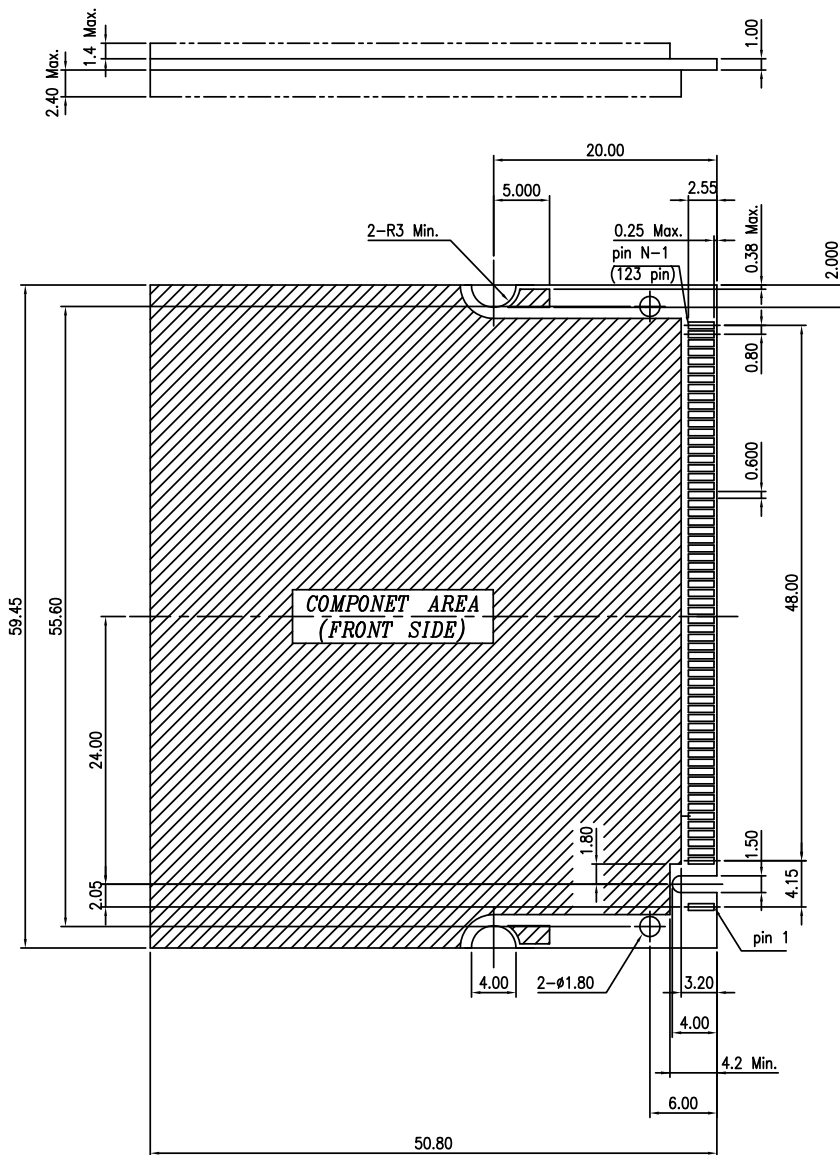

					SMP TECHNOLOGY, INC.	
					Mini PCI, Fax Modem Socket, 124 Position, Right Angle	
					Surface Mount, 4.00mm Height, Plastic Latch	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	P/N: B031-110X-0XX-Z
						Pg: 3/3