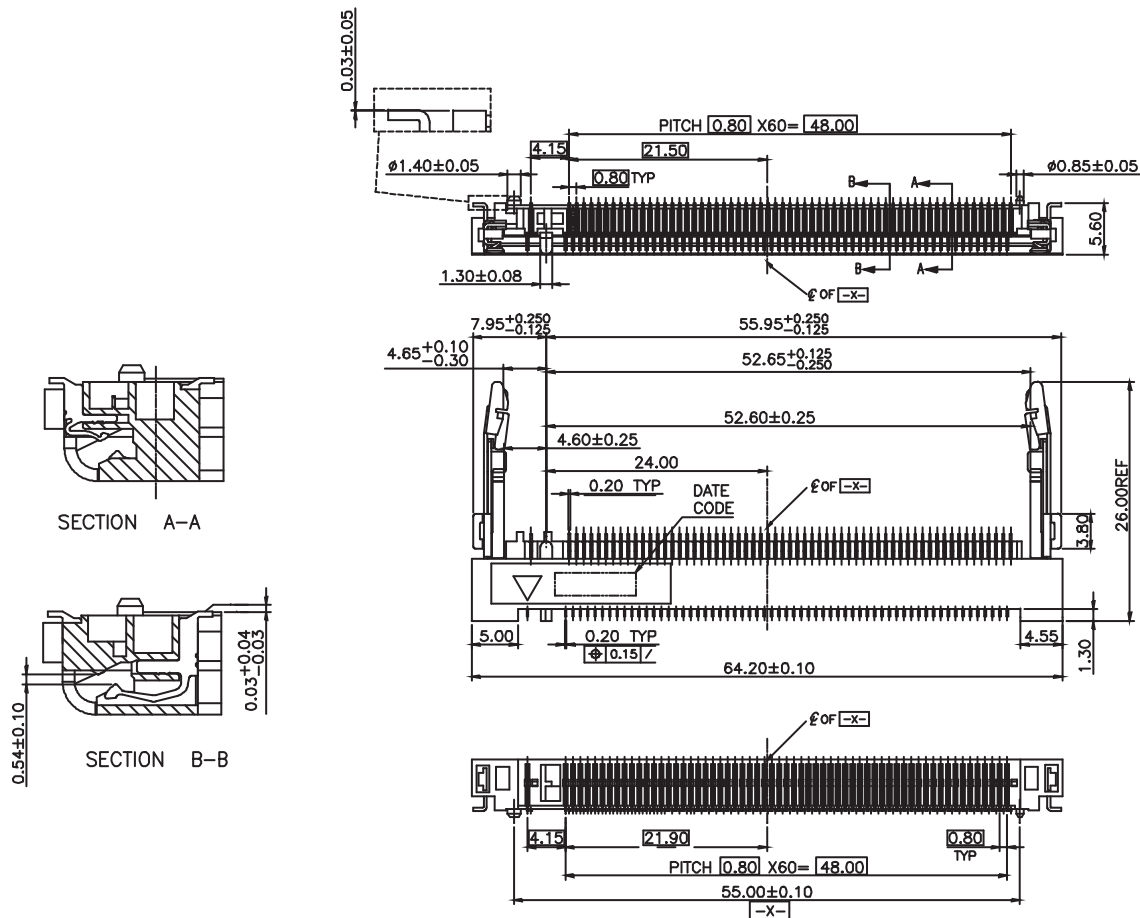


ELECTRICAL:

CURRENT: 0.3A
VOLTAGE RATING: 50V AC
OPERATING TEMPERATURE: - 40° C TO +90° C
STORAGE TEMPERATURE: - 40° C TO +90° C


MATERIAL:

INSULATOR: LCP +30% GLASS REINFORCED (UL94V-0)
CONTACT: PHOSPHOR BRONZE, C5210R-SH
METAL: STAINLESS STEEL, JIS SUS304-3/4H
PLATING: SELECTIVE GOLD ON CONTACT AREA;
MATTE TIN (100u" min.) ON SOLDERING AREA.; 50u" NICKEL UNDER PLATE

HOW TO ORDER:

NUMBER OF POSITIONS: 124
HEIGHT: 3 - 5.6mm
COLOR: 1 - Black
PACKAGING: 0 - Tray
1 - Tape & Reel
LATCH: 1 - Metal Latch
SELECTIVE PLATING: 1 - 5u" Au
2 - 10u" Au
4 - 15u" Au
5 - 30u" Au
RoHS COMPLIANT:

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	10/15/09	
A	B.S.	S.M.	S.M.	12/10/15	Mini PCI, Fax Modem Socket, 124 Position, Right Angle
					Surface Mount, 5.6mm Height, Metal Latch
TOL. DEC. .X +/- 0.25 .XX +/- 0.20 .XXX +/-					P/N: B031-1311-0XX-Z
ANGLE +/- 5° UNIT: mm					Pg: 1/2

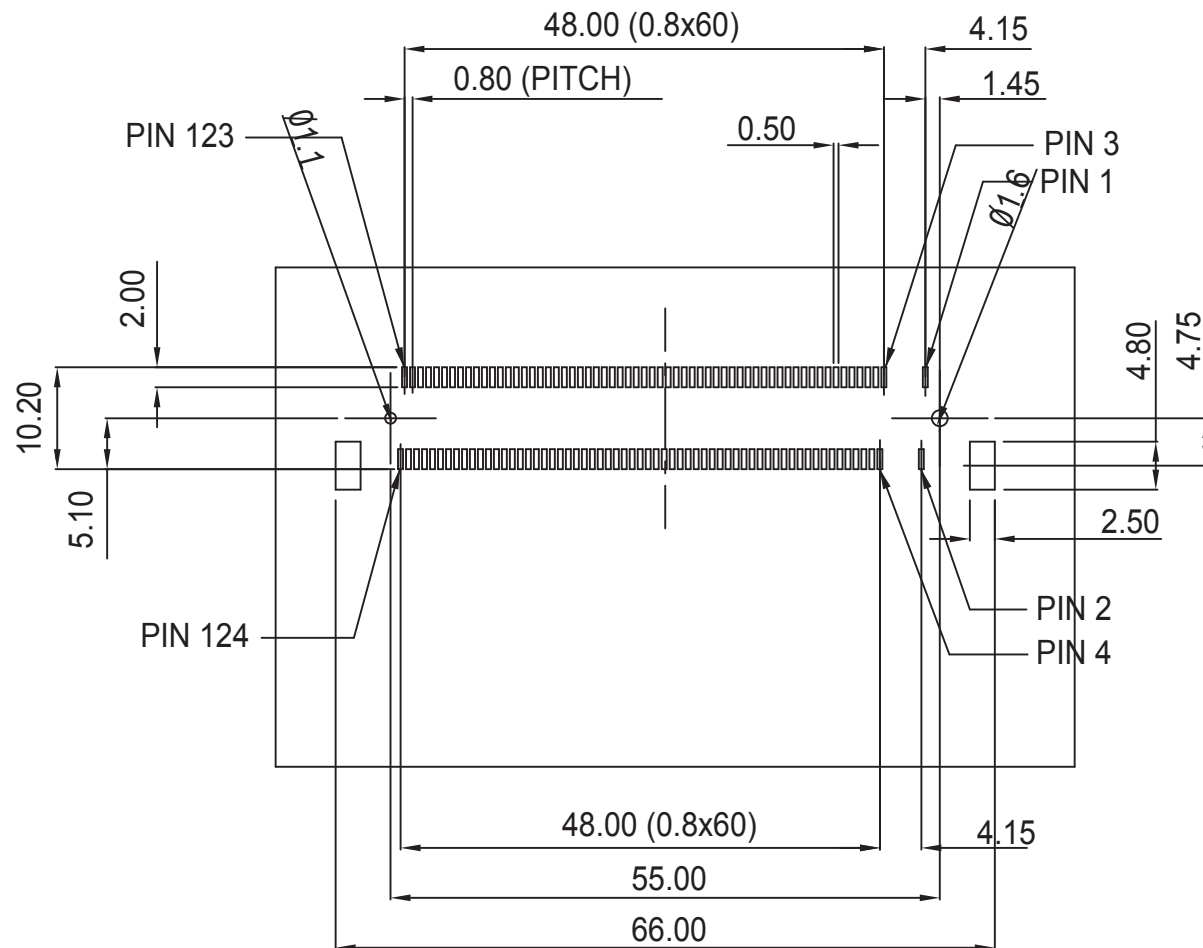

Recommended PC Board Layout

					SMP TECHNOLOGY, INC.
					Mini PCI, Fax Modem Socket, 124 Position, Right Angle
					Surface Mount, 5.6mm Height, Metal Latch
TOL. DEC.	.X +/-	.XX +/-	.XXX +/-	ANGLE +/-	UNIT: mm
					P/N: B031-1311-0XX-Z
					Pg: 2/2