
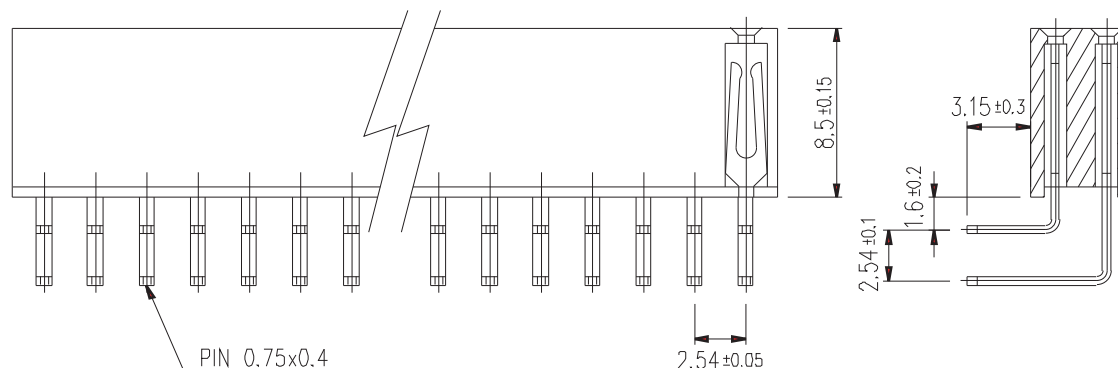
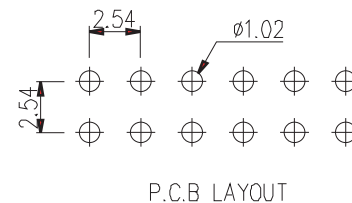


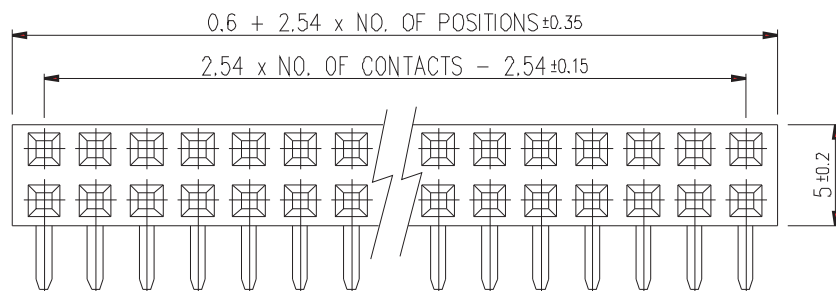

HOW TO ORDER:

B 0 6 1 - X X 2 2 - 2 0 X - Z

NUMBER OF CONTACTS:
04 thru 80

DEFINITION:
2 - RIGHT ANGLE

NUMBER OF ROWS:
1 - ONE
2 - TWO

HOUSING DIMENSIONS:
Height - 8.50mm
Contact Tail - 3.15mm

CONTACT STYLE:
2 - TUNING FORK

PLATING OVERALL: **RoHS COMPLIANT**

0 - FULL TIN
1 - FULL Au
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

SELECTIVE PLATING:
6 - Au CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

ELECTRICAL:

CURRENT: 3A
CONTACT RESISTANCE: 20mΩ Max.
INSULATOR RESISTANCE: 5000MΩ Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER (UL94V-0)
CONTACT: PHOSPHOR BRONZE
CONTACT PLATING: GOLD and/or TIN OVER 50 MICROINCHES
NICKEL SUBPLATE

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	A.M.	S.M.	S.M.	08/25/03		
A	A.M.	S.M.	S.M.	02/14/05	Receptacle Assembly, 2.54mm Pitch, Side Entry, Double Row, Straight	
B	B.S.	S.M.	S.M.	12/15/06	Tuning Fork Contact, 5.7mm Height, 5.00mm Width, Thru Hole	
SCALE:n/a					SERIES: B061	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/- 5°	UNIT: mm	Pg: 1