




P.C.B. LAYOUT

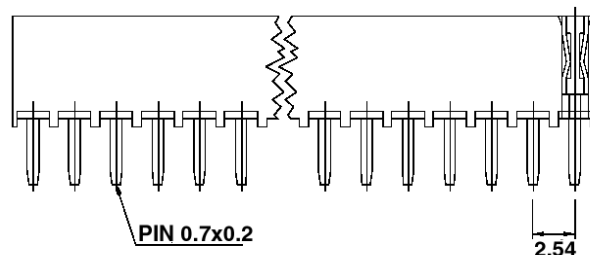

DIMENSION(mm)

DIMENSION NUMBER	A	B	C
1	5.00	2.54	3.00
2	7.10	2.50	3.00
3	8.50	3.00	3.50
4	6.80	3.50	3.35

HOW TO ORDER:

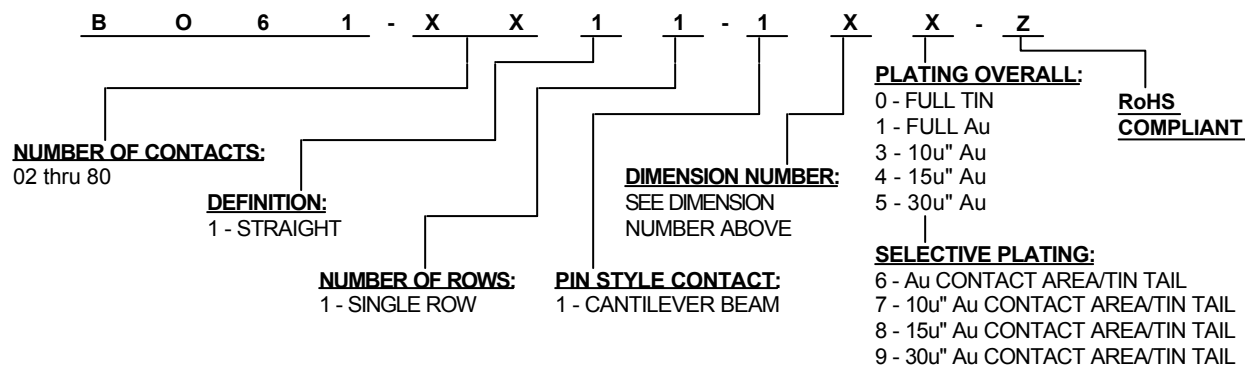

ELECTRICAL:

CURRENT RATING: 3A

CONTACT RESISTANCE: < 20m Ω

INSULATOR RESISTANCE: > 1000M Ω

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MIN.

OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

CONTACT: PHOSPHOR BRONZE

INSULATOR: GLASS FILLED POLYESTER, UL94V-0

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	S.E.	S.M.	S.M.	10/1/97	
A	Added Single Row; 6.88 Insulator Height	A.M.	S.M.	S.M.	04/4/02	
B	Revised for RoHS Compliance	B.S.	S.M.	S.M.	08/06/08	
						RECEPTACLE ASSEMBLY, 2.54mm PITCH
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm						SERIES: B061
						Pg: 1