

DIMENSION(mm)

DIMENSION NUMBER	A	B	C
4	5.70	2.40	2.80
5	8.50	2.40	3.20
6	5.70	2.40	3.30

ELECTRICAL:

CURRENT RATING: 3A

CONTACT RESISTANCE: < 20m Ω

INSULATOR RESISTANCE: > 1000M Ω

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MIN.


OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

CONTACT: PHOSPHOR BRONZE

INSULATOR: GLASS FILLED POLYESTER, UL94V-0

HOW TO ORDER:

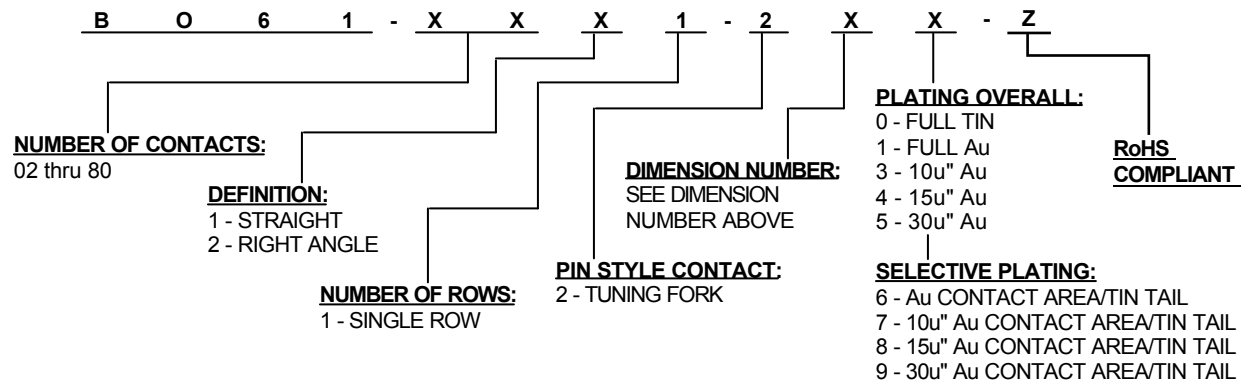

Rev	Drawn	Checked	Approved	Date
0	S.E.	S.M.	S.M.	10/01/97
A	B.S.	S.M.	S.M.	08/06/08

SMP TECHNOLOGY, INC.

RECEPTACLE ASSEMBLY, 2.54mm PITCH

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

SERIES: B061

Pg: 1