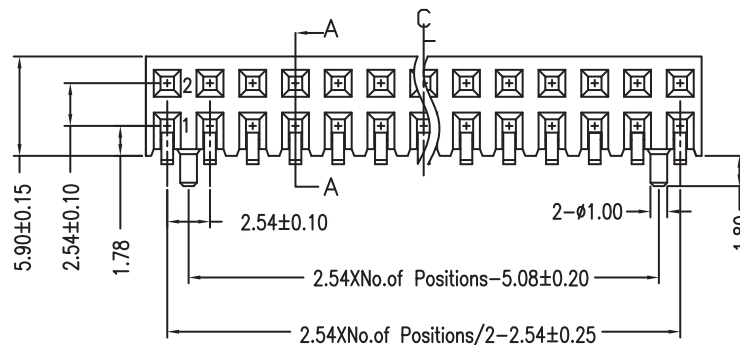
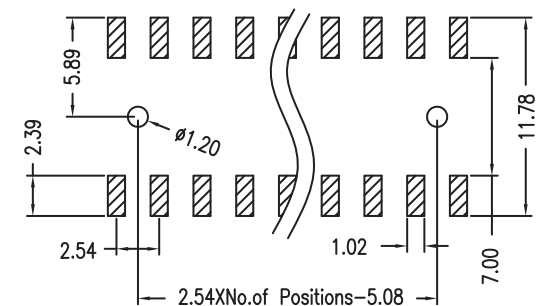
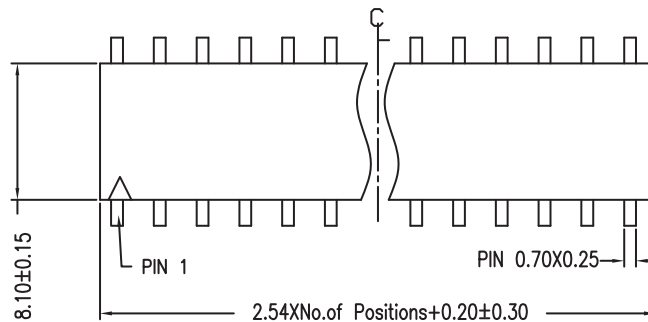


HOW TO ORDER:

B		0		6		2		-		X		X		1		2		-		4		3		X		-		Z		X	
NUMBER OF CONTACTS:														PLATING OVERALL:														PACKAGING:			
03 thru 40														0 - FULL TIN														Blank - Tube			
														1 - FULL Au FLASH														1 - Tape / Reel			
														3 - 10u" Au														2 - Tray			
														4 - 15u" Au														T1 - Tube w/cap			
														5 - 30u" Au														T2 - Tape/ Reel w/cap			
																												T3 - Tray w/cap			
														SELECTIVE PLATING:																	
														6 - Au FLASH CONTACT AREA/TIN TAIL																	
														7 - 10u" Au CONTACT AREA/TIN TAIL																	
														8 - 15u" Au CONTACT AREA/TIN TAIL																	
														9 - 30u" Au CONTACT AREA/TIN TAIL																	

ELECTRICAL:

CURRENT: 3A
 CONTACT RESISTANCE: 20mΩ Max.
 INSULATOR RESISTANCE: 5000MΩ Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
 OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: HIGH TEMPERATURE PLASTIC (UL94V-0)
 CONTACT: PHOSPHOR BRONZE

DEFINITION:

1 - Surface Mount
 (Horizontal Entry)

NUMBER OF ROWS:

2 - Double Row

HEIGHT:

4 - 5.90mm

MOUNTING PEG OPTION:

3 - With mounting Peg

RoHS

COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	01/15/14	
						Receptacle Assembly, 2.54mm Pitch, Double Row, Top entry
						Surface Mount, 5.90mm Height, With Mounting Peg
TOL. DEC.	.X +/- 0.40	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/- 3°	UNIT: mm	P/N: B062-XX12-43X-ZX