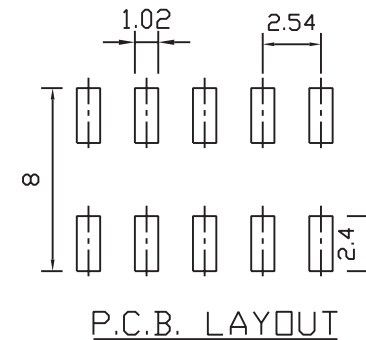
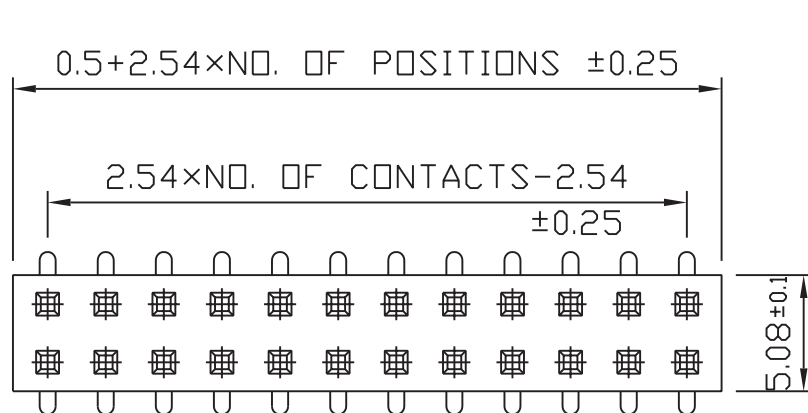


HOW TO ORDER:

NUMBER OF CONTACTS:
B 0 6 2 - X X 3
04 thru 80

DEFINITION:
3 - SURFACE MOUNT
(TOP ENTRY)

HEIGHT:
2 - 0
0 - 4.5mm

MOUNTING PEG OPTION:
0 - w/OUT MOUNTING PEG

NUMBER OF ROWS:
2 - DOUBLE ROW

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au FLASH
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

**RoHS
COMPLIANT**

PACKAGING:

Blank - Tube
1 - Tape / Reel
2 - Tray
T1 - Tube w/cap
T2 - Tape/ Reel w/cap
T3 - Tray w/cap

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

ELECTRICAL:

CURRENT: 3A
CONTACT RESISTANCE: 20mΩ Max.
INSULATOR RESISTANCE: 5000MΩ Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: HIGH TEMPERATURE PLASTIC (UL94V-0)
CONTACT: PHOSPHOR BRONZE

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	A.M.	S.M.	S.M.	09/18/03		
0	Revised for RoHS Compliance	B.S.	S.M.	S.M.	2/22/07	Receptacle Assembly, 2.54mm Pitch, Single Row, Top entry	
						Surface Mount, 4.5mm Height, No Mounting Peg	
SCALE:n/a						P/N: B062-XX32-00X-Z	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	Pg: 1	