


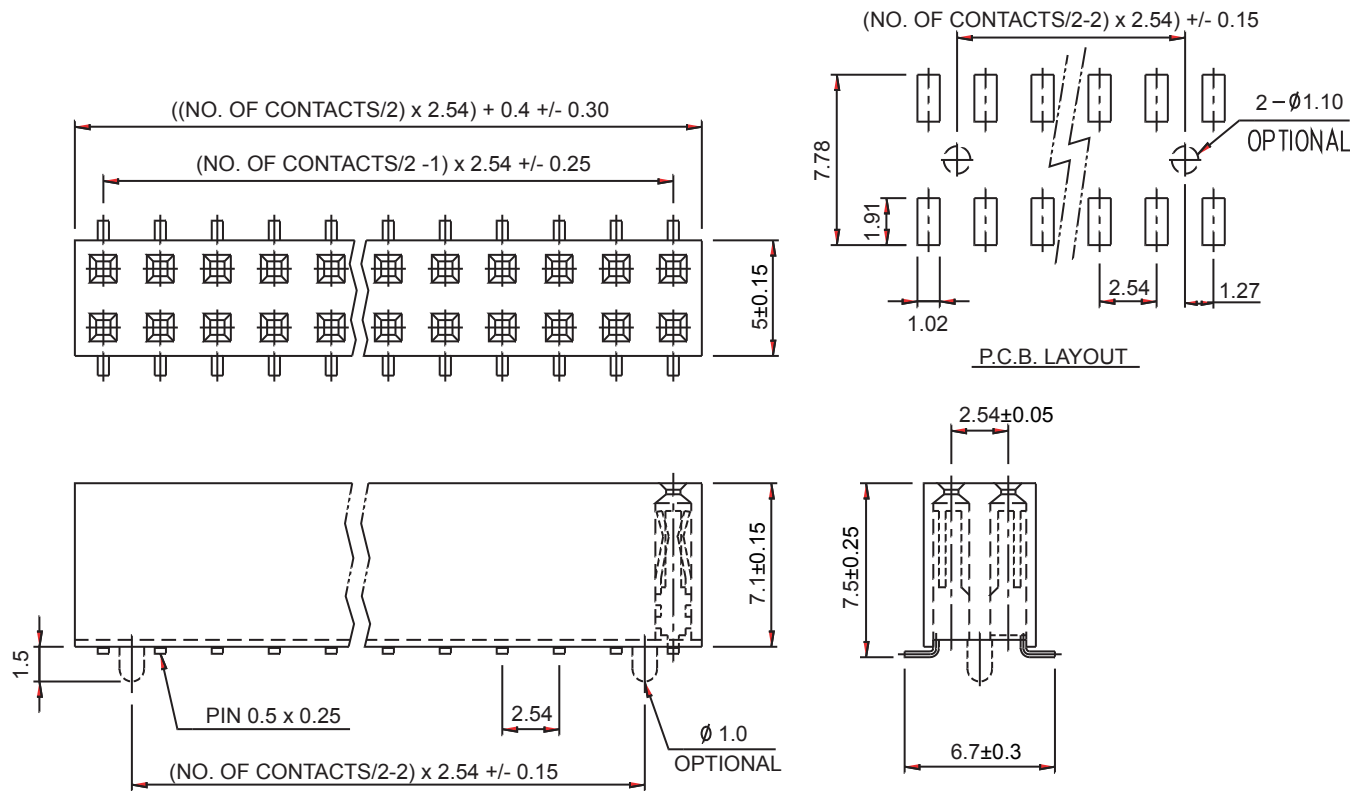

HOW TO ORDER:

B 0 6 2 - X X 3 2 - 1 X X - Z									
NUMBER OF CONTACTS: 04 thru 80				DEFINITION: 3 - SURFACE MOUNT (TOP ENTRY)		HEIGHT: 1 - 7.1mm		PLATING OVERALL: 0 - FULL TIN 1 - FULL Au FLASH 3 - 10u" Au 4 - 15u" Au 5 - 30u" Au	
				NUMBER OF ROWS: 2 - DOUBLE ROW		MOUNTING PEG OPTION: 0 - w/OUT MOUNTING PEG 3 - w/MOUNTING PEG		SELECTIVE PLATING: 6 - Au FLASH CONTACT AREA/TIN TAIL 7 - 10u" Au CONTACT AREA/TIN TAIL 8 - 15u" Au CONTACT AREA/TIN TAIL 9 - 30u" Au CONTACT AREA/TIN TAIL	
								PACKAGING: Blank - Tube 1 - Tape / Reel 2 - Tray T1 - Tube w/cap T2- Tape/ Reel w/cap T3 - Tray w/cap	

ELECTRICAL:

CURRENT: 3A
CONTACT RESISTANCE: 20mΩ Max.
INSULATOR RESISTANCE: 5000MΩ Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: HIGH TEMPERATURE PLASTIC (UL94V-0)
CONTACT: PHOSPHOR BRONZE

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.				
0	Issued	A.M.	S.M.	S.M.					
0	Revised for RoHS Compliance	B.S.	S.M.	S.M.	Receptacle Assembly, 2.54mm Pitch, Double Row, Top entry				
SCALE: n/a					Surface Mount, 7.1mm Height, Mounting Peg (optional)				
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	P/N: B062-XX32-1XX- Z			