

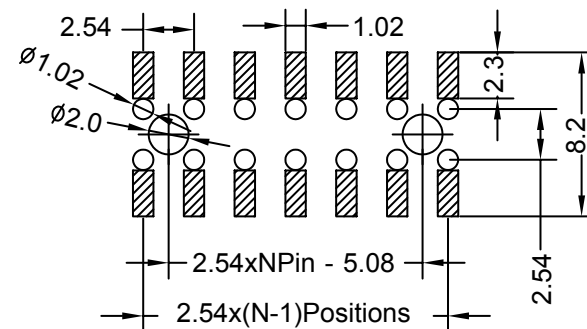
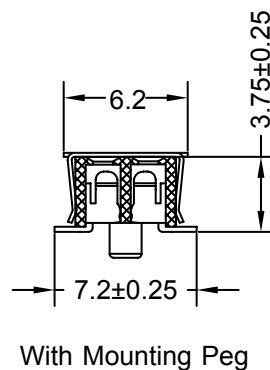
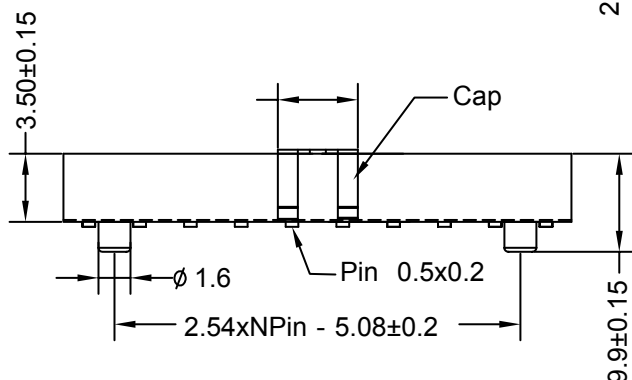


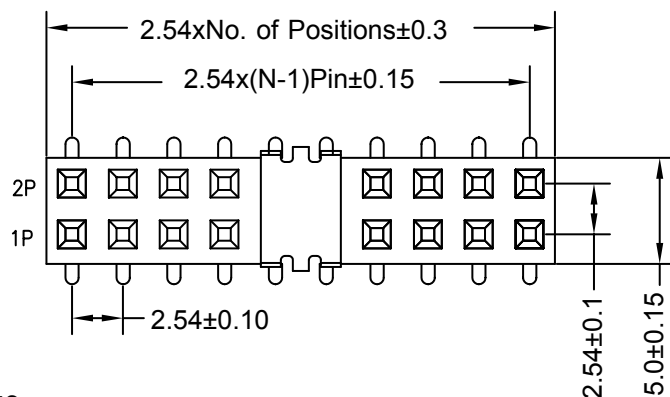


RECOMMENDED PCB LAYOUT



Without Mounting Peg

HOW TO ORDER:

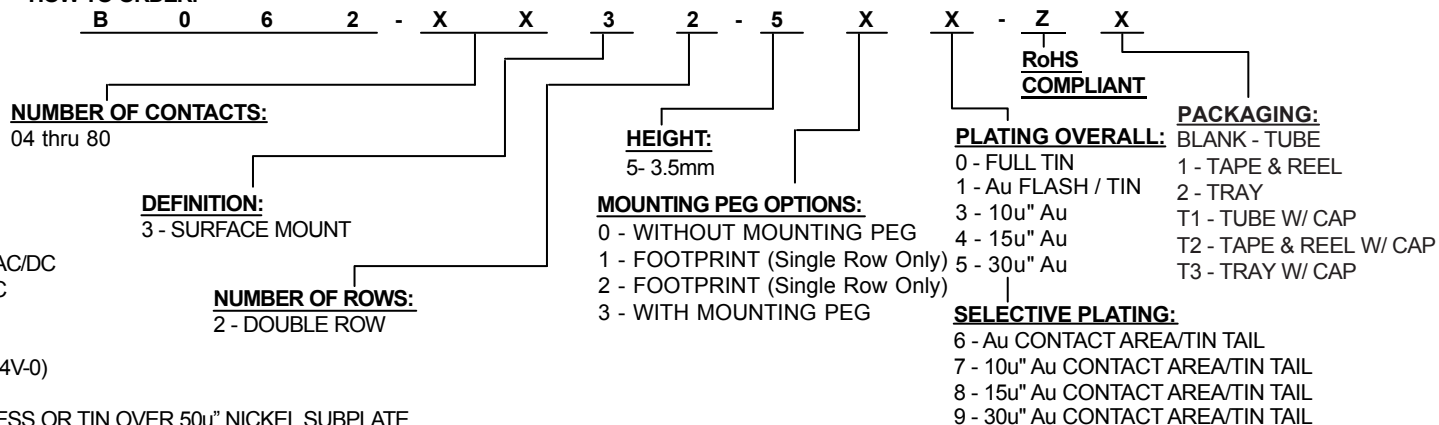

ELECTRICAL:

CURRENT: 3A
CONTACT RESISTANCE: 20 mOhms Max.
INSULATOR RESISTANCE: 1000 MOhms Min.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/DC
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER (UL94V-0)
CONTACT: COPPER ALLOY
CONTACT PLATING: SPECIFIED GOLD THICKNESS OR TIN OVER 50u" NICKEL SUBPLATE

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	08/10/17	
SCALE:n/a					Receptacle Assembly, 2.54mm Pitch, Top Entry, Double Row, Straight,
					With or Without Mounting Peg, 3.5mm Height
TOL. DEC.	.X +/- 0.30	.XX +/- 0.20	.XXX +/- 0.10	ANGLE +/- 5°	UNIT: mm
SERIES: B062-XX32-5XX-ZX					Pg: 1