

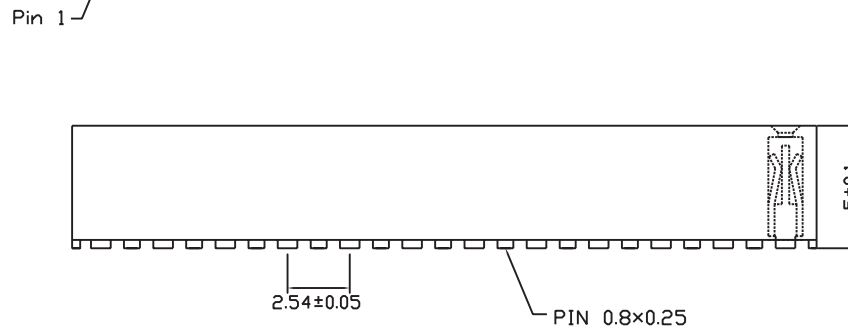
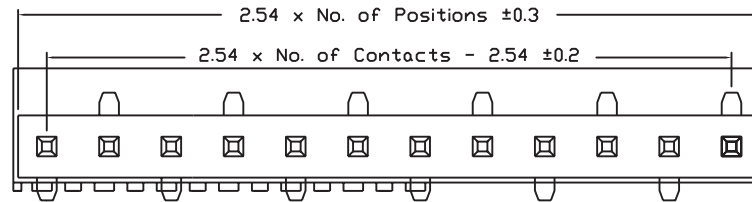
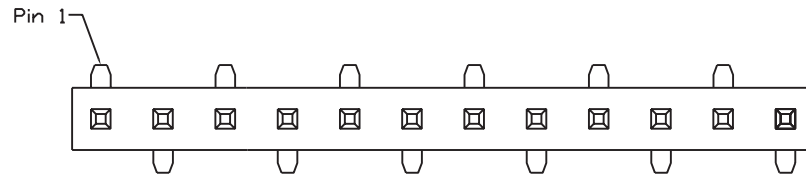



FOOTPRINT TYPE 1



FOOTPRINT TYPE 2



HOW TO ORDER:

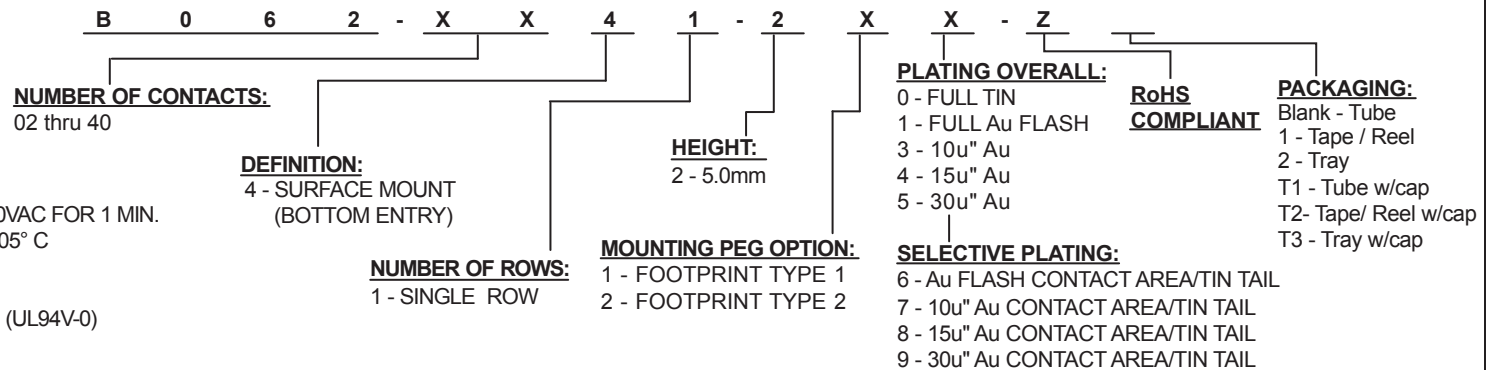

ELECTRICAL:

CURRENT: 3A
 CONTACT RESISTANCE: 20mΩ Max.
 INSULATOR RESISTANCE: 5000MΩ Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
 OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: HIGH TEMPERATURE PLASTIC (UL94V-0)
 CONTACT: PHOSPHOR BRONZE

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	A.M.	S.M.	S.M.	09/18/03		
0	Revised for RoHS Compliance	B.S.	S.M.	S.M.	2/22/07	Receptacle Assembly, 2.54mm Pitch, Single Row, Bottom entry	
						Surface Mount, 5.0mm Height, No Mounting Peg	
SCALE:n/a						P/N: B062-XX41-2XX-Z	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	Pg: 1	