

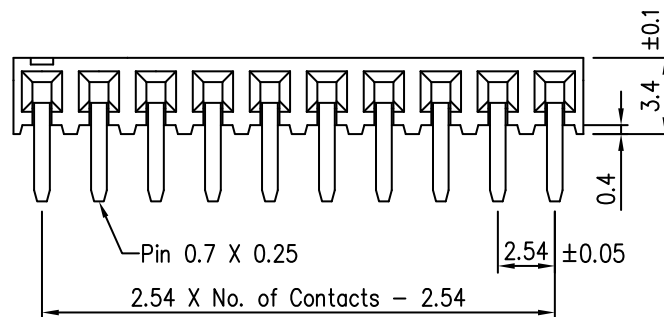


Recommended
P.C. Board Hole Layout



HOW TO ORDER:

B 0 6 3 - X X 1 1 - 1 0 X - Z

NUMBER OF CONTACTS:
04 thru 40

DEFINITION:
1 - STRAIGHT

NUMBER OF ROWS:
1 - SINGLE ROW

PIN STYLE CONTACT:
1 - CANTILEVER BEAM

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

RoHS COMPLIANT

SELECTIVE PLATING:

6 - Au CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

ELECTRICAL:

CURRENT: 3A
CONTACT RESISTANCE: < 20mΩ
INSULATOR RESISTANCE: > 1000MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER (UL94V-0)
CONTACT: PHOSPHOR BRONZE

Rev		Drawn	Checked	Approved	Date
0	Issued	S.E.	S.M.	S.M.	2/1/96
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	12/15/06

SCALE	MAT'L	FINISH
-------	-------	--------

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.

RECEPTACLE ASSEMBLY, 2.54mm Pitch, SIDE ENTRY, SINGLE ROW

SERIES: B063

Pg: 1