

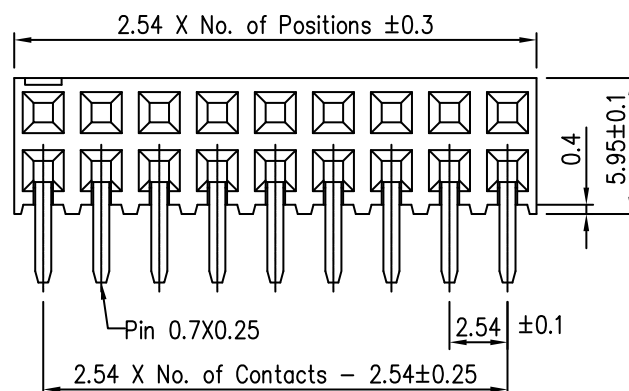


Recommended
P.C. Board Hole Layout



HOW TO ORDER:

B O 6 3 - X X 1 2 - 1 0 X - Z

NUMBER OF CONTACTS:

08 thru 80

DEFINITION:

1 - STRAIGHT

NUMBER OF ROWS:

2 - DOUBLE ROW

PIN STYLE CONTACT:

1 - CANTILEVER BEAM

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

RoHS COMPLIANT

SELECTIVE PLATING:

6 - Au CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

ELECTRICAL:

CURRENT: 3A
CONTACT RESISTANCE: < 20m Ω
INSULATOR RESISTANCE: > 1000M Ω
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER (UL94V-0)
CONTACT: PHOSPHOR BRONZE

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	S.E.	S.M.	S.M.	2/1/96	
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	12/15/06	
SCALE MAT'L FINISH						RECEPTACLE ASSEMBLY, 2.54mm Pitch, SIDE ENTRY, DOUBLE ROW
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	SERIES: B063