
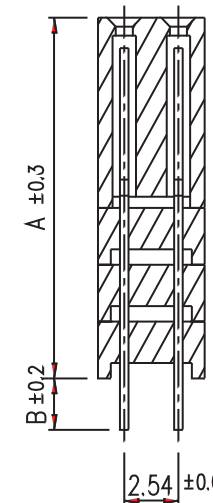


P.C.B LAYOUT

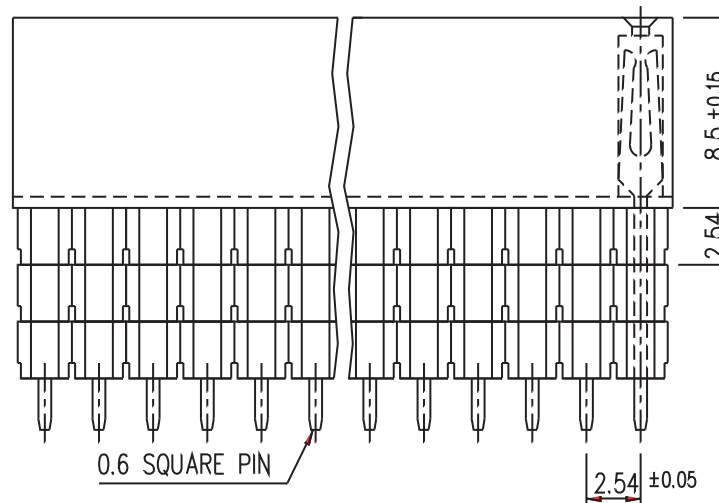

NOTE:
4 STACK PART SHOWN

DIMENSION(mm)

DIMENSION NUMBER	A	B	NUMBER OF STACKS
1	11.05	2.30	1
2	11.05	7.35	1
3	11.05	12.20	1
4	13.59	4.85	2
5	13.59	9.65	2
6	16.13	2.30	3
7	16.13	7.10	3
8	18.67	4.60	4
9	11.05	2.90	1
A	16.13	3.50	3

ELECTRICAL:

CURRENT RATING: 3A
CONTACT RESISTANCE: $< 20\text{m } \Omega$
INSULATOR RESISTANCE: $> 1000\text{M } \Omega$
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MIN.
OPERATING TEMPERATURE: -40°C TO $+105^{\circ}\text{C}$

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER, UL94V-0
CONTACT: PHOSPHOR BRONZE

HOW TO ORDER:

B 0 6 5 - 0 X X 2 - X X X - Z

NUMBER OF CONTACTS:
006 thru 080

NUMBER OF ROWS:
2 - DOUBLE ROW

DIMENSION NUMBER:
SEE DIMENSION
NUMBER TABLE

NUMBER OF STACKS:
0 - RIGHT ANGLE
1 - ONE
2 - TWO
3 - THREE
4 - FOUR

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au FLASH
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

RoHS
COMPLIANT

Rev	Drawn	Checked	Approved	Date
0	Issued	A.M.	S.M.	11/04/03
A	Revised for RoHS Compliance	B.S.	S.M.	8/9/07
SCALE	MAT'L	FINISH		
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.

Elevated Stacked Receptacle Assembly, 2.54mm Pitch, Double Row

Thru Hole, Top Entry (11.05mm - 18.67mm Stacking Height)

P/N: B065-0XX2-XXX-Z

Pg: 1