


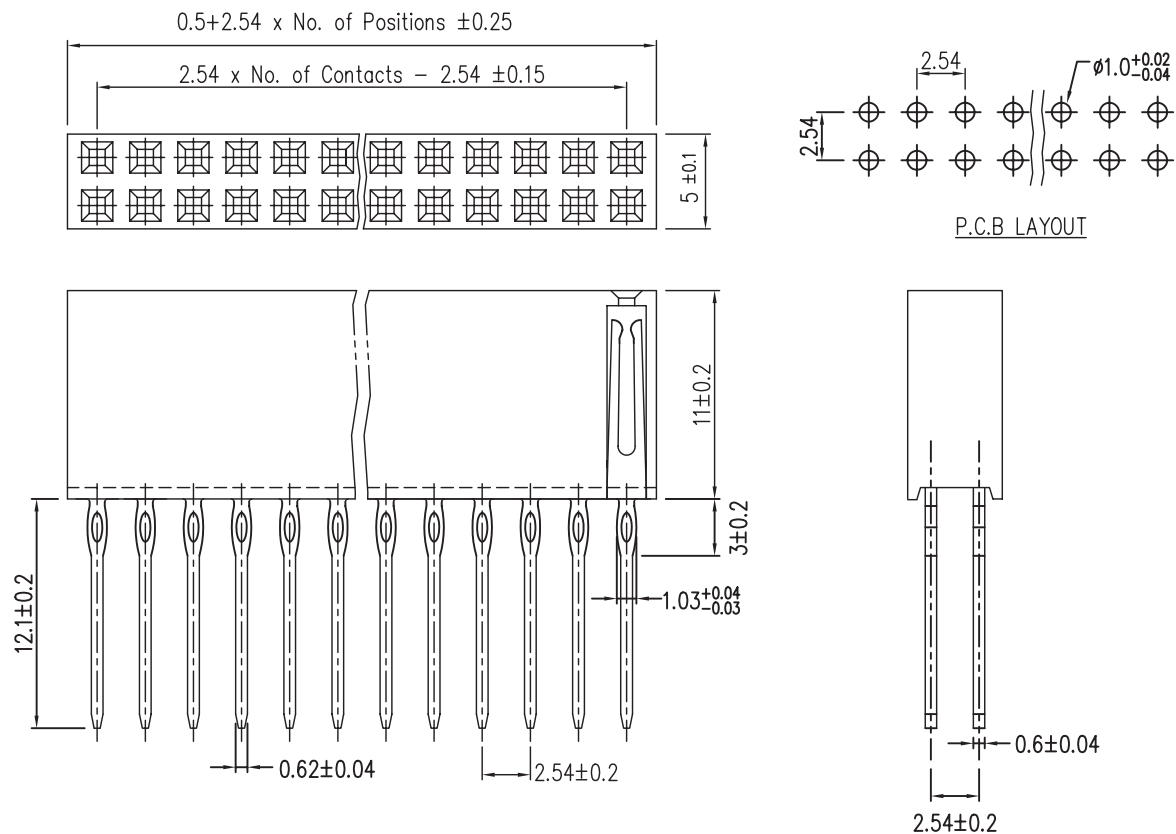

HOW TO ORDER:

B 0 6 5 - X X X 5 - 1 3 X - Z

NUMBER OF CONTACTS:

DOUBLE 006 thru 080

NUMBER OF ROWS:

5 - DOUBLE ROW PRESS FIT

NUMBER OF STACKS:

0 - RIGHT ANGLE
1 - ONE
2 - TWO
3 - THREE
4 - FOUR

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au FLASH
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

**RoHS
COMPLIANT**

ELECTRICAL:

CURRENT RATING: 1A
CONTACT RESISTANCE: < 20m Ω
INSULATOR RESISTANCE: > 5000M Ω
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MIN.
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER, UL94V-0
STANDARD: Nylon-6T
CONTACT: PHOSPHOR BRONZE

Rev		Drawn	Checked	Approved	Date
0	Issued	A.M.	S.M.	S.M.	28/01/04
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	12/15/06

SCALE:n/a

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.

Receptacle Assembly, 2.5mm Pitch, Double Row, Vertical, Press Fit

11.0mm Height, 12.0mm Tail, PC104 - Plus

P/N: B065-XXX5-13X-Z

Pg: 1