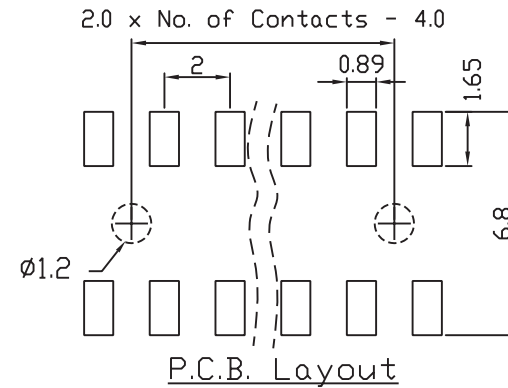
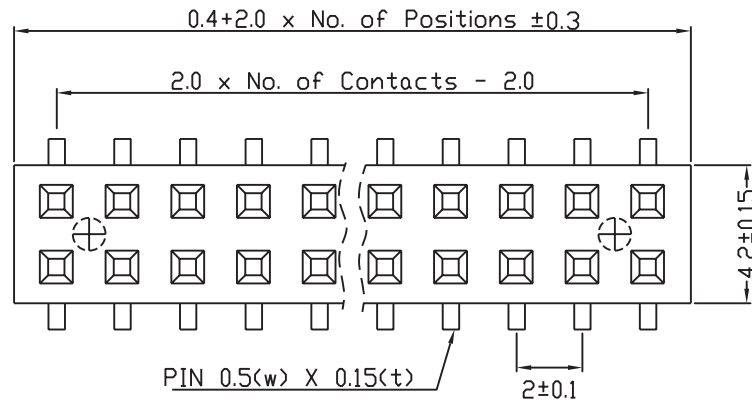


HOW TO ORDER:

B 0 6 7 - X X 2 2 - 3 0 X - Z

OF CONTACTS:

06 thru 80

CONTACT TAIL OPTIONS:

2 - SURFACE MOUNT w/POST

BODY HEIGHT:

3 - 2.7mm

HOUSING OPTION:

2 - DOUBLE ROW TOP ENTRY

PLATING OVERALL:

0 - FULL TIN

1 - FULL Au FLASH

3 - 10u" Au

4 - 15u" Au

5 - 30u" Au

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL

7 - 10u" Au CONTACT AREA/TIN TAIL

8 - 15u" Au CONTACT AREA/TIN TAIL

9 - 30u" Au CONTACT AREA/TIN TAIL

**RoHS
COMPLIANT**

ELECTRICAL:

CURRENT: 1A

CONTACT RESISTANCE: 20 milliohms Max.

INSULATOR RESISTANCE: 5000 Megohms Min.

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC For 1 MIN.

OPERATING TEMPERATURE: -40°C to +105°C

MAX PROCESSING TEMPERATURE: 230° For 30 ~ 60 Sec. (260° For 10 Sec.)

MATERIAL:

INSULATOR: Polyester, UL 94V-0 ; Nylon-6T

CONTACT: Phosphor Bronze

CONTACT PLATING: Full Gold, Full Tin, Selective Plating

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	08/08/03
A	B.S.	S.M.	S.M.	12/15/06

SCALE:n/a

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- 5° UNIT: mm

SMP TECHNOLOGY, INC.

Receptacle Assembly, 2.00mm Pitch, Double Row, Surface Mount

Top Entry, w/Mounting Post, 2.7mm Height

SERIES: B067

Pg: 1