

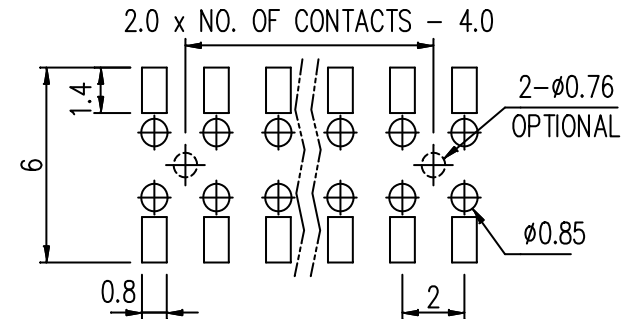
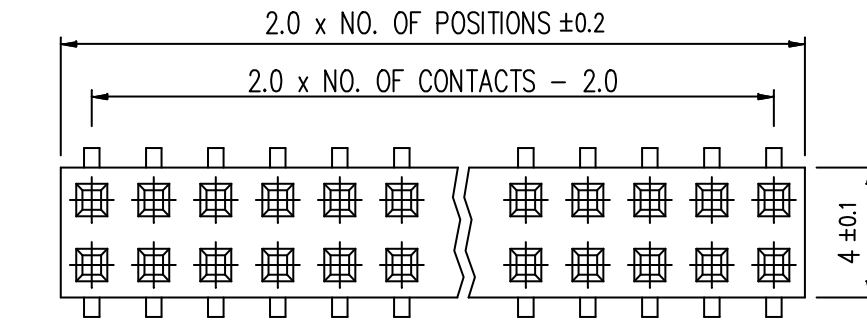


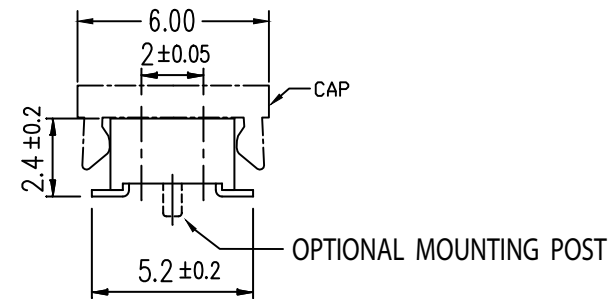

P.C.B LAYOUT

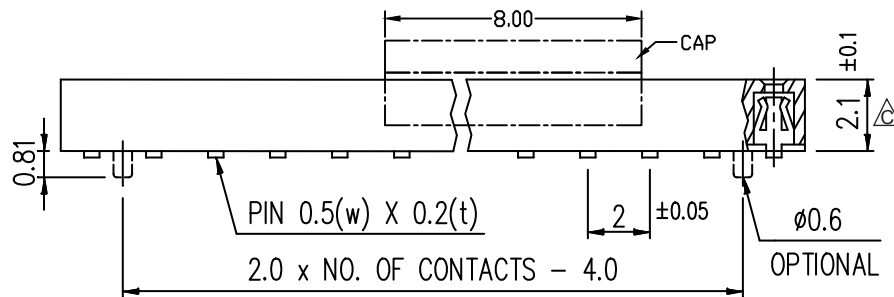

HOW TO ORDER:

B 0 6 7 - X X X 5 - 1 0 X X - Z

OF CONTACTS:
06 thru 60

CONTACT TAIL OPTIONS:
2 - SURFACE MOUNT w/POST
3 - SURFACE MOUNT w/OUT POST

BODY HEIGHT:
1 - 2.1mm

HOUSING OPTION:
5 - DOUBLE ROW
BOTTOM ENTRY

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au FLASH
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

PACKAGING:

0 - Tube
1 - Tube w/ Cap
2 - Tape & Reel w/ Cap

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

**RoHS
COMPLIANT**

ELECTRICAL:

CURRENT: 1A
CONTACT RESISTANCE: 20 milliohms Max.
INSULATOR RESISTANCE: 5000 Megohms Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC For 1 MIN.
OPERATING TEMPERATURE: -40°C to +105°C
MAX PROCESSING TEMPERATURE: 230° For 30 ~ 60 Sec. (260° For 10 Sec.)

MATERIAL:

INSULATOR: Polyester, UL 94V-0 ; Nylon-6T
CONTACT: Copper Alloy
CONTACT PLATING: Full or Selective Gold Plating Over 50u" Nickel Subplate

Rev	Drawn	Checked	Approved	Date	
0	A.M.	S.M.	S.M.	08/07/03	SMP TECHNOLOGY, INC.
A	B.S.	S.M.	S.M.	12/15/06	Receptacle Assembly, 2.00mm Pitch, Double Row, Surface Mount
B	B.S.	S.M.	S.M.	12/03/14	
C	B.S.	S.M.	S.M.	12/03/15	Bottom Entry, With or Without Mounting Post, 2.1mm Height
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- 5° UNIT: mm					SERIES: B067-XXX5-10XX-Z Pg: 1