

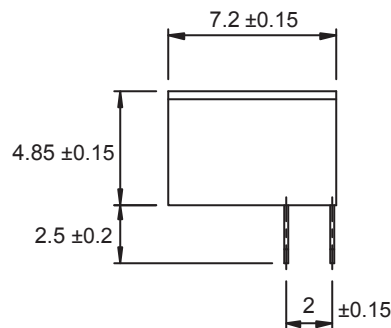


P.C.B. LAYOUT

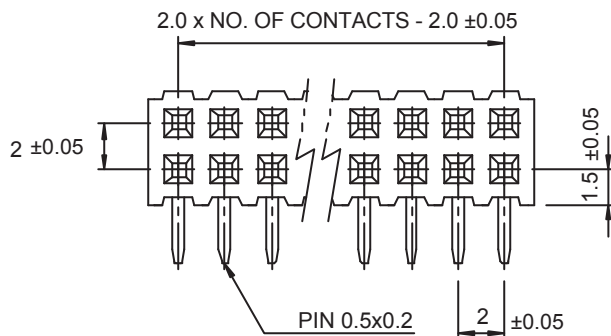

HOW TO ORDER:

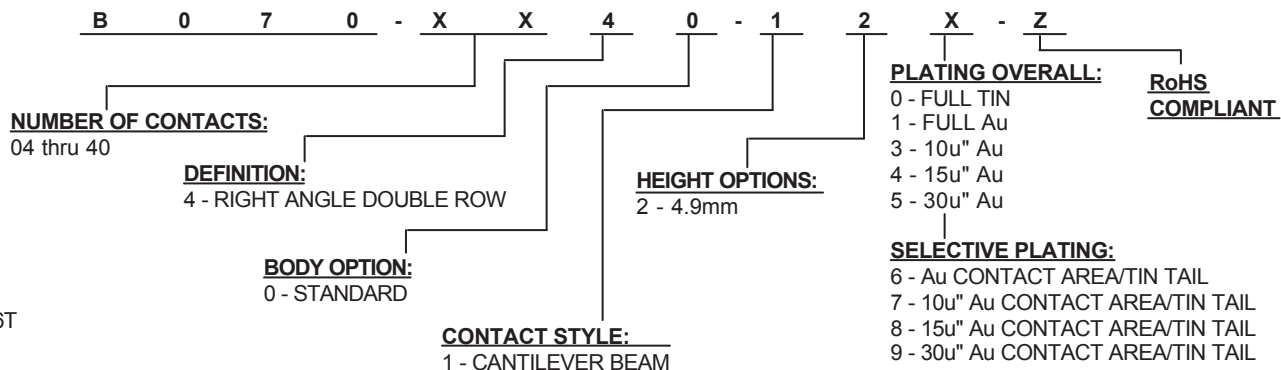

ELECTRICAL:

CURRENT: 1.5A
CONTACT RESISTANCE: 20 milliohms Max.
INSULATOR RESISTANCE: 5000 Megohms Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER (UL94V-0) ; NYLON 6T
CONTACT: COPPER ALLOY

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	A.M.	S.M.	07/24/03		
A	Revised for RoHS Compliance	B.S.	S.M.	2/22/07	Receptacle Assembly, 2.00mm Pitch, Double Row, Right Angle	
SCALE:n/a					Thru Hole, Cantilever Beam Contact	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/- 5°	UNIT: mm	SERIES: B070
						Pg: 1