




Recommended P.C.B Layout(Top Side)

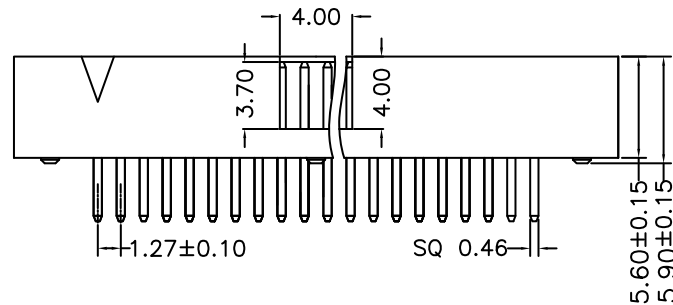

HOW TO ORDER:

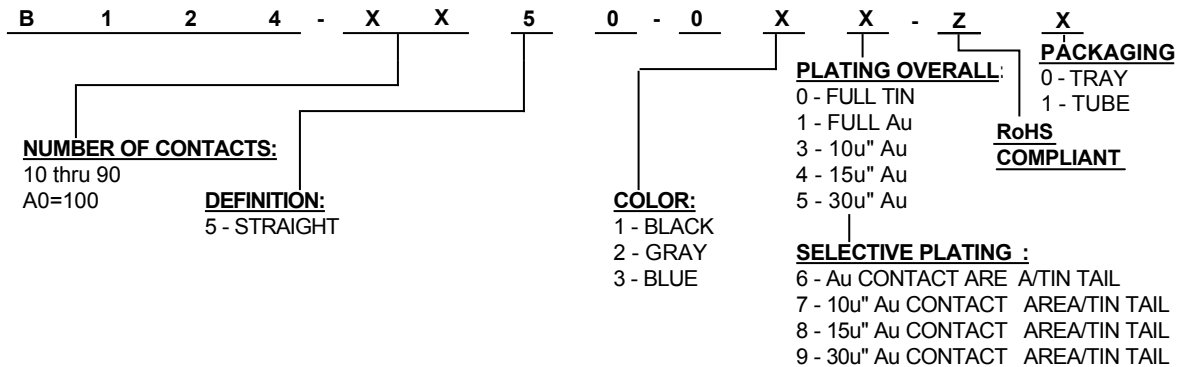

ELECTRICAL:

CURRENT RATING: 1.0 A
CONTACT RESISTANCE: < 20m Ω
INSULATOR RESISTANCE: > 1000M Ω
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40°C TO +105°C

MATERIAL:

INSULATOR: PA6T & 30% GLASS FIBER (UL94V-0)

Rev		Drawn	Checked	Approved	Date	
0	Issued	A.M.	S.M.	S.M.	02/01/96	SMP TECHNOLOGY, INC.
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	08/04/08	BOX HEADER , 1.27 x 2.54mm Pitch; Vertical; Thru Hole
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm						SERIES: B124-XX50-0XX-ZX Pg: 1