


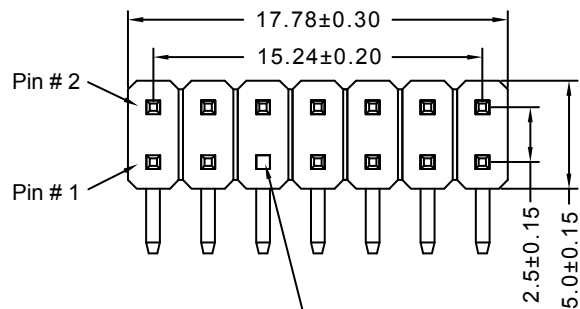


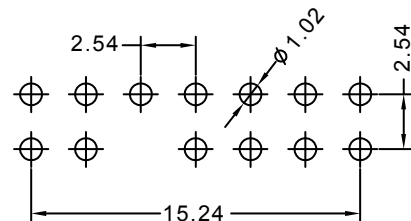

Pin # 5 Removed

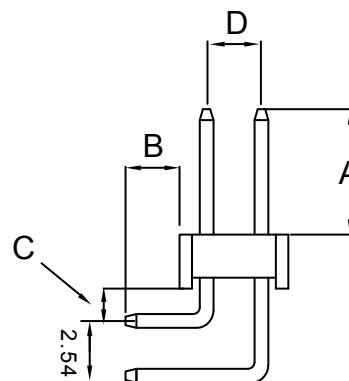

Recommened PCB Layout

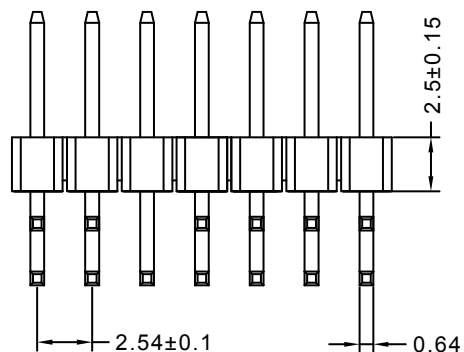

HOW TO ORDER:

DIMENSION NUMBER	A	B	C	D	NOTES:
0220	5.80	2.50	1.50	2.54	Pin #5 Removed

ELECTRICAL:

CURRENT RATING: 3A
 CONTACT RESISTANCE: < 30m Ω
 INSULATOR RESISTANCE: > 1000M Ω
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER, UL94V-0

H	2	1	2	-	0	2	2	0	-	1	4	0	-	Z
<u>CONTACT MATERIAL:</u> 1 - COPPER ALLOY			<u>DIMENSION NUMBER:</u> SEE DIMENSION NUMBER ABOVE			<u>NUMBER OF CONTACTS:</u> 01 thru 98 A0=100			<u>PLATING OVERALL:</u> 0 - FULL TIN			<u>RoHS COMPLIANT</u>		
			<u>NUMBER OF ROWS:</u> 2 - DOUBLE ROW											

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	06/01/17		
						Unshrouded Male Header, Thru Hole, Double Row, Right Angle, 2.54mm Height,	
						Pin # 5 Removed	
TOL. DEC. .X +/- 0.30 .XX +/- 0.20 .XXX +/- 0.10 ANGLE +/- UNIT: mm						P/N: H212-0220-140-Z	
						Pg: 1	