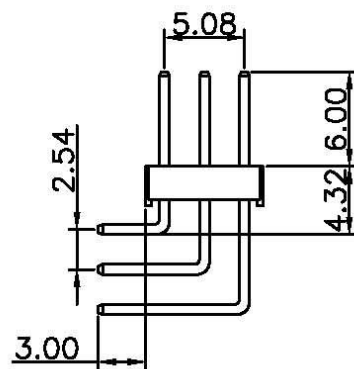
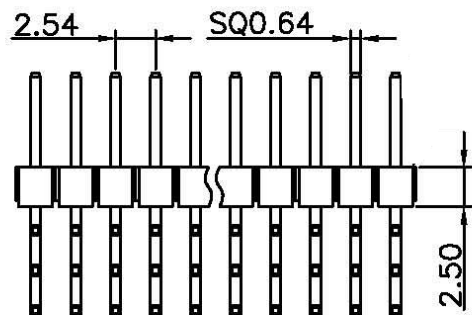
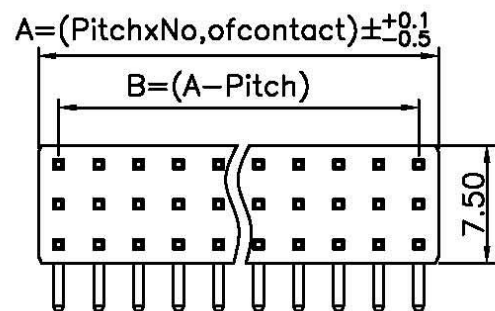


HOW TO ORDER:

H 2 1 3 - X X X X - X X X X - Z R

CONTACT MATERIAL:
1 - COPPER ALLOY

DIMENSION NUMBER:
SEE DIMENSION
NUMBER ABOVE

**NUMBER OF
CONTACTS:**
01 thru 98
A0=100

NUMBER OF ROWS:
3 - TRIPLE ROW

P.C.B LAYOUT

PLATING OVERALL:
0 - FULL TIN
1 - FULL Au FLASH
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

IR REFLOW
COMPATIBLE
260°C

**RoHS
COMPLIANT**

SELECTIVE PLATING:
6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

ELECTRICAL:

CURRENT: 1 AMP
CONTACT RESISTANCE: 30 Milliohms Max.
INSULATOR RESISTANCE: 1000 Megaohms Min
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL

INSULATOR OPTIONS: PBT & 30% Glass Fiber UL94V-0
NYLON 6T UL94V-0 (260 C Rated - 10 Sec) - Add R to Part Number
CONTACT: Copper Alloy
PLATING: Gold and/or Matte Tin over Microinches Nickel

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0 Issued	B.S.	S.M.	S.M.	1/10/08	
SCALE MAT'L FINISH					Pin Header, 2.54mm Pitch, Right Angle, 3 Row
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/- UNIT: mm	SERIES: H213 - XXXX - XXX-ZR