


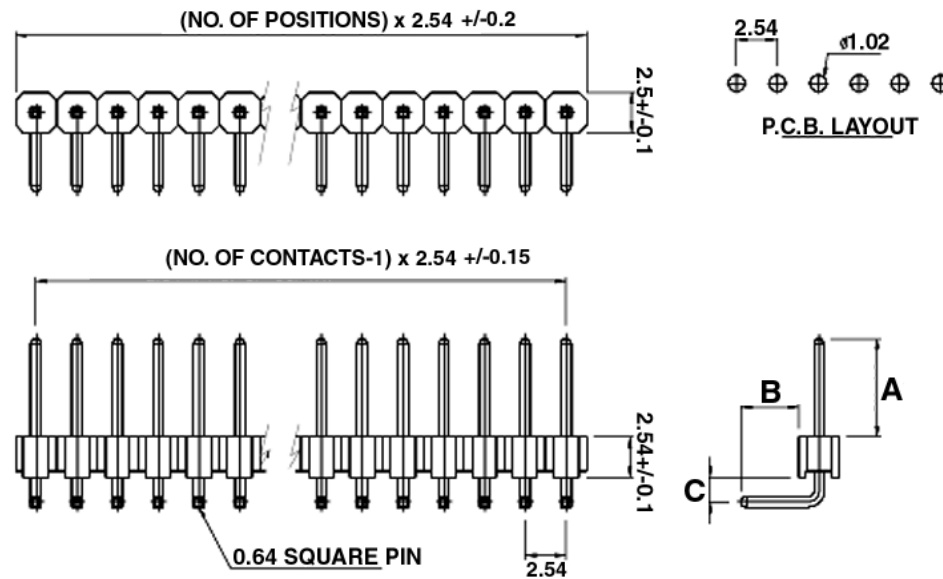

DIMENSION NUMBER	A	B	C
0200	5.85	3.05	1.40
0201	6.10	3.60	1.40
0202	5.84	2.29	1.40

ELECTRICAL:

CURRENT RATING: 3A
 CONTACT RESISTANCE: < 30m Ω
 INSULATOR RESISTANCE: > 1000M Ω
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER, UL94V-0

HOW TO ORDER:

H	2	1	1	-	X	X	X	X	-	X	X	X	-	Z
<u>CONTACT MATERIAL:</u> 1 - COPPER ALLOY		<u>NUMBER OF ROWS:</u> 1 - SINGLE ROW		<u>DIMENSION NUMBER:</u> SEE DIMENSION NUMBER ABOVE		<u>NUMBER OF CONTACTS:</u> 01 thru 98 A0=100		<u>PLATING OVERALL:</u> 0 - FULL TIN 1 - FULL Au FLASH 3 - 10u" Au 4 - 15u" Au 5 - 30u" Au		<u>SELECTIVE PLATING:</u> 6 - Au FLASH CONTACT AREA/TIN TAIL 7 - 10u" Au CONTACT AREA/TIN TAIL 8 - 15u" Au CONTACT AREA/TIN TAIL 9 - 30u" Au CONTACT AREA/TIN TAIL		<u>RoHS COMPLIANT</u>		

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	A.M.	S.M.	S.M.	10/01/97		
A	B.S.	S.M.	S.M.	08/13/08		
					PIN HEADER 2.54mm PITCH, RIGHT ANGLE	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	SERIES: H 2