

DIMENSION(mm)

DIMENSION NUMBER	A	B	C
50	2.80	2.60	6.20
51	6.00	2.60	6.20

* OTHER DIMENSIONS AVAILABLE


ELECTRICAL:

CURRENT RATING: 0.5A
 CONTACT RESISTANCE: < 30m Ω
 INSULATOR RESISTANCE: > 1000M Ω
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER, UL94V-0

HOW TO ORDER:

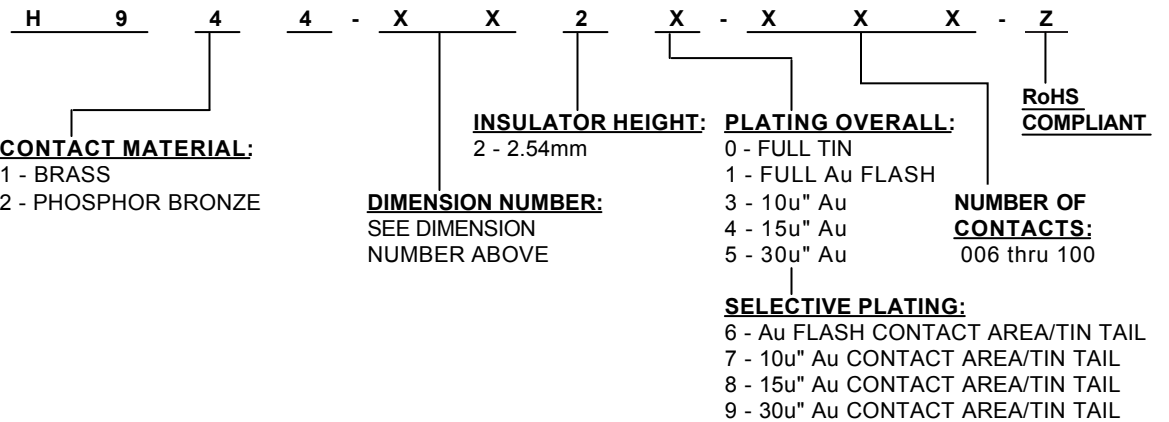

Rev	Drawn	Checked	Approved	Date
0	S.E.	S.M.	S.M.	10/01/97
A	B.S.	S.M.	S.M.	08/13/08

SMP TECHNOLOGY, INC.

PIN HEADER 1.27mm PITCH, 2.54mm ROW TO ROW

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

P / N: H944-XX2X-XXX-Z