

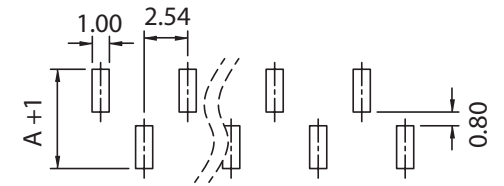


TYPE A

TYPE B



RECOMMENDED PCB LAYOUT
TYPE A

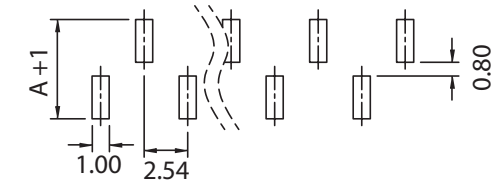

RECOMMENDED PCB LAYOUT
TYPE B

DIMENSION(mm)

DIMENSION NUMBER	A	B	C	D
0400	4.83	5.84	3.82	0.96
0401	4.86	6.20	3.20	1.14
0402	5.20	5.84	3.20	1.14
0403	4.83	10.67	3.20	1.14
0404	4.80	5.84	3.81	1.00
0405	5.08	5.30	4.10	1.28

* OTHER DIMENSIONS AVAILABLE


ELECTRICAL:

CURRENT RATING: 3A
 CONTACT RESISTANCE: < 20 milliohms Max.
 INSULATOR RESISTANCE: > 1000 Megohms Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -55° C TO +105° C
 INSULATOR: HIGH TEMPERATURE PLASTIC, UL94V-0

MATERIAL:

COPPER ALLOY

HOW TO ORDER:

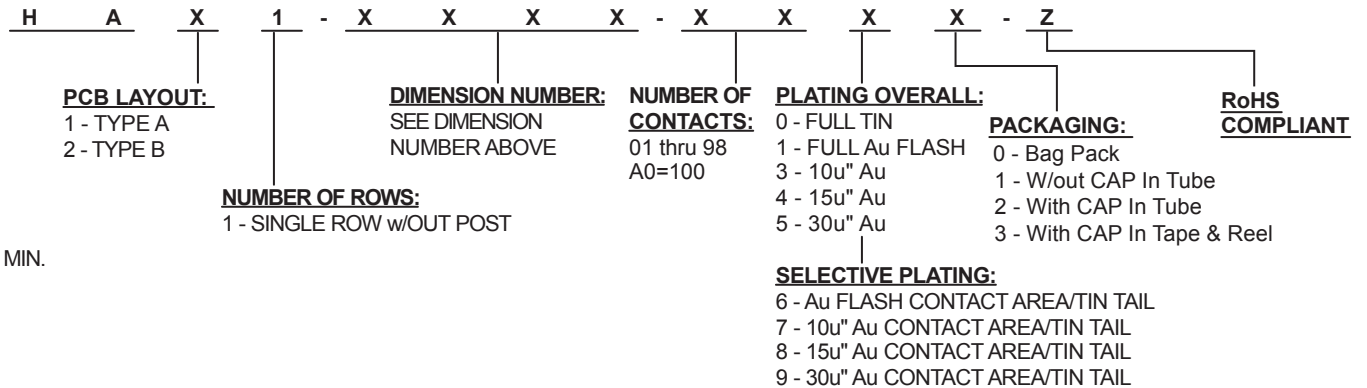

Rev	Drawn	Checked	Approved	Date
0	S.E.	S.M.	S.M.	10/1/97
A	A.M.	S.M.	S.M.	10/28/04
B	B.S.	S.M.	S.M.	6/12/07

SMP TECHNOLOGY, INC.

SCALE :N/A

Pin Header, Surface Mount, 2.54mm Pitch

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

P/N: HAX1 - XXXX - XXXX - Z