


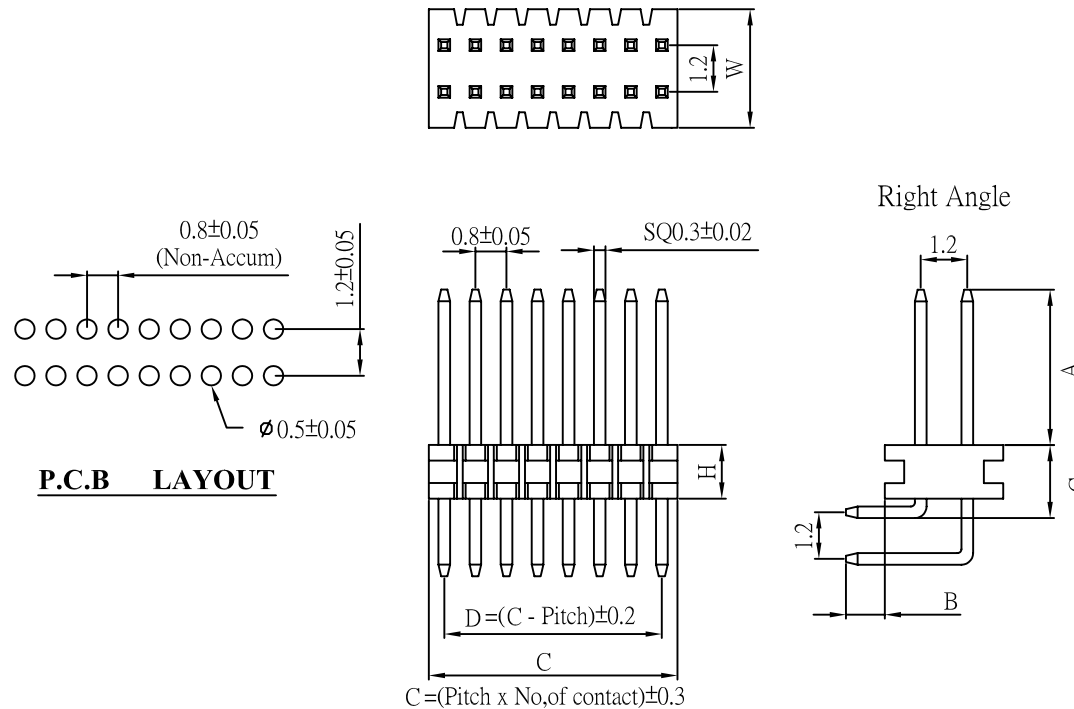

DOUBLE INSULATOR
0.8 x 1.2mm Insulator Thickness
DIMENSION TABLE

	A	B	C
01	2.80	2.00	2.40
02	1.90	2.00	2.40
03	4.45	2.00	2.40
04	3.05	2.00	2.40

HOW TO ORDER:

NUMBER OF ROWS:
6 - DOUBLE ROW -
0.3mm SQ. POST, Right Angle

NUMBER OF CONTACTS:
02-100
A0 = 100

INSULATOR TYPE:
1 - SINGLE INSULATOR

INSULATOR THICKNESS:
1 - 1.0(H) X 3.2 (W)

MOUNTING OPTIONS:
0 - WITHOUT PCB MTG. PEG

SEE DIMENSION TABLE

PLATING OVERALL:

0 - FULL TIN
1 - FULL Au FLASH
3 - 10u" Au
4 - 15u" Au
5 - 30u" Au

PACKAGING:
0 - TRAY
3 - TUBE W/OUT CAP

RoHS COMPLIANT

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

SPECIFICATIONS:

CURRENT RATING: 0.75A @ 80°C AMBIENT
OPERATING TEMP RANGE: -65°C TO +125°C
INSULATOR MATERIAL: NYLON-6T
CONTACT MATERIAL: PHOSPHOR BRONZE
MAX PROCESSING TEMP: 260°C FOR 10 SECONDS

Rev		Drawn	Checked	Approved	Date
0	Issued	WHS	S.M.	S.M.	08/23/06

SCALE N/A

TOL. DEC. .X +/- 0.2 .XX +/- .XXX +/- ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.

Pin Header, 0.8mm x 1.2mm, Dual Row 02-100 Contacts,

Single Insulator, Right Angle

SERIES: H L 6 1 - X X 1 0 - X X X X - Z