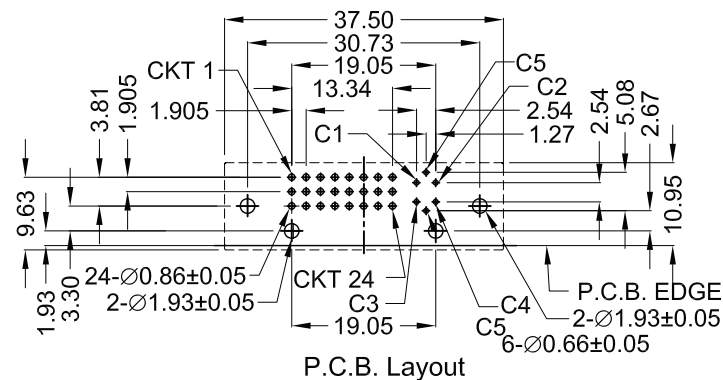

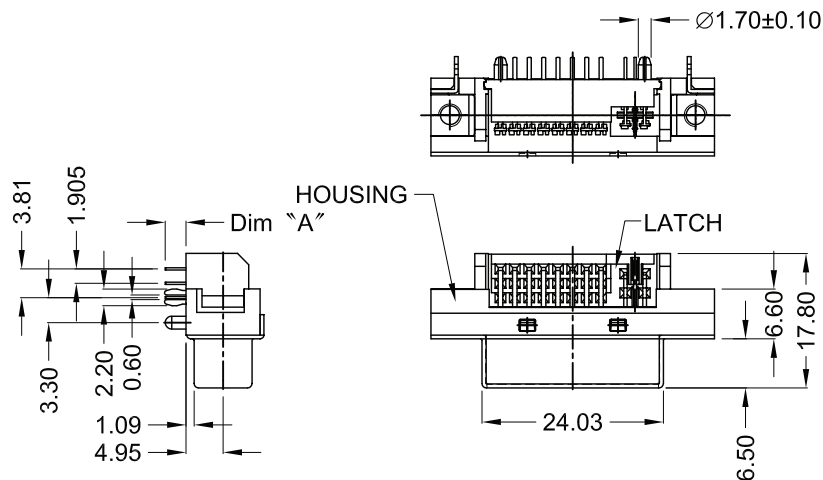


HOW TO ORDER:

1 0 0 8 - 2 9 2 X - 0 X X - Z

MATERIAL:

INSULATOR: NYLON 66+30%GF UL94V-0

CONTACT: COPPER ALLOY

CONTACT FINISH: GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

BOARDLOCK: BRASS, TIN PLATED

SHELL - SPCC

SPECIFICATION:

CURRENT RATING: 1.5 AMP

DIELECTRIC WITHSTANDING: 500V DC RMS.

INSULATION RESISTANCE: 1000 M Ω MIN.

CONTACT RESISTANCE: 20m Ω MAX.

OPERATING TEMPERATURE: -20°C~+85°C.

NO. of POSITIONS:

- 29

ORIENTATION:

2 - Right Angle

TAIL LENGTH "A" :

0 - 2.70mm

INSULATOR COLORS:

0 - White

1 - Black

2 - Red

HARDWARE:

0 - 4-40 Threaded Insert

1 - 4-40 Threaded Insert w/ Female Jackscrew Attached

2 - 4-40 Threaded Insert w/ Female Jack Screw (Bulk Packed)

PLATING OVERALL:

0 - Full Au Flash

4 - 10u" Au

5 - 15u" Au

7 - 30u" Au

SELECTIVE PLATING:

1 - Au Flash Contact Area/tin Tail

9 - 15u" Au Contact Area/tin Tail

A - 30u" Au Contact Area/tin Tail

**RoHS
COMPLIANT**

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. DVI Receptacle Connector, 24+5 Position Right Angle
0	Issued	B.S.	S.M.	S.M.	12/15/06	
A	Removed 3.30mm Tail Length Option	B.S.	S.M.	S.M.	05/01/13	
B	Added Insulator Color Options	B.S.	S.M.	S.M.	04/01/15	
TOL. DEC. .X +/- 0.38 .XX +/- 0.25 .XXX +/- 0.20 ANGLE +/- 5° UNIT: mm						P/N: I008-292X-0XX-Z