
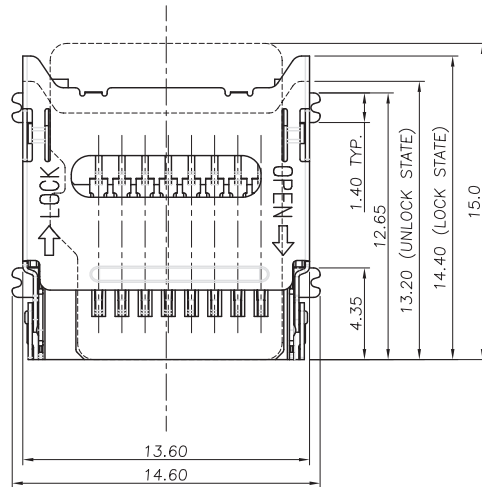
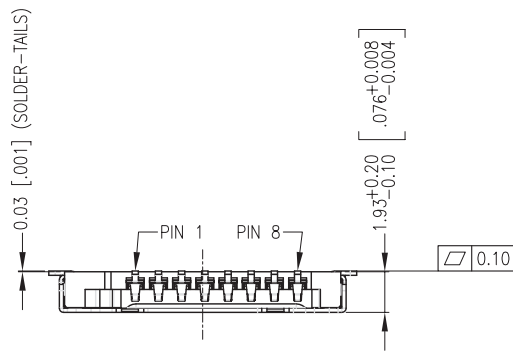


OPEN STATE

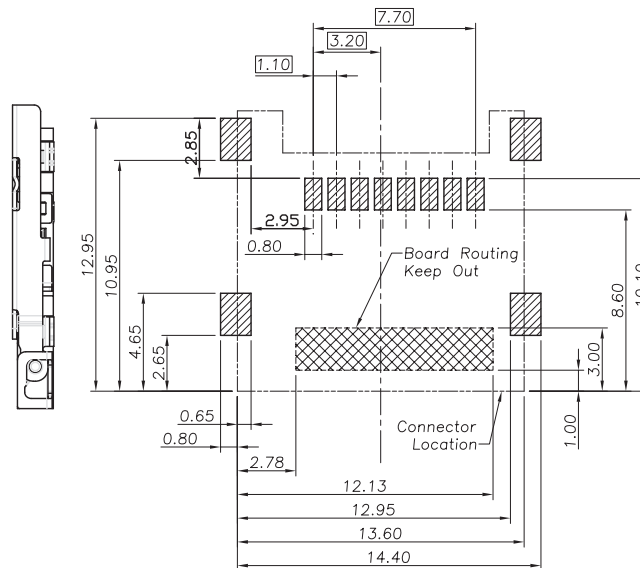

RECOMMENDED PCB LAYOUT

PIN NUMBERING FUNCTIONS

PIN #	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

MATERIAL:

HOUSING: LCP + 30% Glass Fill , UL94V-0

COLOR: Black

CONTACT: Phosphor Bronze

PLATING CONTACT AREA:

Selective Hard Gold over 50 microinches Nickel Underplate

PLATING SOLDERING ZONE:

120 Microinches min. 100 % Tin or Lead Free over 50

Microinches Nickel Underplate

Durability : 10,000 cycles

HOW TO ORDER:

M	C	1	4	-	2	0	0	0	-	1	0	1	1	-	Z	
											<u>STAND OFF HEIGHT:</u>		<u>PLATING:</u>		<u>RoHS COMPLIANT</u>	
											1 - 0.0 mm		0 - Full Au Flash 1 - 10u" Au - Selective			
											<u>ORIENTATION:</u>		<u>PACKAGING:</u>			
											0 - Top Mount		1 - Tape & Reel			

Rev		Drawn	Checked	Approved	Date
0	Issued	B.S.	S.M.	S.M.	06/20/10

SCALE:n/a

TOL. DEC. .X +/- 0.20 .XX +/- 0.15 .XXX +/- 0.10 ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.

Micro Secure Digital Connector; Top Mount ;0 mm Standoff; Hinge Type

P/N: MC14-2000-1011-Z

Pg: 1