

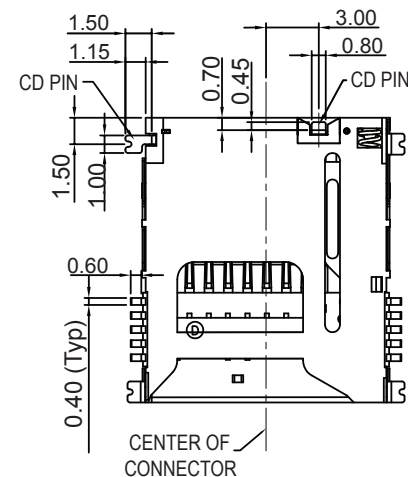
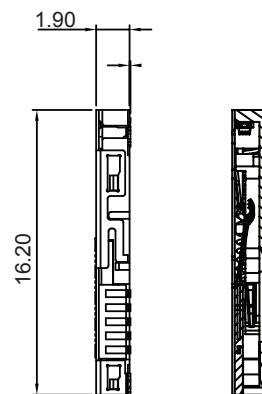
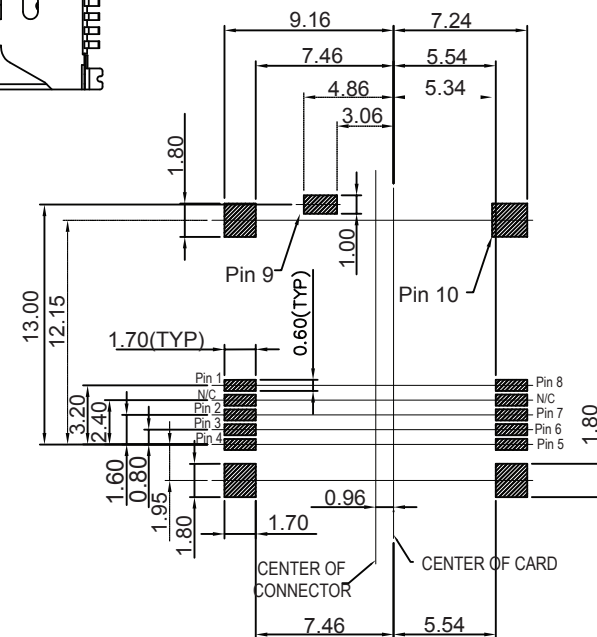


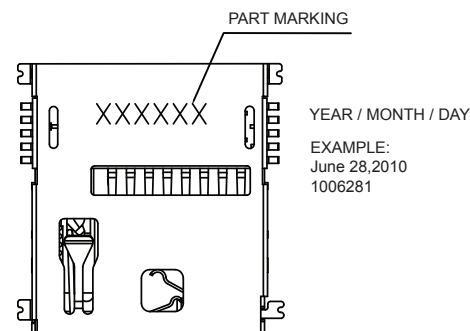

Pin #	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
9	CARD DETECT
10	CARD DETECT

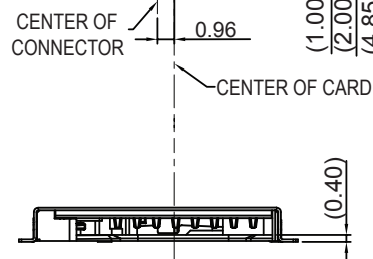

Durability : 5,000 cycles

M C 1 4 - 6 0 0 0 - 1 1 4 1 - Z

1 - 0.0 mm

ORIENTATION:

PLATING:

RoHS COMPLIANT

PACKAGING:

SMP TECHNOLOGY, INC.

Micro Secure Digital Connector; Reverse Mount ; 0 mm Standoff;Push -Push Type

SCALE:n/a

TOL. DEC. .X +/- 0.20 .XX +/- 0.15 .XXX +/- 0.10 ANGLE +/- UNIT: mm

P/N: MC14-6000-1141-Z