



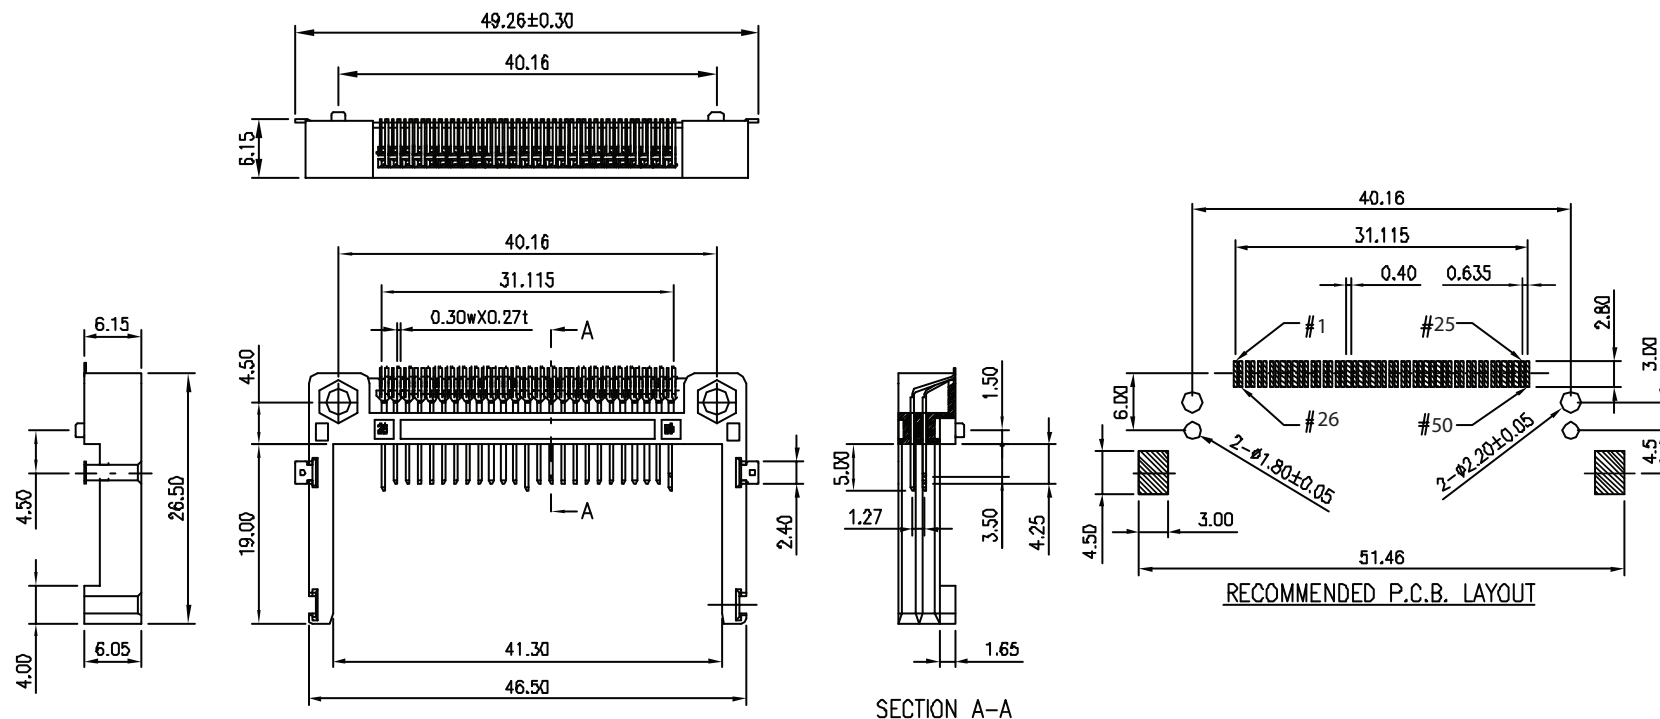

PIN NUMBER	DIM. L±0.10
1,13,38,50	5.00 mm
ALL OTHER PINS	4.25 mm
25,26	3.50 mm

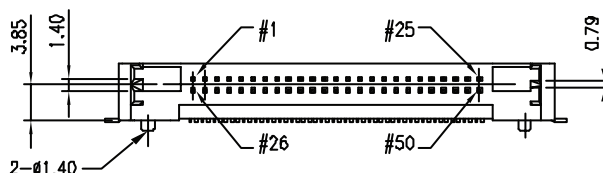

ELECTRICAL:

CURRENT RATING: 0.5AAC/DC Max
 VOLTAGE RATING: 100V AC
 CONTACT RESISTANCE: 40 mΩ Max.
 INSULATOR RESISTANCE: 1000 MΩ Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC for 1 Min.
 OPERATING TEMPERATURE: -40°C to +85°C

MATERIAL:

HOUSING: High Temperature Plastic, UL94V-0
 COLOR: Ivory
 CONTACT: Copper Alloy

MATERIAL:

INSERTION CYCLES: 10000 Times

HOW TO ORDER:

M	C	2	0-	5	0	1	X	-	3	2	X	-	Z
<u>LOCK NUTS OPTION:</u>				<u>STAND OFF HEIGHT:</u>			<u>ORIENTATION:</u>			<u>PLATING:</u>			
1 - w/ LOCK NUTS				3 - 1.65mm			2 - STANDARD (40.16)			1 - 5∞" Au - Selective			
2 - w/OUT LOCK NUTS										2 - 10∞" Au - Selective			
										3 - 15∞" Au - Selective			
										4 - 30∞" Au - Selective			
												<u>RoHS COMPLIANT</u>	

Rev	Apv.	Date	SMP TECHNOLOGY, INC.	
0	G.T.	09/20/05		
A	WHS	03/17/06	Compact Flash Memory Card Connector; 50 Position; Type I & Type II; 1.65mm Standoff	
SCALE:n/a			Standard Orientation, Surface Mount	
TOL. DEC.	.X +/- 0.20	.XX +/- 0.15	.XXX +/- 0.10	ANGLE +/- UNIT: mm
			P/N: MC20-501X-32X-Z	
			Pg: 1	