


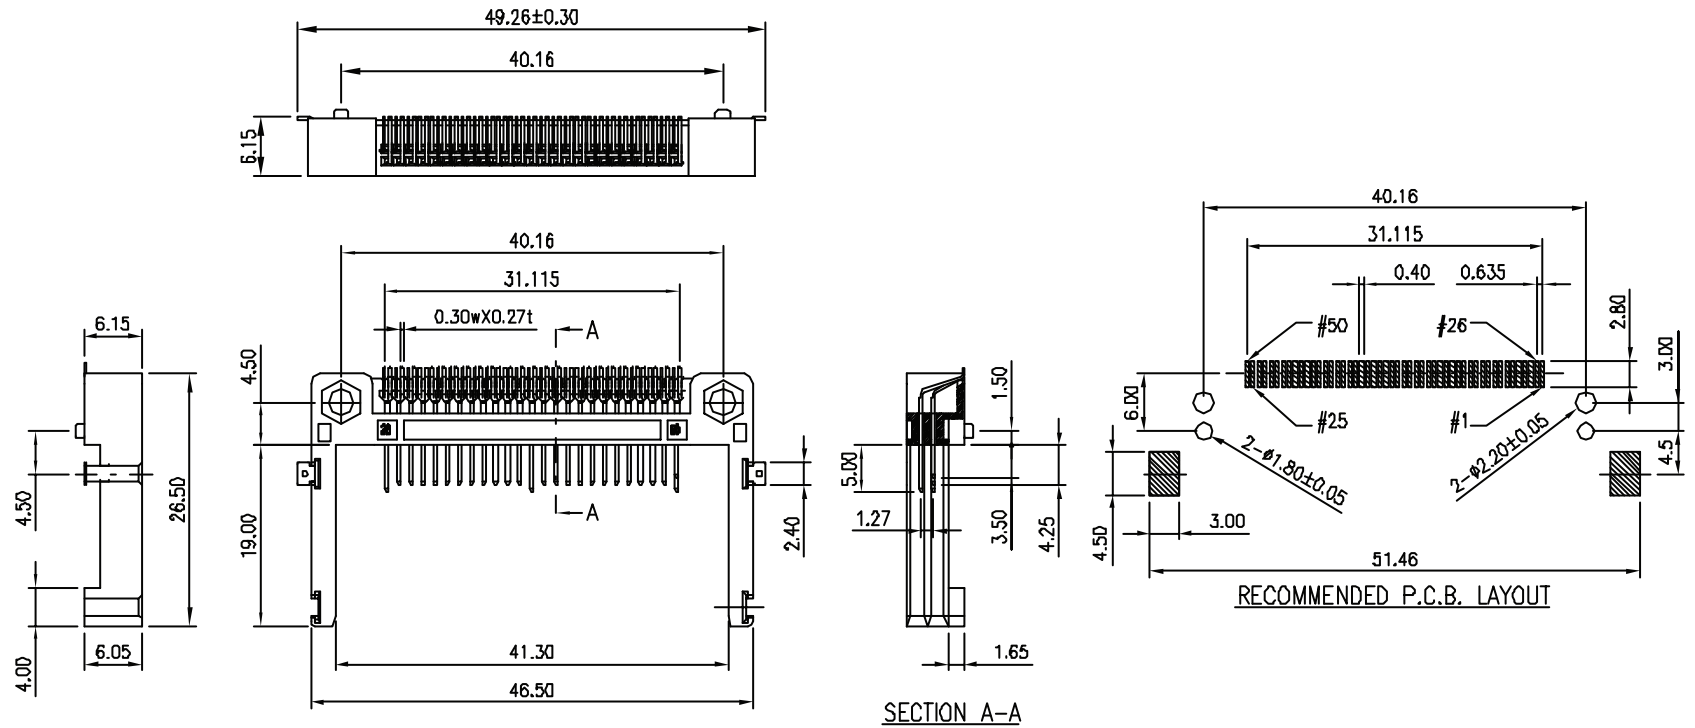

PIN NUMBER	DIM. L±0.10
1,13,38,50	5.00 mm
ALL OTHER PINS	4.25 mm
25,26	3.50 mm

ELECTRICAL:

CURRENT RATING: 0.5AAC/DC Max
 VOLTAGE RATING: 100V AC
 CONTACT RESISTANCE: 40 mΩ Max.
 INSULATOR RESISTANCE: 1000 MΩ Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC for 1 Min.
 OPERATING TEMPERATURE: -40°C to +85°C

MATERIAL:

HOUSING: High Temperature Plastic, UL94V-0
 COLOR: Ivory
 CONTACT: Copper Alloy

MATERIAL:

INSERTION CYCLES: 10000 Times

HOW TO ORDER:

M C 2 0- 5 0 1 X - 3 3 X - Z

LOCK NUTS OPTION:
 1 - w/ LOCK NUTS
 2 - w/OUT LOCK NUTS

STAND OFF HEIGHT:
 3 - 1.65mm

ORIENTATION:
 3 - REVERSE (40.16)

PLATING:
 1 - 50" Au - Selective
 2 - 100" Au - Selective
 3 - 150" Au - Selective
 4 - 300" Au - Selective

RoHS COMPLIANT

Rev	Issued	Apv.	Date	SMP TECHNOLOGY, INC.	
0	Issued	G.T.	09/20/05	Compact Flash Memory Card Connector; 50 Position; Type I Type II; 1.65mm Standoff	
SCALE:n/a				Reverse Orientation, Surface Mount	
TOL. DEC.	.X +/- 0.20	.XX +/- 0.15	.XXX +/- 0.10	ANGLE +/-	UNIT: mm
P/N: MC20-501X-33X-Z				Pg: 1	