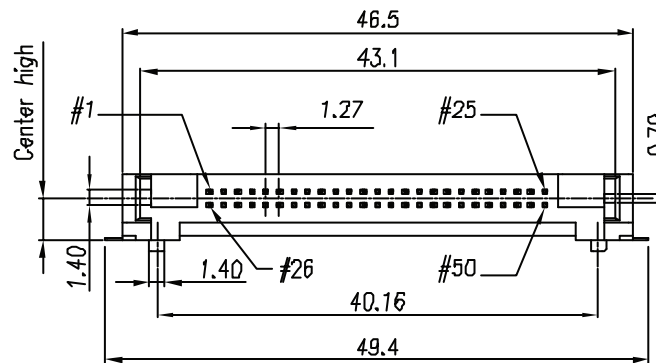
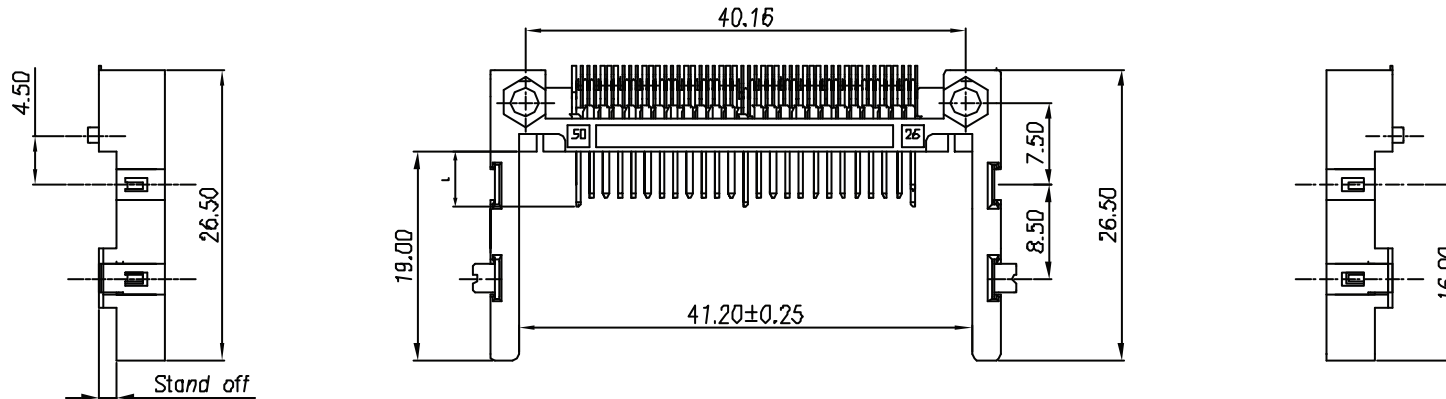


ELECTRICAL:

CURRENT RATING: 0.5A

VOLTAGE RATING: 100V AC

CONTACT RESISTANCE: 40 mΩ Max.

INSULATOR RESISTANCE: 1000 MΩ Max.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC for 1 Min.

OPERATING TEMPERATURE: -40°C to +85°C

MATERIAL:

HOUSING: High Temperature Plastic, UL94V-0

COLOR: Ivory

CONTACT: Copper Alloy

MATERIAL:

INSERTION CYCLES: 10000 Times

HOW TO ORDER:

M C 2 0 - 5 0 7 2 - 2 X X - Z

LOCK NUTS OPTION:

1 - w/ LOCK NUTS

2 - w/OUT LOCK NUTS

STANDOFF HEIGHT:

2 - 2.0mm

ORIENTATION:

2 - STANDARD

PLATING:

2 - Au Flash

3 - 15μ" Au - Selective

4 - 30μ" Au - Selective

RoHS COMPLIANT:

Rev	Apv.	Date
0	Issued	A.M.
		10/17/03

SCALE:n/a


TOL. DEC. .X +/- 0.20 .XX +/- 0.15 .XXX +/- 0.10 ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.

Compact Flash Memory Card Connector, 50 Position, Type I and Type II


Normal Orientation, 2.0 mm Standoff; Surface Mount

P/N: MC20-5072-20X-Z

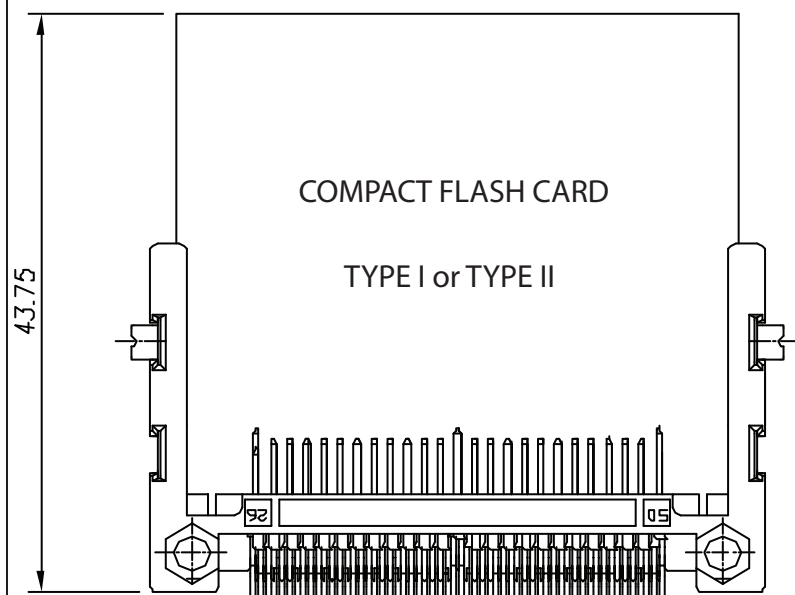

COMPACT FLASH CARD
TYPE I or TYPE II

CARD INSERTION

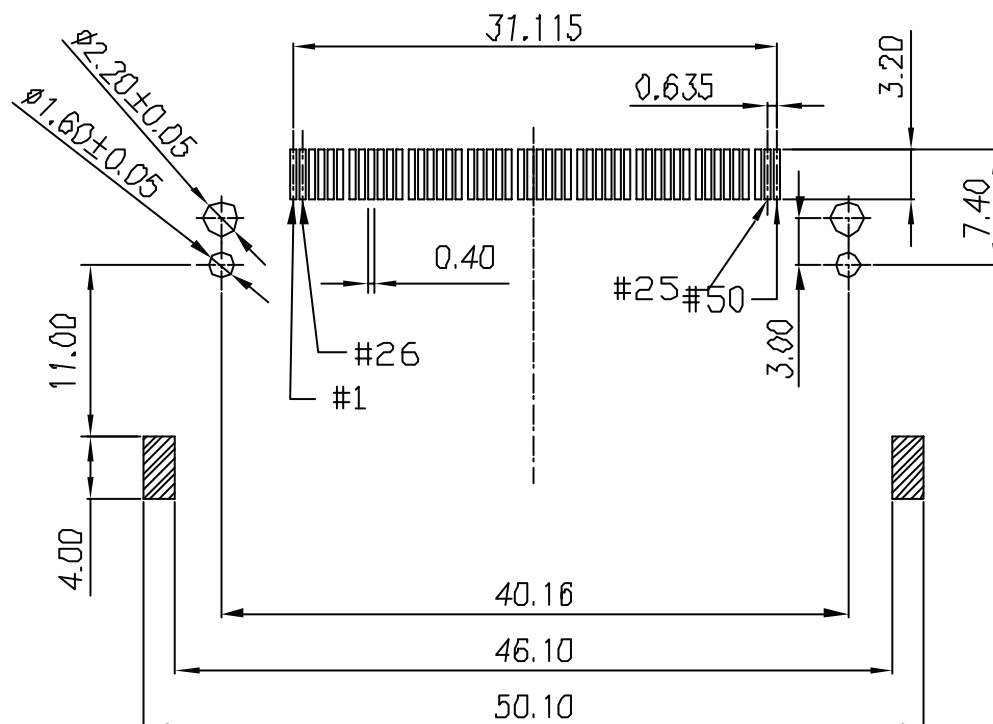

RECOMMENDED P.C.B LAYOUT

Rev		Apv.	Date	SMP TECHNOLOGY, INC. Compact Flash Memory Card Connector, 50 Posistion, Type I and Type II Normal Orientation, Surface Mount P/N: MC20-5072-22X-Z		
SCALE:n/a						
TOL. DEC.	.X +/- 0.20	.XX +/- 0.15	.XXX +/- 0.10	ANGLE +/-	UNIT: mm	Pg: 2