
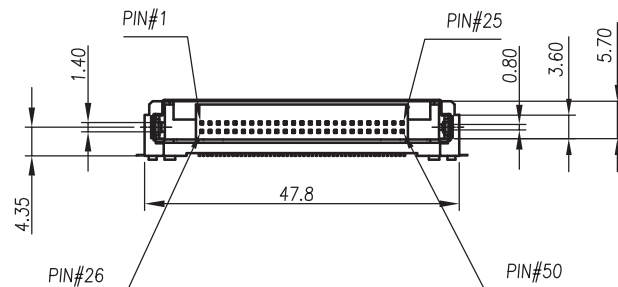
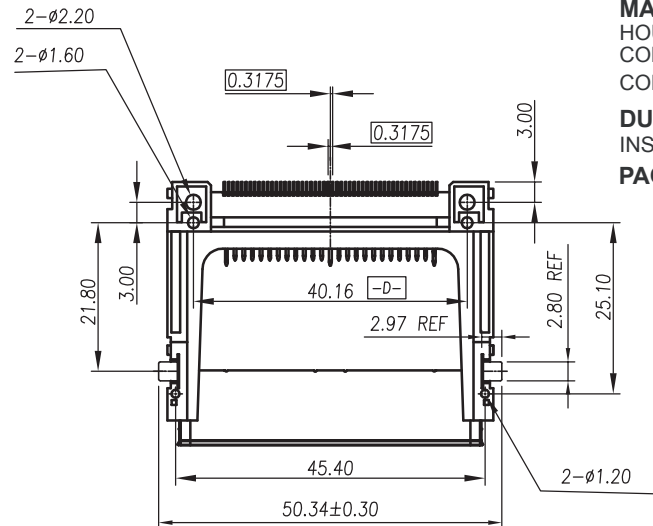
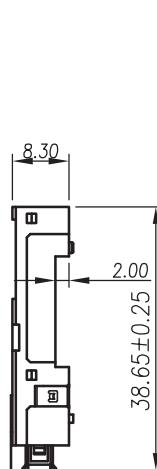


ELECTRICAL:
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 100V AC
 CONTACT RESISTANCE: 40 mΩ Max.
 INSULATOR RESISTANCE: 1000 MΩ Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC for 1 Min.
 OPERATING TEMPERATURE: -40°C to +85°C

MATERIAL:
 HOUSING: High Temperature Plastic, UL94V-0
 COLOR: Ivory
 CONTACT: Copper Alloy

DURABILITY:
 INSERTION CYCLES: 10000 Cycles
PACKAGING: Tray

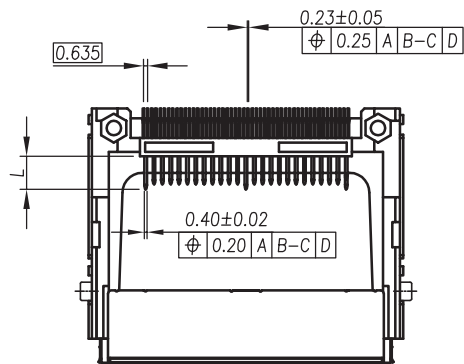

PIN NUMBER	DIM. L±0.10
1,13,38,50	5.00 mm
ALL OTHER PINS	4.25 mm
25,26	3.50 mm

HOW TO ORDER:

M C 2 0 - 5 0 A 4 - 2 2 X - Z

LOCK NUTS OPTION:

- 1 - w/ LOCK NUTS
- 2 - w/OUT LOCK NUTS
- 3 - w/ LOCK NUTS & WITH EJECTOR
- 4 - w/OUT LOCK NUTS & WITH EJECTOR

STAND OFF HEIGHT:

2 - 2.0mm

ORIENTATION:

2 - STANDARD (40.16)

PLATING:

- 1 - 5μ" Au - Selective
- 2 - 10μ" Au - Selective
- 3 - 15μ" Au - Selective
- 4 - 30μ" Au - Selective

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	G.T.	S.M.	S.M.	12/20/05		
A	G.T.	S.M.	S.M.	01/15/06	Compact Flash Memory Card Connector, 50 Position, Type I and Type II	
B	B.S.	S.M.	S.M.	6/6/07	Normal Orientation, Surface Mount	
SCALE:n/a					P/N: MC20-50A4-22X-Z	
TOL. DEC.	.X +/- 0.20	.XX +/- 0.15	.XXX +/- 0.10	ANGLE +/-	UNIT: mm	Pg: 1

