

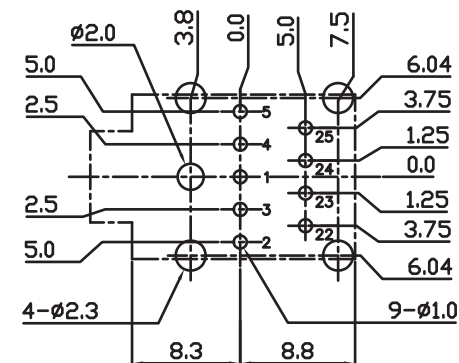
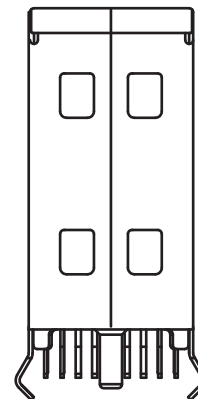
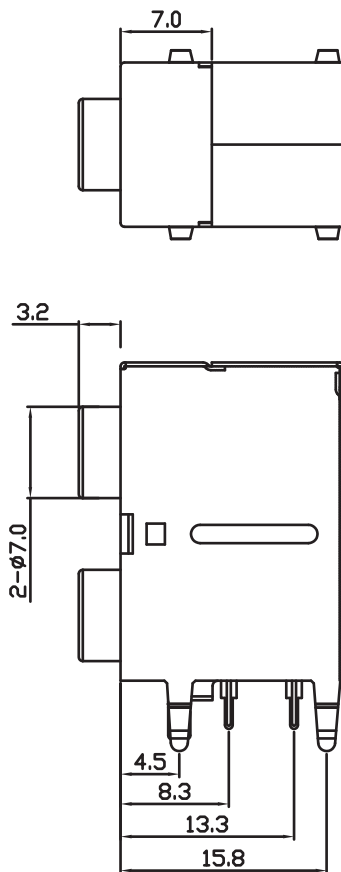


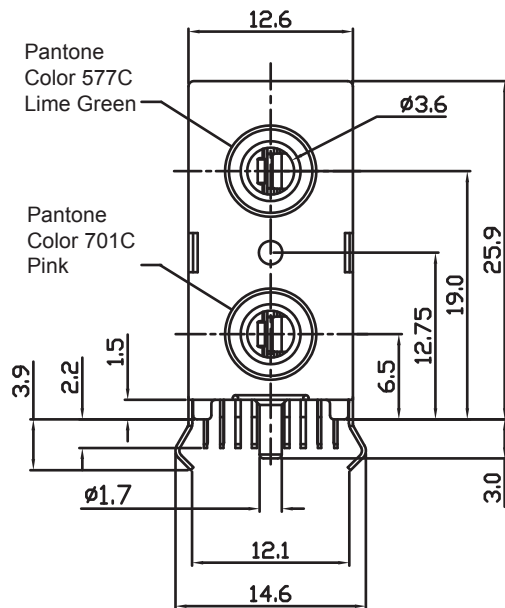

P.C.B LAYOUT
(BOTTOM VIEW)



NOTE:

Parts Meet PC99 Colors:
TOP JACK: Lime Green (577C)
BOTTOM JACK : Pink (701C)

ELECTRICAL:

VOLTAGE: 16 VDC
CURRENT: 0.3A
CONTACT RESISTANCE: 100 milliohm (Max.)
INSULATOR RESISTANCE: > 100 Mega ohms
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -25°C TO +85°C

MATERIAL:

INSULATOR: PBT ;UL94V-0
CONTACT: BRASS; Au Plated
SHIELD: BRASS; Tin Plated

HOW TO ORDER:

S **8** **0** **0** - **0** **1** **1** **1** - **0** **0** **A** - **Z**

TYPE NUMBER 01
SCHEMATIC NUMBER: SEE SCHEMATIC NUMBER ABOVE
STACK: 1 - Double
COLOR OPTION: A - (Top) Pantone 577C Lime Green; (Bottom) Pantone 701C Pink
RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Stereo Jack, 3.5mm, Fully Shielded - Double Stack, Pantone Color (577C, 701C) SERIES: S800 - 0111 - 00A - Z
0	D.H.	S.M.	S.M.	03/22/04	
A	D.H.	S.M.	S.M.	07/26/04	
A	B.S.	S.M.	S.M.	12/15/06	
SCALE MAT'L FINISH					Pg: 1
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/- UNIT: mm	