
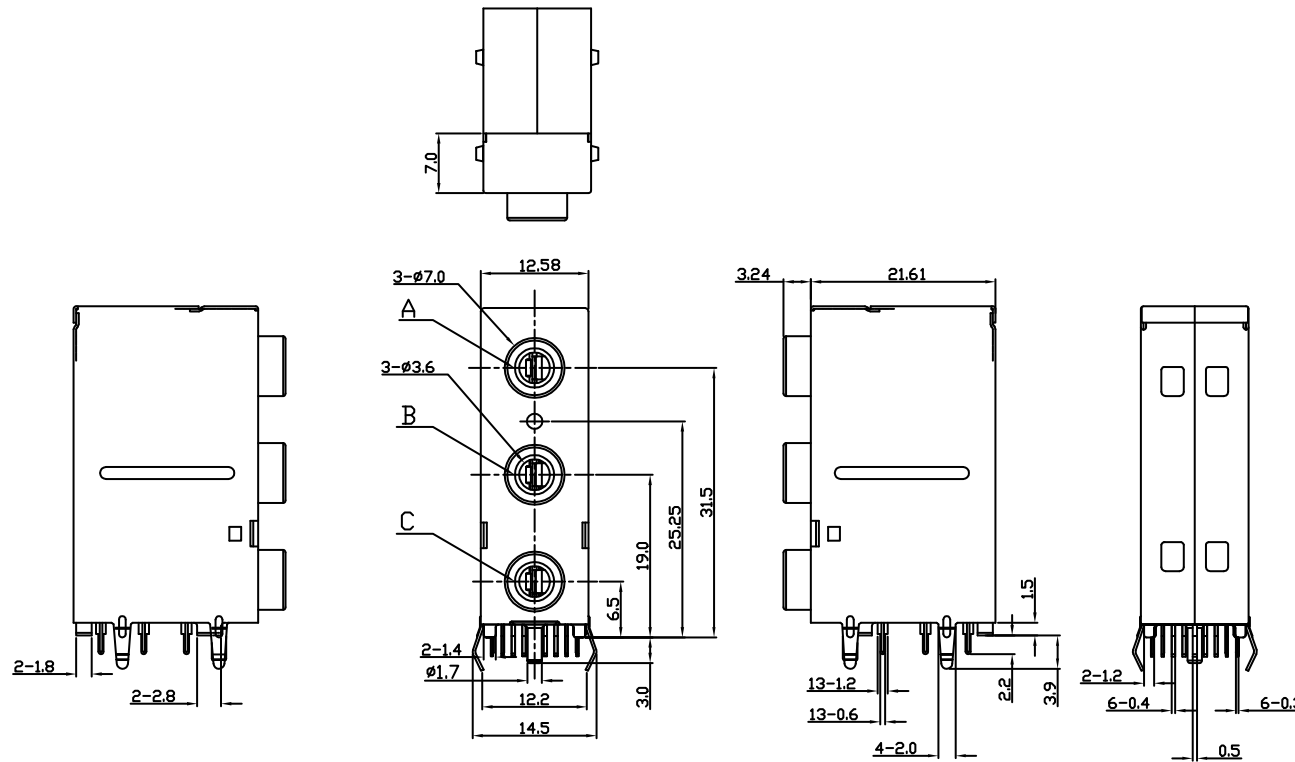


P.C.B LAYOUT
(BOTTOM VIEW)



NOTE:

Parts Meet PC99 Colors:
TOP JACK:
LIGHT BLUE COLOR [284C]
CENTER JACK:
LIME COLOR [577C]

BOTTOM JACK:
PINK COLOR [701C]

ELECTRICAL:

VOLTAGE: 16 VDC
CURRENT: 0.3A
CONTACT RESISTANCE: 100 milliohm (Max.)
INSULATOR RESISTANCE: > 100 Mega ohms
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -25°C TO +85°C

MATERIAL:

INSULATOR: PBT ;UL94V-0
CONTACT: Copper Alloy; Au Plated

HOW TO ORDER:

S 8 0 0 - 0 1 1 2 - 0 0 0 - Z

TYPE NUMBER: 01
SCHEMATIC NUMBER: SEE SCHEMATIC NUMBER ABOVE
STACK: 2 - Triple
RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Stereo Jack, 3.5mm, Stacked (3) High, Fully Shielded, Pantone Colors (284C, 577C, 701C) SERIES: S800 - 0112 - 000 - Z
0	Issued	D.H.	S.M.	S.M.	
A	Drawing Updated	D.H.	S.M.	S.M.	
B	Revised for RoHS Compliance	B.S.	S.M.	S.M.	
TOL. DEC. .X +/- 0.5 .XX +/- 0.3 .XXX +/- 0.15 ANGLE +/- 3° UNIT: mm					Pg: 1