
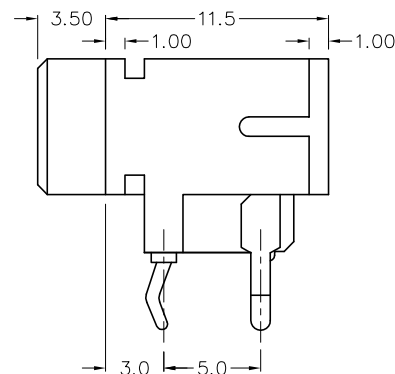
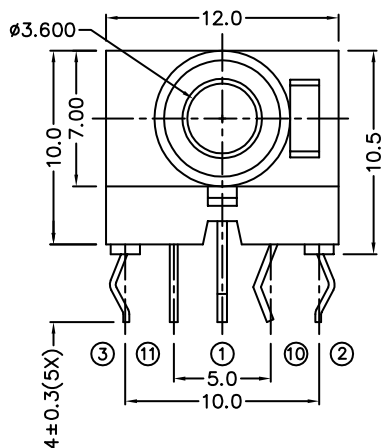



ISOMETRIC VIEW

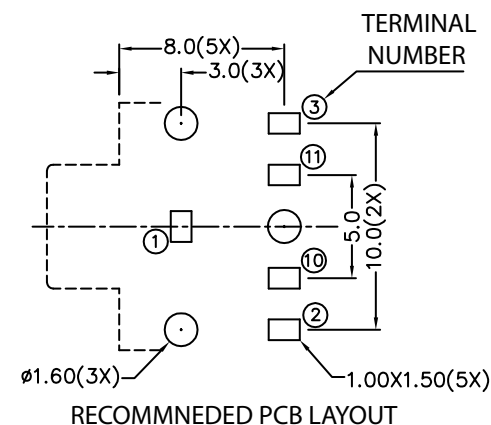

RECOMMENDED $\phi 3.5$ mm MATING PLUG

ELECTRICAL:

CURRENT: 0.5A
CONTACT RESISTANCE: < 50m
INSULATOR RESISTANCE: > 100M
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0
INSULATOR COVER - PBT
BUSHING: PBT
CONTACT SPRINGS: PHOSPHOR BRONZE
SHUNT TERMINALS: TIN PLATED BRASS
GROUND TERMINALS: TIN PLATED BRASS

PART NUMBER	S800-0710-100-Z	S800-0720-100-Z	S800-0730-100-Z	S800-0740-100-Z	S800-0750-100-Z
SCHEMATIC					

HOW TO ORDER:

S **8** **0** **0** - **0** **7** **X** **0** - **0** **0** **0** - **Z**
TYPE NUMBER SCHEMATIC NUMBER: BACK COVER OPTION RoHS COMPLIANT
 07 SEE SCHEMATIC NUMBER ABOVE 0 - PANTONE BODY/ PANTONE BODY

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	S.E.	S.M.	S.M.	6/9/98	
A	B.S.	S.M.	S.M.	07/23/08	Stereo Jack 3.5mm; All Plastic Bushing ; Non Threaded
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm					P/N: S800-07X0-000-Z
					Pg: 1