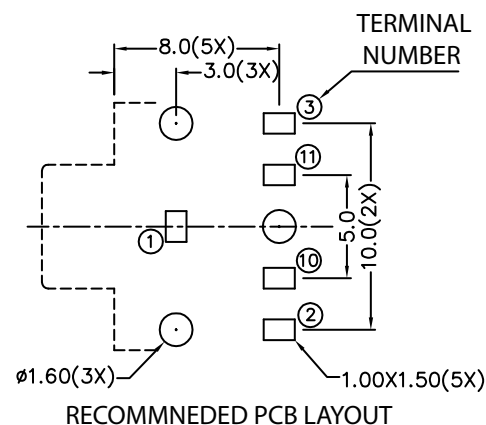
RECOMMENDED $\varnothing 3.5$ mm MATING PLUG

ELECTRICAL:

CURRENT: 0.5A

CONTACT RESISTANCE: < 50m

INSULATOR RESISTANCE: > 100M

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

BUSHING: NICKEL PLATED BRASS

CONTACT SPRINGS: PHOSPHOR BRONZE

SHUNT TERMINALS: TIN PLATED BRASS

GROUND TERMINALS: TIN PLATED BRASS

PART NUMBER	S800-0710-010-Z	S800-0720-010-Z	S800-0730-010-Z	S800-0740-010-Z	S800-0750-010-Z
SCHEMATIC					

HOW TO ORDER:

S 8 0 0 - 0 7 X 0 - 0 1 0 - Z

TYPE NUMBER
07

SCHEMATIC NUMBER:
SEE SCHEMATIC
NUMBER ABOVE

RoHS
COMPLIANT

Rev		Drawn	Checked	Approved	Date
0	Issued	S.E.	S.M.	S.M.	6/9/98
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08

SMP TECHNOLOGY, INC.

Stereo Jack 3.5mm; All Metal Bushing ;Threaded