

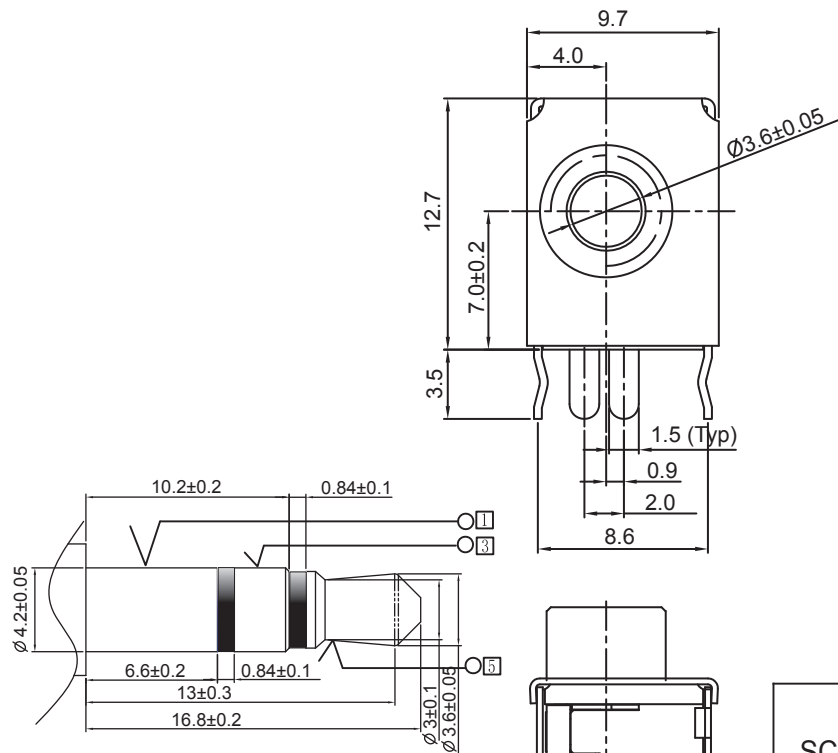


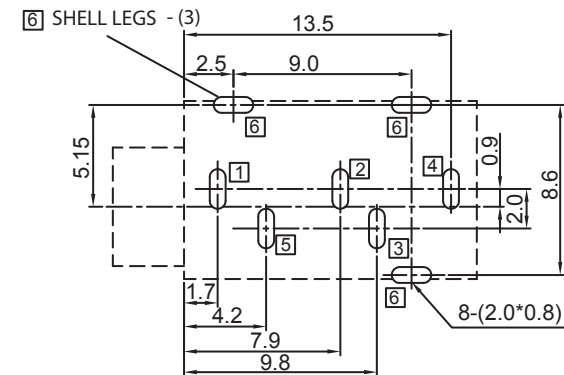

RECOMMENDED MATING PLUG

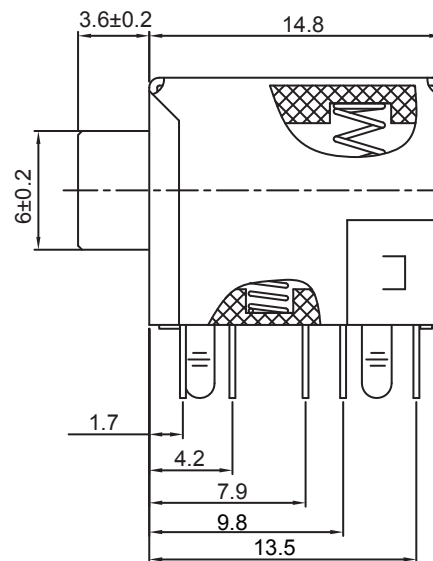

RECOMMENDED PCB LAYOUT
BOTTOM VIEW

ELECTRICAL:

RATING: DC 30V 0.5A

CONTACT RESISTANCE: < 30mΩ

INSULATOR RESISTANCE: > 100MΩ

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

BUSHING: NICKEL PLATED BRASS

CONTACT SPRINGS: PHOSPHOR BRONZE

SHUNT TERMINALS: TIN PLATED BRASS

GROUND TERMINALS: TIN PLATED BRASS

TERMINAL #4 - SILVER PLATED

SCHEMATIC						
PART NUMBER	S800-0910-3260-Z	S800-0920-3260-Z	S800-0930-3260-Z	S800-0940-3260-Z	S800-0950-3260-Z	S800-0960-3260-Z

HOW TO ORDER:

S	8	0	0	-	0	9	X	0	-	3	2	6	0	-	Z	
																RoHS COMPLIANT
																PACKAGING 0 - Tray

TYPE NUMBER
09

SCHEMATIC NUMBER:
SEE SCHEMATIC
NUMBER ABOVE

BUSHING OPTION
6 - Shielded

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	B.S.	S.M.	S.M.	09/23/15		
Issued					Stereo Jack 3.5mm, 12.7mm High, 9.7mm Wide, All Metal Bushing	
					Non Threaded, Fully Shielded	
TOL. DEC.	X.X +/- 0.3	X.XX +/- 0.3	X.XXX +/- 0.3	ANGLE +/- 2°	UNIT: mm	SERIES: S800-09X0-3260-Z
						Pg: 1