
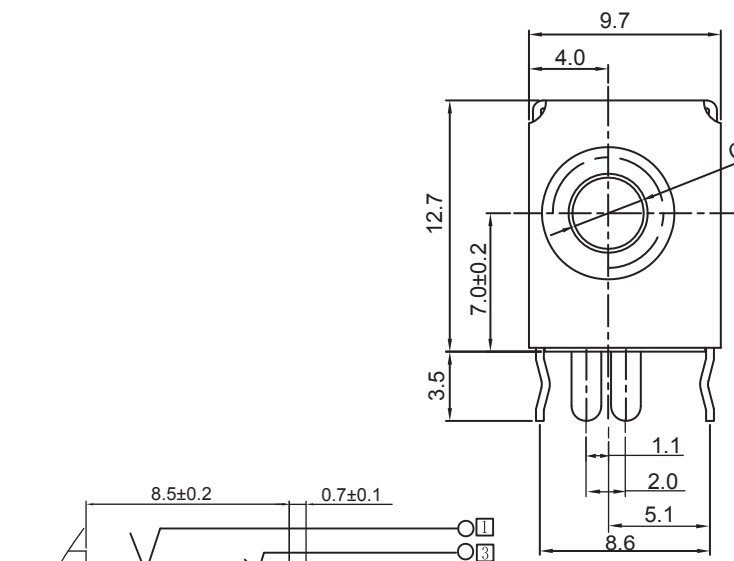
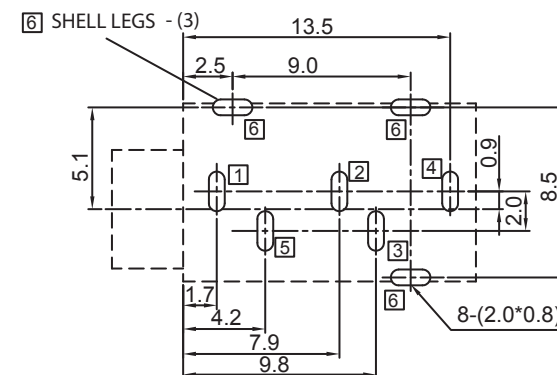
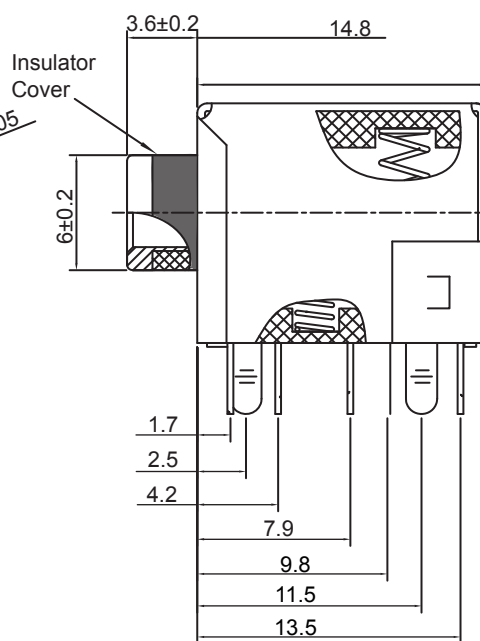


RECOMMENDED MATING PLUG

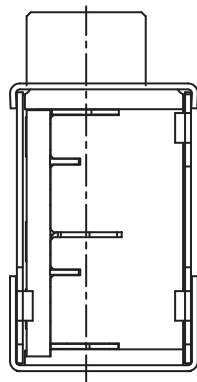

RECOMMENDED PCB LAYOUT
BOTTOM VIEW

ELECTRICAL:

CURRENT: DC 30V 0.5A

CONTACT RESISTANCE: < 30mΩ

INSULATOR RESISTANCE: > 100MΩ

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

BUSHING: NICKEL PLATED BRASS

CONTACT SPRINGS: PHOSPHOR BRONZE

SHUNT TERMINALS: TIN PLATED BRASS

GROUND TERMINALS: TIN PLATED BRASS

TERMINAL #4 - SILVER PLATED PHOSPHOR BRONZE

SCHEMATIC						
PART NUMBER	S800-0910-3360-Z	S800-0920-3360-Z	S800-0930-3360-Z	S800-0940-3360-Z	S800-0950-3360-Z	S800-0960-3360-Z

HOW TO ORDER:

S 8 0 0 - 0 9 X 0 - 3 3 6 0 - Z
 TYPE NUMBER SCHEMATIC NUMBER: RoHS COMPLIANT
 09 SEE SCHEMATIC NUMBER ABOVE

PACKAGING

0 - Tray

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	B.S.	S.M.	S.M.	09/23/15		
Issued						Stereo Jack 3.5mm, 12.7mm High, 9.7mm Wide,
						Fully Shielded, Metal Bushing with Insulator Cover on Outer Diameter
TOL. DEC. X.X +/- 0.3 X.XX +/- 0.3 X.XXX +/- 0.3 ANGLE +/- 2° UNIT: mm						SERIES: S800-09X0-3360-Z Pg: 1